Compress

APRIL 1950

PERMANENT FILE

LITERATURE

Return this copy to
Advertising Division
Ingersoll-Rand
Phillipsburg, New Jersey

File _____

X-1850 2M 10-54

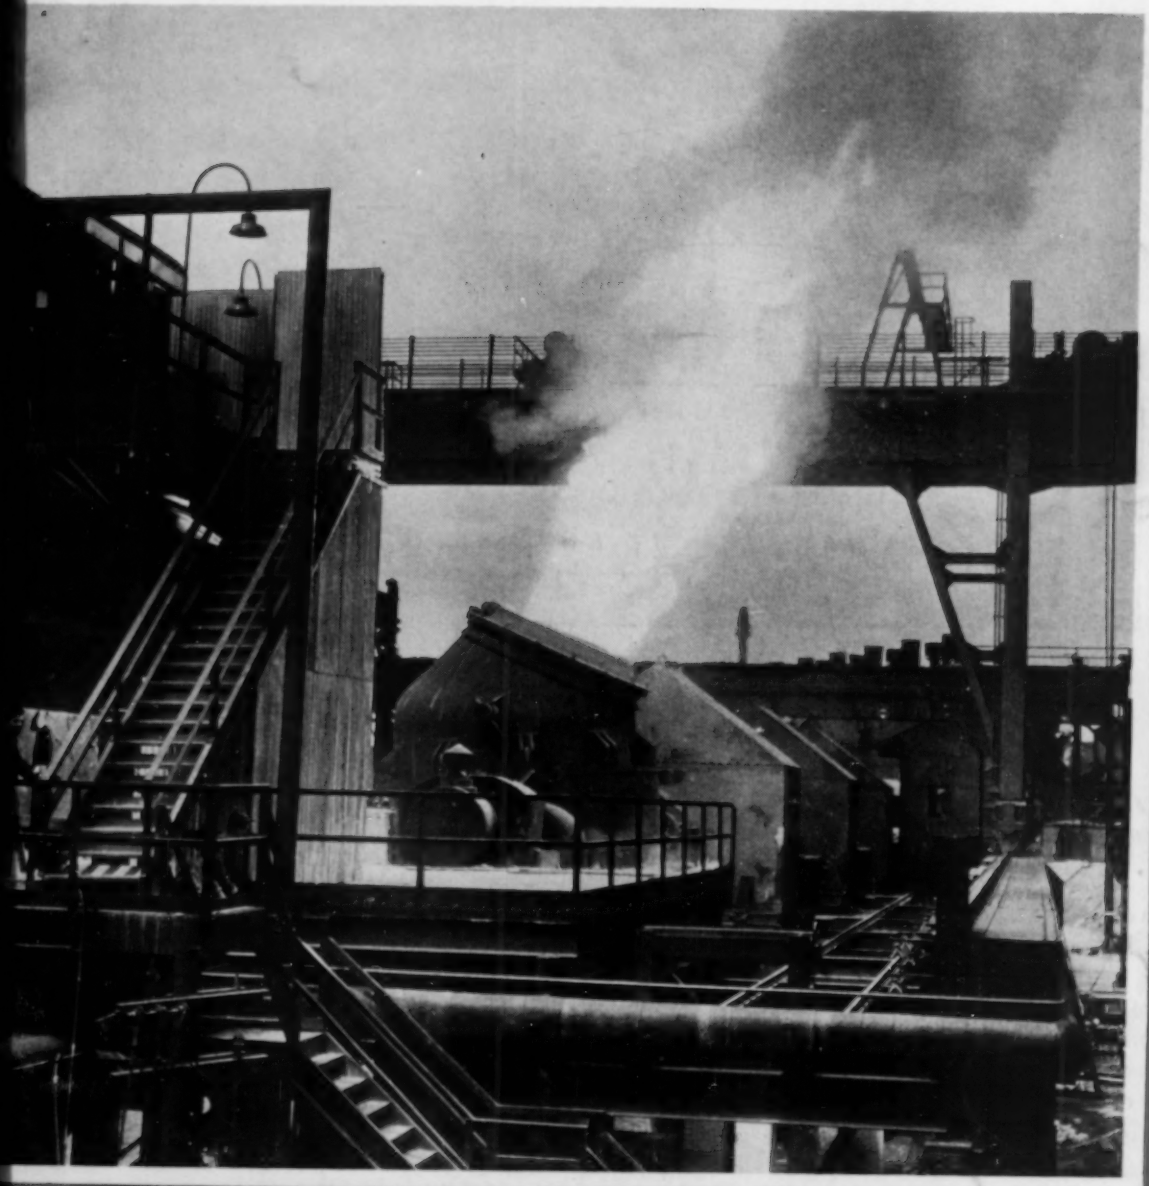

U. S. STEEL PHOTO

BLOWING 25 TONS OF MOLTEN METAL

National Tube Company's new all-welded Bessemer converter at Lorain, Ohio

VOLUME 55 • NUMBER 4

NEW YORK • LONDON

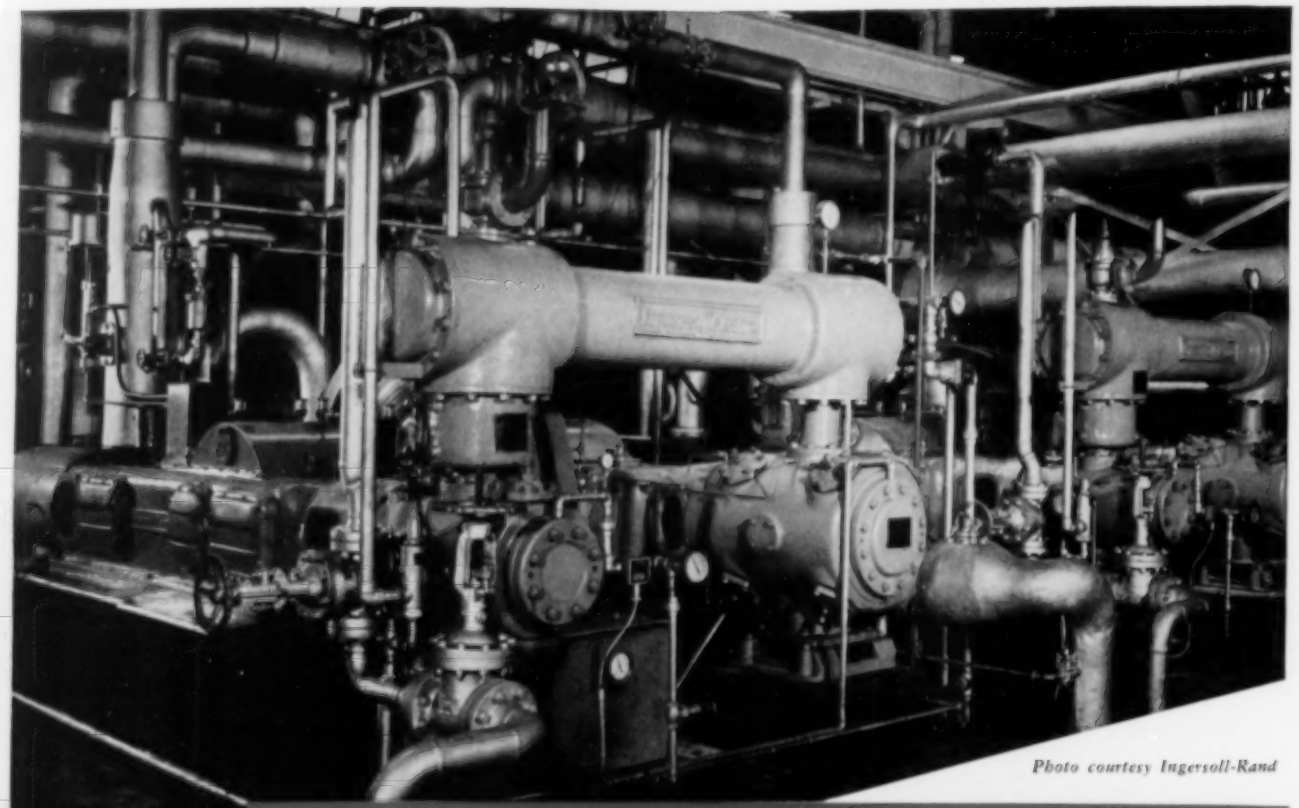

Photo courtesy Ingersoll-Rand

USE THE OIL THAT'S RIGHT FOR YOUR COMPRESSORS

You'll find it in Texaco's complete line of air compressor oils

NO ONE oil can do all things for all compressors. Different pressures and other operating conditions require different types of oil. So Texaco has developed *a complete line* of air compressor oils. They are your assurance of top efficiency and rock-bottom maintenance costs whatever the type of your compressor or the operating conditions.

Your Texaco Lubrication Engineer, for example, will recommend Texaco straight mineral oils for normal conditions, and Texaco compounded oils where water conditions prevail . . . Texaco inhibited oils for rust prevention . . . or special heavy-duty oils where service is severe and carbon and gum formations are problems.

Follow the Texaco recommendation and you can be sure of free rings . . . clean valves and clear air lines . . . reduced wear of all moving parts. Just call the nearest of the more than 2,000 Texaco Wholesale Distributing Plants in the 48 States, or write The Texas Company, 135 East 42nd Street, New York 17, New York.

TEXACO

TEXACO Air Compressor Oils

FOR ALL OPERATING CONDITIONS

TUNE IN . . . TEXACO STAR THEATER starring MILTON BERLE on television every Tuesday night. See your local newspaper for time and station.

EXCLUSIVE *DOUBLE ACTION PRINCIPLE* GUARANTEES BOTH CLEAN AND DRY AIR

1. MECHANICAL SEPARATION

Deflector cup directs flow of air or gas together with water, oil and dirt to the walls of the housing and thence downward at high velocity into the base where liquid and heavier dirt particles are deposited.

2. FILTRATION

Air or gas, having been mechanically cleaned, rises at low velocity through the Radial Fin Filtering element or insert which removes the lighter airborne material.

The popularity of Staynew Double Action Pipe Line Filters increases as manufacturing tolerances decrease—as vanes and pistons are closer fitted, orifices are made smaller, machines in general are built to more precise limits and processes are more scientifically controlled. Inexpensive, quickly installed and easily maintained, these filters provide highest filter efficiency with low overall maintenance.

IMPORTANT APPLICATIONS

Protection of Air-operated Tools ★ Paint Spray ★ Sand Blast ★ Air Displacement of Liquids ★ Air-operated Instrument Controls Liquid Agitation

COMPLETE DATA ON REQUEST

DOLLINGER CORPORATION

DOLLINGER PROTECTOMOTOR STAYNEW FILTERS

7 CENTRE PARK ROCHESTER 3, N. Y. IN CANADA: McCarthy and Robinson, Toronto; Engineering Equipment Co., Montreal

MORE THAN 1,000,000 STAYNEW PIPE LINE FILTERS SOLD TO INDUSTRY

THIS NEW

DB-35 DRIFTER and 48″ ALUMINUM SHELL

SAVES THREE WAYS!

1

28% LESS AIR
with the NEW DB-35 Drifter

Ingersoll-Rand's new DB-35 Drifter, with the patented double-kicker port valve, has been especially designed to increase operating economy. Tests prove that this new drifter actually requires 28% *less air* per foot of hole drilled! What's more, the new design has resulted in stronger rotation, better hole cleaning ability and improved feeding qualities. These combined features give you a rugged, heavy-duty drifter that will even surpass the record-breaking performance of Ingersoll-Rand's famous DA-35 Drifter.

2

33% FEWER STEEL CHANGES
with the NEW Lightweight 48-inch Aluminum Shell

The greater length of this new shell permits the use of longer drill steels—with 33% fewer steel changes for a given footage. Its lightweight all-aluminum construction cuts shell weight almost in half! In fact, it's even lighter than the old-style 30-inch steel shell and has equal or better life. This light weight is particularly important when drilling from a column or bar.

3

50% MORE DRILLING SPEED
when Carset Jackbits are used

These longer-wearing, faster-drilling Carset Jackbits, tipped with tungsten carbide, enable you to take *full advantage* of the potential savings offered by the new I-R drifter combination. Often drilling speeds can be increased by 50% or more, tonnage can be boosted 20% or better and dynamite requirements can be cut as much as 30%. These savings, together with the many other proved advantages of I-R Carset Jackbits, set an all-time high in economy and performance.

THIS COMBINATION *is ideal for use with the famous I-R Drill Jumbo Mounting. For complete information check with your nearest Ingersoll-Rand office today. Let our engineers tell you more about this new cost-cutting combination.*

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y. 499-5

ROCK DRILLS • COMPRESSORS • AIR TOOLS • TURBO-BLOWERS
CONDENSERS • CENTRIFUGAL PUMPS • OIL & GAS ENGINES

CARSET JACKBIT
SET WITH CARBOLOY INSERTS

Until we meet personally...

FOR MANY DECADES Blaw-Knox has been a pacemaker of American initiative and ingenuity. Blaw-Knox products and services have enabled basic industry in its efforts to speed production, improve quality and reduce costs. As an indication of how Blaw-Knox can serve you . . . we'd like you to have a copy of the booklet, illustrated at right, which describes briefly the scope of the company's activities. A request will bring you information promptly.

BATCHING PLANTS
For concrete construction—Bins, batching plants, truck mixer loading plants, and central mixing plants are offered in many sizes and variations for both fixed and portable installations.

CLAMSHELL BUCKETS
Blaw-Knox builds the largest and most complete line of clamshell buckets made in America. A size and type for every need.



SUBGRADER, SPREADER, FINISHER
For concrete roads and airports—These three machines work as a team giving final preparation to the road bed, spreading the concrete evenly and finishing the surface.

TRUKMIXERS
The Blaw-Knox Trukmixer is the result of years of study. It excels in high yardage production and trouble-free performance. The revolving hopper eliminates many costly delays often caused by wear, leakage and seal failures.

ADNUN BLACK TOP PAVER
For bituminous roads and airports. This is the only machine of its kind that accurately lays hot or cold asphaltic mixes, sand, cinder, slag, soil, cement, chips and stone.



MULTI-FOOTE CONCRETE PAVERS
Large 34 E Duomix double-drum model delivers 34 cu. ft. of mix every 35 seconds. 27 E and 34 E Single Mix have same strong, simple construction. Anyone who drives a truck can handle these big, fast mixers.

ROLLING MILL EQUIPMENT
Blaw-Knox supplies rolling mills and rolling mill equipment to the steel, aluminum and other non-ferrous industries.

ROLLS FOR ROLLING MILLS
Blaw-Knox furnishes rolls for rolling mills in both iron and steel alloys for ferrous and non-ferrous metals, formulated and machined to the most exacting specifications for individual mills.



COMPLETE PROCESS PLANTS
Blaw-Knox engineers and technologists covering every major engineering field, and Blaw-Knox construction forces have an enviable reputation earned in building many of the newest and largest process plants in recent years—complete from process determination to commercial operation.

PROCESS EQUIPMENT
The design and fabrication of unusual and outstanding process equipment for modern industries, is a major Blaw-Knox activity.

OPEN STEEL FLOORING
Blaw-Knox grating for floors and stairs in factories, power plants, and similar uses, is famous for its safety, durability and easy maintenance.

INDUSTRIAL BUILDINGS
Blaw-Knox steel industrial buildings are quickly and easily erected, of permanent construction, inexpensive to maintain, and can be given insulation and exterior or interior treatment to fit the needs of the owner.

BLAW-KNOX COMPANY
PITTSBURGH, PENNSYLVANIA, U.S.A.

ADDRESS . . . EXPORT DEPARTMENT
SECTION 2047 CANADIAN PACIFIC BLDG., 342 MADISON AVENUE
NEW YORK 17, N. Y. • Cable Address: Blawknox, N. Y.

STEEL THAT STAYS ON THE JOB

Ask the drill runner. Or the sharpener operator. Anybody who knows hard-rock drilling can tell you Bethlehem Hollow is tough and fatigue-resisting, a top-quality steel that stays on the job.

All the Features You Need

- ★ Ideal for either forged or detachable bits
- ★ Smooth center hole minimizes fatigue-failure
- ★ Wide quenching-range for easy heat-treating
- ★ Controlled hardenability for top performance
- ★ Rigidly inspected for quality and uniformity

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by
Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation

★ BETHLEHEM STEEL ★

BETHLEHEM HOLLOW DRILL STEEL

GREATER SAVINGS

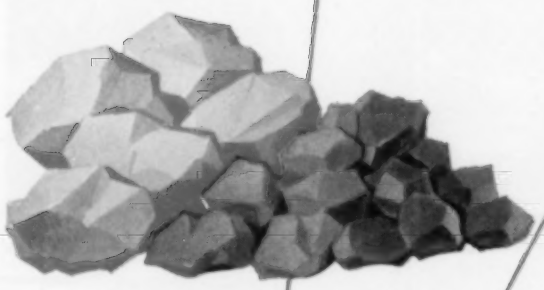

BETTER BREAKAGE

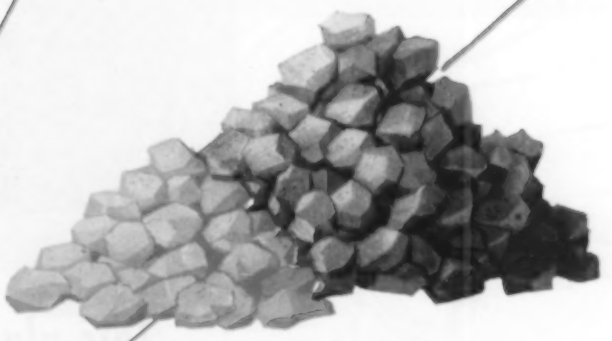

MORE PRODUCTION

FOR LOWER BLASTING COSTS

You can save three ways by replacing older-type explosives with "Gelamites" and "Hercomites." These Hercules explosives give better breakage, greater production, and are more economical to use than extra dynamites and gelatins. Both "Hercomites" and "Gelamites" come in handy "Tamptite" cartridges. For further information, write for our illustrated booklet "Hercomites and Gelamites for Lower Blasting Costs."

HERCULES POWDER COMPANY
INCORPORATED
932 King Street, Wilmington 99, Delaware

"GELAMITE," "HERCOMITE" AND "TAMPTITE" ARE REG. U. S. PAT. OFF.

XR50-6

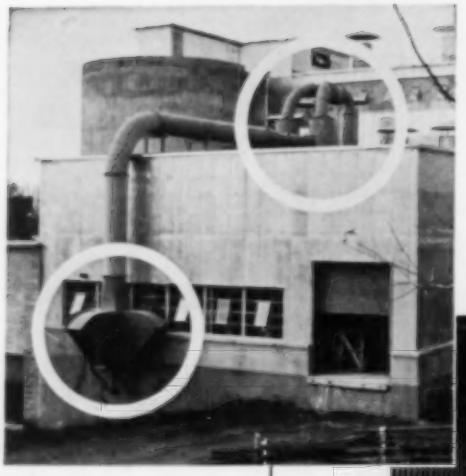

AAF Filters "team up" on Talc Dust

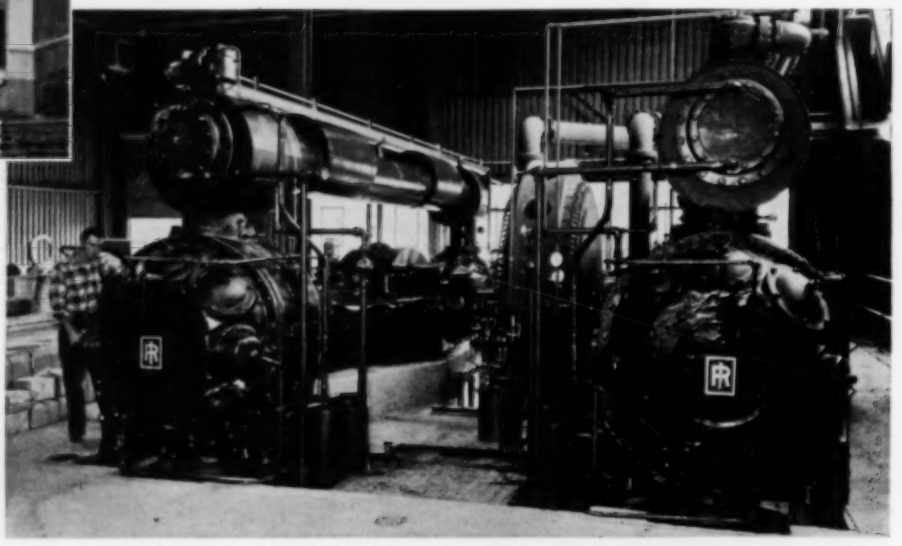

Talc plant compressor given perfect protection against sub-micron dust particles

THIS huge Ingersoll-Rand PRE compressor supplies the compressed air for operating 14 grinding mills at the new plant of the Gouverneur Talc Company. Converting talc ore to sub-micron size means fine dust and plenty of it—certainly not a healthy diet for compressor operation.

But everything is under control. Air entering the compressor intake first passes through a series of AAF dry-type filters for the initial cleaning. Next, it runs the gantlet of two AAF Cycoil* Oil Bath Air Cleaners which remove any remaining trace of talc or other dirt. Final result—super-clean air for compressor operation.

Whatever your dust problem, there's one or a combination of filters in AAF's complete line that can solve it effectively and economically. Get the facts now! Call your nearby AAF representative or write direct for complete product information.

AMERICAN AIR FILTER COMPANY, INC.
402 Central Avenue, Louisville 8, Ky.
In Canada: Darling Bros., Ltd., Montreal, P. Q.

AAF

AIR FILTERS
AND DUST CONTROL EQUIPMENT

** Trade mark registered U. S. Patent Office*

HANSEN COUPLINGS

GIVE YOU 2 Big Advantages

1. QUICK CONNECTION AND DISCONNECTION

2. INSTANT AUTOMATIC FLOW OR SHUT-OFF

WRITE FOR CATALOG

QUICK-CONNECTIVE COUPLINGS for AIR
ACETYLENE • OIL • GREASES • GASES
VACUUM • STEAM • OXYGEN • HYDRAULIC

REPRESENTATIVES

BALTIMORE • CHICAGO • CLEVELAND
DALLAS • DAYTON • DENVER • DETROIT
FT. WAYNE • HARTFORD • LOS ANGELES
MILWAUKEE • MINNEAPOLIS • NASHVILLE
SAN FRANCISCO • SEATTLE • ST. LOUIS
MONTREAL • TORONTO
Export Dept.: Cleveland

With Hansen couplings you save precious minutes every time you connect or disconnect a fluid line carrying gas, liquid or grease.

To connect, you merely push plug into socket—flow starts instantly. To disconnect, pull back sleeve on socket, coupling disconnects. Flow is shut off instantly and automatically.

From a wide range of available sizes and types, you can select a Hansen coupling exactly suitable for your application—each type engineered to meet its specific requirements.

QUICK CONNECTIVE FLUID LINE COUPLINGS...

THE HANSEN MANUFACTURING COMPANY

4031 WEST 150th STREET • CLEVELAND 11, OHIO

How much should a valve cost?

Only as much as is necessary for it to meet all the conditions under which it must operate.

When the service in which a valve is to be used requires special design and materials, it is poor economy to try to make an inexpensive valve do the job. "Down time", maintenance costs, if not actual valve failure, will far more than offset any initial saving.

On the other hand, in a majority of services, standard Powell Valves satisfy all requirements for long, trouble-free performance.

And, because Powell makes all kinds*, it is the soundest economy to standardize on Powell Valves for all your flow control requirements.

Fig. 95—Bronze Dash Pot Check Valve for 200 pounds air working pressure. Designed for air compressor service. Has screwed ends, screwed-on cap and regrindable, renewable, wear-resisting bronze disc. Cushioning effect of plunger in dash pot makes seating of disc practically noiseless.

Fig. 1793 — Large 125-pound Iron Body Bronze Mounted Gate Valve. Sizes 2" to 30", incl. Has outside screw rising stem, bolted flanged yoke and tapered solid wedge.



Fig. 1708 — 200-pound Bronze Globe Valve with screwed ends, union bonnet, renewable heat treated stainless steel seat and regrindable, renewable, wear-resisting "Powell-ium" nickel-bronze disc.

Fig. 158—150-pound Bronze Horizontal Lift Check Valve with screwed ends, screwed-on cap and renewable vulcanized composition disc.

Fig. 241 — Large 125-pound Iron Body Bronze Mounted Globe Valve. Made in sizes 2" to 16", incl. Has outside screw rising stem, bolted flanged yoke and regrindable, renewable bronze seat and disc.

***The Complete Powell Line includes Globe, Angle, Gate, Check, Relief and Flush Bottom Tank Valves in Bronze, Iron, Steel and a wide range of Corrosion-Resisting metals and alloys.**

Ask your nearest Distributor—or write direct

The Wm. Powell Co., Cincinnati 22, Ohio

DISTRIBUTORS AND STOCKS IN ALL PRINCIPAL CITIES

POWELL VALVES

2 ways to Better Air Service

GOODYEAR INDUSTRIAL RUBBER PRODUCTS
G.T.M.-Specified EMERALD CORD AIR HOSE for
ALL HEAVY-DUTY TYPES OF AIR SERVICE
A—Super-tough, non-gouging green cover
B—Reinforcement of high-strength cord impregnated with "Adhezo" for greatest strength, best adhesion, reduced wall gauge
C—Non-porous, seamless, oil-resistant, non-flaking tube
A
B
C
Emerald Cord Air Hose is made with one, two or three braids depending on severity of service—is the finest air hose available anywhere.
GOODYEAR INDUSTRIAL RUBBER PRODUCTS
G.T.M.-Specified REDWING-H CORD AIR HOSE for
MINES, QUARRIES, CONSTRUCTION JOBS
(direct connection to compressors, etc.)
A—Rugged red cover of "cushiony" rubber stock
B—Rayon cord braids for strength and resistance to shock blows
C—Non-porous, seamless, oil-resistant tube will not flake
A
B
C
FOR HOSE, FLAT BELTS, V-BELTS, MOLDED GOODS, PACKING, TANK LINING built to the world's highest standard of quality, phone your nearest Goodyear Industrial Rubber Products Distributor.

For the best service at the lowest cost in the long run, ask the G.T.M.—Goodyear Technical Man—for either of these pace-setting hoses. Emerald Cord is the finest air hose made—Redwing-H Cord gives high quality at a lower price. To consult the G.T.M., phone your nearest Goodyear Distributor, or write Goodyear, Akron 16, Ohio.

Emerald Cord, Redwing—T.M.'s The Goodyear Tire & Rubber Company

GOODYEAR

THE GREATEST NAME IN RUBBER

We think you'll like "THE GREATEST STORY EVER TOLD"—Every Sunday—ABC Network

Rewarding work!

NI-ROD saves iron castings...makes *machinable* welds

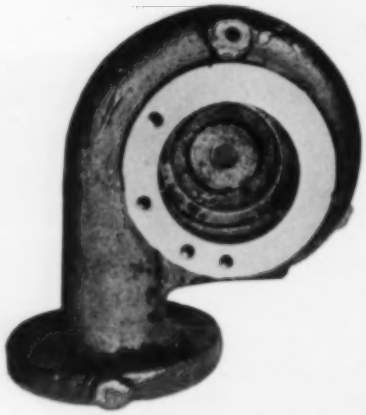

But for Ni-Rod electrodes, this pump body would have been scrapped at the foundry. The built-up area of the flange facing is almost indistinguishable from the original cast iron. Machining, drilling and tapping of the Ni-Rod weld deposit were no more difficult than similar operations in cast iron.

In the photograph above, you see a 45-pound gray iron pump casing that was rejected because a small area of the flange failed to fill during pouring.

Instead of being scrapped, the casting was sent to the plant's welding department. There, with Ni-Rod® electrodes, the defective flange was built up and the repaired casting was passed to the machine shop where it was finished like a regular production piece.

Salvage operations like this with Ni-Rod save time and money.

Ni-Rod gives fast, crack-free, non-porous welds that are a close color match for gray iron . . . and welds that are as *machinable* as the iron itself. Slag removal is easy. And Ni-Rod is stable-arcing in all positions with either AC or DC current.

Another important Ni-Rod feature . . . preheating or post-heating is seldom necessary.

Why not try Ni-Rod in your own shop . . . soon? Discover for yourself why *4 out of 5 shops* re-order Ni-Rod, once they've tried it.

Your nearest INCO distributor stocks Ni-Rod in 3/32″, 1/8″, 5/32″, and 3/16″ diameters.

FREE – 8-page booklet:
"NI-ROD . . . a new electrode for any cast iron welding."

THE INTERNATIONAL NICKEL COMPANY, INC.
67 Wall Street, New York 5, N. Y.

For welds you've never been able to make before . . . in high-phosphorus irons; heavy sections—

NI-ROD "55"

EMBLEM OF SERVICE
INCO NI-ROD TRADE MARK

NI-ROD DISTRIBUTORS

Alloy Metal Sales, Ltd.
Robert W. Bartram, Ltd.
Eagle Metals Company
Metal Goods Corporation
J. M. Tull Metal & Supply Company
Pacific Metals Company, Ltd.
Steel Sales Corporation
Whitehead Metal Products Company, Inc.
Wilkinson Company, Ltd.
Williams and Company

Metal & Thermit Corporation **National Cylinder Gas Company** **Hollup Corporation**

BUT...
Electrically
they may be all special
... and all DIFFERENT

Many different electrical characteristics can be supplied in the same mechanical enclosures — viz.:

Zero speed stalled torque ... *Triple horsepower*... Multiple torque ... *Matched speed* ... Rapid reversing ... *Plugging duty* ... Regenerative braking ... *Controlled torque* ... Multi-speed ... *Synchronous induction* ... Special high efficiencies ... *Special power factor* ... Low or high starting torque ... *Low or high pullout torque* ... Special low starting current ... *Low temperature rise* ... Special insulation ... *Single, 2 or 3 phase* ... High and non-standard voltages ... *High and non-standard frequencies* ... And countless other variations and combinations.

For almost half a century we have been designing and building motors especially suited to the exacting requirements of industry. If you have an electric motor problem, consult our nearest office.

★

THE LOUIS ALLIS CO.
MILWAUKEE 7, WISCONSIN

...how good can a valve be?

...THIS ONE HAS OPERATED 10,000,000 TIMES WITHOUT APPRECIABLE WEAR!

Hanna unitite Valves

YOU want a valve you can *depend* upon to operate faithfully day after day, month after month, year after year—without repacking . . . without adjustment . . . with nothing more than lubrication.

A running test under normal operating conditions shows that a Hanna Unitite Valve is still "going strong" after *10 million cycles of operation*, and should be good for *another 10 million*. Based on eight cycles per minute for an eight-hour day, this would represent 20 years of care-free service!

This is not surprising, for Hanna Unitite Valves are made of superior quality materials and parts. They are packless and permanently tight, protected from dust and abrasive matter by a Neoprene cap, and operate with a patented disc movement.

Unitites are designed for 3-way or 4-way operation, for air, oil or water, up to 250 psi. in three mounting styles. The Hanna Valve Catalog gives full details.

Send for Catalog

New Valve Catalog 251 gives features and specifications on the complete line of Hanna Valves.



Hanna Engineering Works

HYDRAULIC AND PNEUMATIC EQUIPMENT . . . CYLINDERS . . . VALVES . . . RIVETERS

1765 Elston Avenue, Chicago 22, Illinois

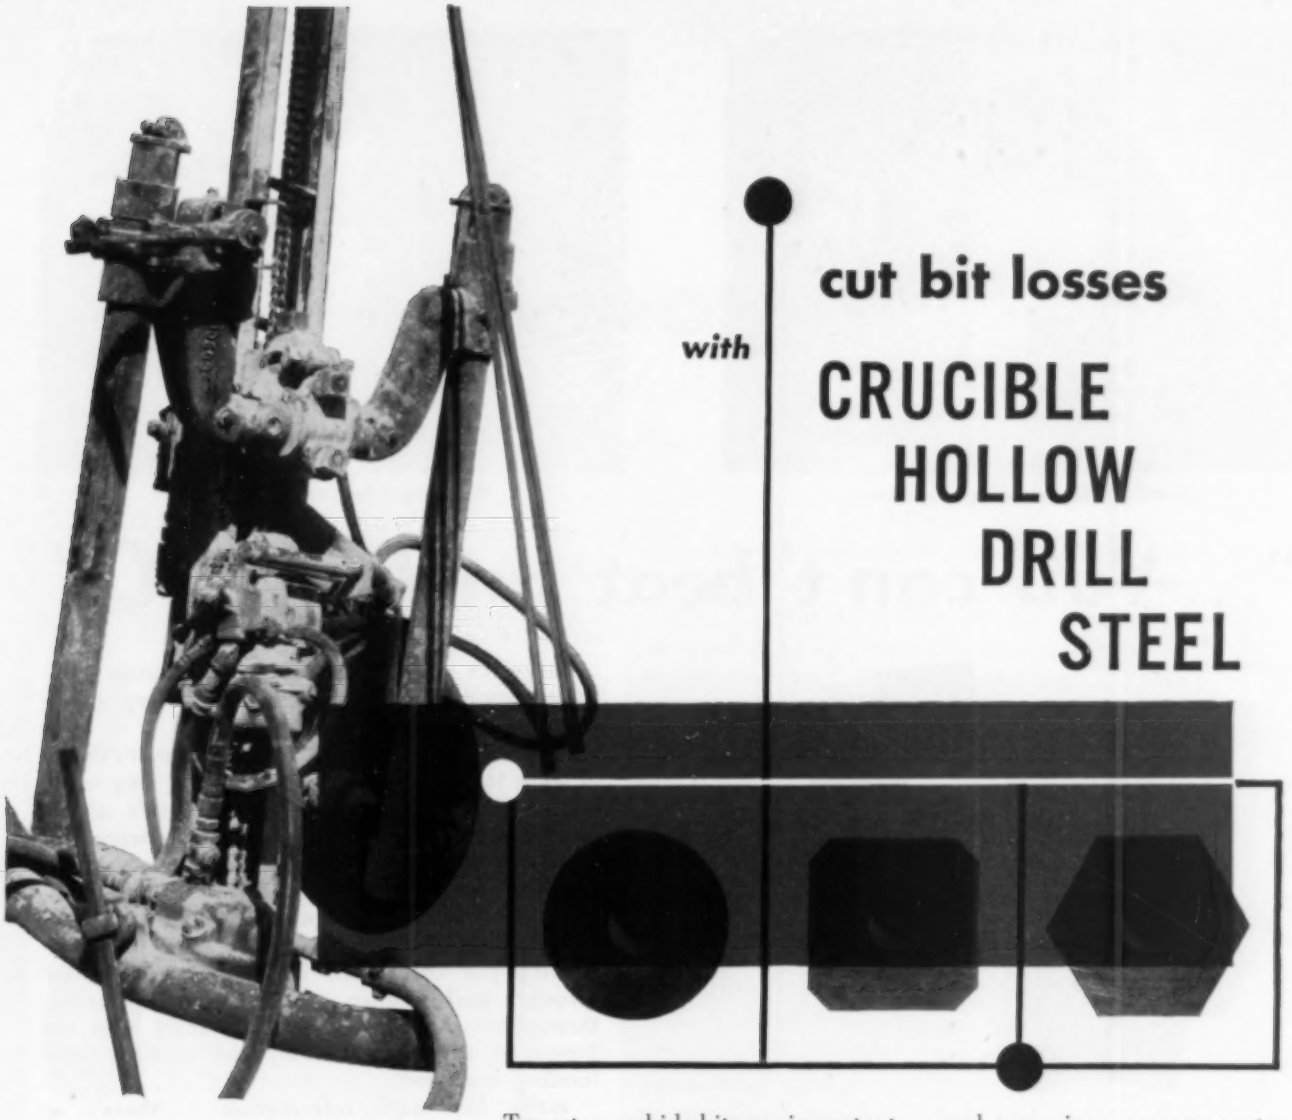

cut bit losses *with* CRUCIBLE HOLLOW DRILL STEEL

Tungsten carbide bits are important . . . and expensive . . . components of modern rock-drilling rigs. When Crucible Hollow Drill Steel drives these rock-biting "teeth", you needn't fear breakage that will leave an expensive bit in the hole. That's because Crucible Hollow Drill Steel is the result of controlled hardenability, perfection of stress-bearing surfaces and uniform processing.

Pretested Crucible Hollow Drill Steel is setting drilling records in mines, quarries . . . roads and tunnels. These records of performance plus fast field service, alert metallurgical advice, and country-wide stocks are the reasons why so many drill steel users are saying, *"Give me* CRUCIBLE *every time!"* CRUCIBLE STEEL COMPANY OF AMERICA, Chrysler Building, New York 17, N. Y.

CRUCIBLE first name in special purpose steels

HOLLOW DRILL STEEL

HIGH SPEED • TOOL • STAINLESS • ALLOY • MACHINERY • SPECIAL PURPOSE • STEELS

Model 12B Eimco in mine in California

Model 12B in Lead mine in California

"...You can't beat an *EIMCO*"

To help you help yourself — Eimco offers three bulletins: on drawholes, L1017; on wide headings, L1018; and on tunnels, L1005A. They're available to bonafide mining men. Drop us a card today.

That's the way Eimco RockerShovel users talk —from the machine operators all the way up to Superintendents.

When you put a shovel underground, it's there to work for you. The men must use it—they must like it—it must be dependable! Eimco's alone meet these requirements. They stay underground longer—that's proven by their much lower maintenance costs. The men like them and use them because they're easier and safer to operate, stronger for lifting heavy muck, and faster in loading the cars. Yes, it's a fact established through performance in every mining camp throughout the world . . . You can't beat an Eimco; it is unquestionably the number one loading machine!

Write for more information — there's a RockerShovel to fit your loading needs. .

EIMCO

THE EIMCO CORPORATION

The World's Largest Manufacturers of Underground Rock Loading Machines

EXECUTIVE OFFICES AND FACTORIES — SALT LAKE CITY 8, UTAH, U. S. A.

BRANCHES: NEW YORK, CHICAGO, BIRMINGHAM, EL PASO, BERKELEY, DULUTH

AFFILIATED COMPANIES: SOCIETE EIMCO, PARIS, FRANCE

EIMCO (GREAT BRITAIN) LTD., LEEDS 12, ENGLAND

AGENTS IN ALL PRINCIPAL CITIES THROUGHOUT THE WORLD

Model 21 in Copper mine in Arizona

Model 12B in Lead Silver mine in Utah

A232

YOU CAN BE **SURE**.. IF IT'S
Westinghouse

FOR AIR HANDLING

Is your motor *really* dripproof?

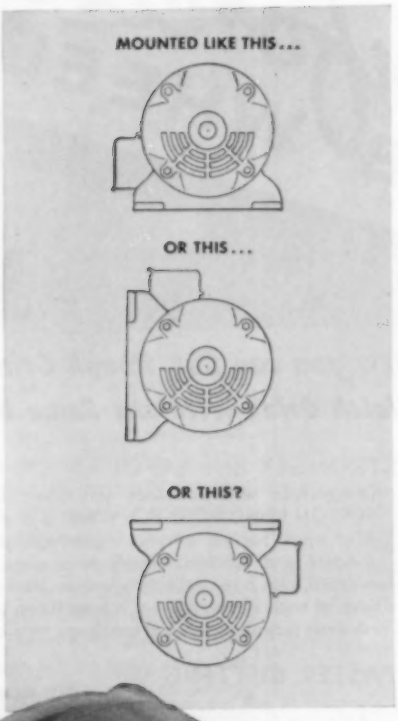

. . . AT ANY ANGLE OF MOUNTING— Do you see a ventilating opening in the frame? Then the motor is probably not dripproof when side wall or ceiling mounted. You need a special motor for these mounting positions . . . with special protection over frame openings. But . . .

You can save the costs of specials with Life-Line motors. Solid frame construction eliminates frame openings. All ventilation is accomplished through the end brackets. Simply rotate the 4-position brackets and the Life-Line is dripproof—for side wall or ceiling mounting.

Dripproof conduit box can be rotated also. Plenty of knockouts give maximum possible connections. And, because a Life-Line motor needs no further lubrication, you can crowd it into cramped quarters . . . mount it in "hard-to-get-at" locations—and forget it. Thus, you get maximum mounting flexibility for difficult mounting problems.

It costs no more to get these "special" features in a standard motor. Simply specify Life-Line as the drive for your equipment. Ask your local Westinghouse representative for details and a copy of booklet B-3842, or write Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-21583

If you figure LIFE-COSTS . . . you'll figure LIFE-LINE

Westinghouse
Life-Line
Motors
INDUSTRY'S LEADING MOTOR

It Cuts . . It Smooths . .

Now you can Cut, Rough Grind and Finish Grind with the Same Wheel!

STRONGER and SAFER

Comparison will convince you that the new NORTON REINFORCED Hub Wheel is a stronger, safer wheel for use on your right-angle portable grinders and sanders. Layers of strong, fibrous material, plus a special safety web molded into the back of each wheel, prevent it from flying apart in use even though accidental breakage should occur.

FASTER CUTTING

Comparison will convince you that this new Norton wheel cuts as fast, and often faster than other wheels of similar type. It cuts fast and clean without spalling and loading, because it contains sharp, durable ALUNDUM abrasive, a special resinoid bond and has a unique file-like cutting surface.

LONGER LIFE

Comparison will convince you that you get longer, more economical life with a NORTON REINFORCED Hub Wheel — the strongest, most durable wheel of its type on the market. Many plants have discovered that this wheel lasts two to three times longer than wheels used previously.

VERSATILE

And comparison will prove to you that this wheel is really versatile. Now you can rough and finish grind with the same wheel — ***and you can notch with it too!***

NORTON
ABRASIVES

NORTON COMPANY, WORCESTER 6, MASS. · Warehouses in Five Cities · Distributors in All Principal Cities

ON THE COVER

AS PART of an expansion and modernization program, National Tube Company has put into use at its Lorain, Ohio, works four new Bessemer converters that are notable because they are the first of these pneumatic steelmakers of all-welded construction. Using molten blast-furnace iron as raw material, each produces 25 tons of steel in less than twenty minutes. With the aid of a special deoxidizing process developed by the company, an excellent grade of steel for pipe is turned out.

Apart from this, there is increasing evidence that the pioneer Bessemer process, which was threatened with extinction when the open-hearth furnace came into service half a century ago, is not only holding its own but is even improving its position. Research initiated by Jones & Laughlin Steel Corporation, and later taken up by United States Steel Corporation, has given rise to a new steelmaking technique called turbo-hearth that combines the best features of the Bessemer and open-hearth methods. With it, steel of open-hearth quality, which means low nitrogen, phosphorus, and sulphur content, has been produced in twelve minutes.

Following initial J & L experiments with small vessels, U. S. Steel conducted tests with a 30-ton unit that is described as shaped somewhat like a giant coffee maker. Inside the steel casing is a lining of magnesite bricks that can withstand temperatures exceeding 3000°F. Like the Bessemer converter, the turbo-hearth is suspended on trunnions to permit tilting. The Bessemer principle of supplying fuel in the form of compressed air is followed, but the jets are placed so as to provide for surface blowing of the molten-iron charge instead of pushing the air through it from the bottom, as in the Bessemer. Enough oxygen is made available to burn all the carbon to carbon dioxide inside the vessel, whereas in the ordinary converter it is burned only to carbon monoxide. The resultant greater heat does a quicker, better refining job.

U. S. Steel reports that, when using standard basic pig iron as the charge, the turbo-hearth yields steel containing a minimum of undesirable elements. Exhaustive experiments have indicated that it equals open-hearth steel of similar composition. Just as important is the fact that the new method is fast yet flexible. The output of one 30-ton turbo-hearth exceeds that of a 225-ton standard open-hearth furnace. Many or few vessels can be utilized, depending upon the demand for steel. Fast as it is, the process can be still further speeded up by adding oxygen to the air blast.

Commercial turbo-hearth production of steel is not here yet, but it is not far away. Meanwhile, agreements are being reached on the patents relating to it.

Compressed Air Magazine

COPYRIGHT 1950 BY COMPRESSED AIR MAGAZINE COMPANY

VOLUME 55 **April, 1950** NUMBER 4

G. W. MORRISON, *Publisher*
C. H. VIVIAN, *Editor* J. W. YOUNG, *Director of Advertising*
ANNA M. HOFFMANN, *Associate Editor* J. J. KATARBA, *Advertising Mgr.*
A. W. LOOMIS, *Assistant Editor* JOSEPH C. DILTS, *Advertising Sales*
WALTER P. GILLINGHAM, *Assistant Editor*
D. Y. MARSHALL, *Europe*, 243 Upper Thames St., London, E. C. 4.
F. A. MCLEAN, *Canada*, New Birks Building, Montreal, Quebec.

EDITORIAL CONTENTS

Red, Green, and Black Zinc Ore—*Walter P. Gillingham* 88
Air Power on American Submarines—*Howard S. Dewey* 95
Keeping the Gas Flowing—*C. H. Vivian* 100
Flying Under Pressure 105
New Compressor Presents Innovations in Design 106
This and That 107
Editorials—Our Periodical Purge—Robot Compressor Stations 108
Coke Bed Fired Quickly with Electropneumatic Lighter 109
Air-Operated Machine Glues and Seals Cartons 109
Special Jackhamer Mounting for Road-Widening Job 109
Industrial Notes 110
New Books and Industrial Literature 113

ADVERTISING INDEX

Adams Co., Inc., R. P. 36
Allis, Louis, Company, The 13
American Air Filter Co., Inc. 8
Anaconda Wire & Cable Co. 37
Armstrong Machine Works 40
Bethlehem Steel Company 6
Blaw-Knox Company 5
Bucyrus-Erie Company 31
Canadian Ingersoll-Rand Co., Ltd. 24
Compressed Air Magazine Co. 41
Cook Mfg. Co., Inc., C. Lee 26
Coppus Engineering Co. 33
Crane Company 32
Crucible Steel Company of America 15
Cuno Engineering Corporation 23
Danielson Safety Valves, Inc. 40
Dayton Rubber Company, The 42
Dollinger Corporation 3
Donaldson Company, Inc. 41
Eimco Corporation, The 16
Garlock Packing Co., The 40
Goodyear Tire & Rubber Co., The 11
Hanna Engineering Works 14
Hansen Mfg. Co., The 9
Hercules Powder Company 7
Industrial Clutch Company 38
Ingersoll-Rand Company 4, 28, 35, 3rd Cover
International Nickel Co., Inc., The 12
Madison-Kipp Corporation 34
Maxim Silencer Co., The 41
National Forge & Ordnance Co. 29
Naylor Pipe Company 21
New Jersey Meter Company 19
Norton Company 18
Powell Company, The Wm. 10
Roebling's Sons Co., J. A. 27
SKF Industries, Inc. 25
Texas Company, The ..... 2nd Cover
Timken Roller Bearing Company, The Back Cover
Victaulic Company of America 22
Vogt Machine Company, Henry 30
Walworth Company 39
Waukesha Motor Company 20
Westinghouse Electric Corporation 17

A monthly publication devoted to the many fields of endeavor in which compressed air serves useful purposes. Founded in 1896.

CCA Member Controlled Circulation Audit

Published by Compressed Air Magazine Co., G. W. MORRISON, *President;* C. H. VIVIAN, *Vice-President;* J. W. YOUNG, *Secretary-Treasurer.*
Business, editorial, and publication offices, Phillipsburg, N. J.
Advertising Office, 11 Broadway, New York 4, N. Y., L. H. GEYER, *Representative.*
Annual subscription: U.S., $3.00; foreign, $3.50. Single copies, 35 cents.
COMPRESSED AIR MAGAZINE is on file in many libraries and is indexed in Industrial Arts Index and in Engineering Index.

Red, Green, and Black Zinc Ore

Two Deposits in Northern New Jersey Yield a Type of Ore that Is Found Nowhere Else

Walter P. Gillingham

MINING, 1870 STYLE

An open pit in the Mine Hill ore body at Franklin as it looked 80 years ago. The dark objects in line along the base of the light-colored cliff are workmen engaged in breaking the ore by hand and shoveling it into horse-drawn wagons, two of which are shown at the bottom of the picture. The Sterling Hill property was worked in a similar manner.

EARLY VIEWS

The town of Franklin was originally called Franklin Furnace because in Revolutionary War days it was the site of a furnace to which the district's iron ores were brought for smelting. It was organized as a borough in 1913 and given its present name. The view at the top was taken in 1904 from a hill about 1½ miles southeast of the community. The open pits by which the deposit was once worked are located just right of the main cluster of buildings. The lower picture shows the Sterling Hill Mine at Ogdensburg, about 3 miles south of Franklin, as it appeared in 1915. It also carries the scars of open cuts made by early-day miners.

IT IS night in the city of Newark, N. J. Inside a house on a quiet residential street a man sits at a table before a crackling fire. The yellow glare of a flickering candle casts a dim light in the room. From the street come the muffled sounds of a horse's hoofs and the rattle of carriage wheels. The man pulls his chair closer to the table and begins to write to the editor of the *Philadelphia Inquirer:*

December 10, 1849

MR. EDITOR—

Some of those who sneer at the good State of New Jersey and consider her nothing but a sand flat, producing peas and watermelons, should take the jaunt, from which I have just returned, to the mountains of Sussex county, and there see the mineral riches . . . the extent of which, were they fully set forth, would be deemed almost fabulous . . . .

My object was to examine the mines of the Sussex Zinc Companies, which have recently excited so much attention; and in company with a party of friends . . . proceeded on to Franklin, the seat of the mines.

The first mine we visited is called Sterling Hill; the vein of red oxide which crops out on its side is about six feet thick, and descends almost perpendicularly, growing thicker as it descends . . . (it) is estimated by geologists to be about two thousand feet in depth . . . about six hundred feet in width . . . . In fact, there is ore enough in this one mine, even with immense consumption, to last for several generations . . . .

We next visited the other mine of the Company, called Mine Hill . . . and there saw even more startling developments of mineral resources, the vein being of great thickness and standing almost like a wall on the side of a hill, upwards of two hundred feet high. It can be mined at an expense almost trivial . . . . The Red Oxide of Zinc is found in no other part of the known world. . . the richest ores of Zinc ever discovered.

We visited . . . the trial furnace erected by the Companies, at Newark, for reducing the red oxide of zinc . . . (which) has heretofore never been productively worked . . . and from the results which we saw obtained, I feel confident they will be able to compete with the world in the manufacture of zinc, either as a metal in its various forms, or as a paint, with profit to themselves and benefit to the country, inasmuch as all zinc now used is imported.

Yours truly,
A JERSEYMAN

The writer of this letter did not pen it in the interests of interstate bickering. He had just seen two zinc deposits whose size, richness, and type of mineralization had impressed him greatly. And, more clearly than many of his period he foresaw the tremendous impact they were to make on the economy of his growing country. The ore bodies so enthusiastically described more than 100 years ago

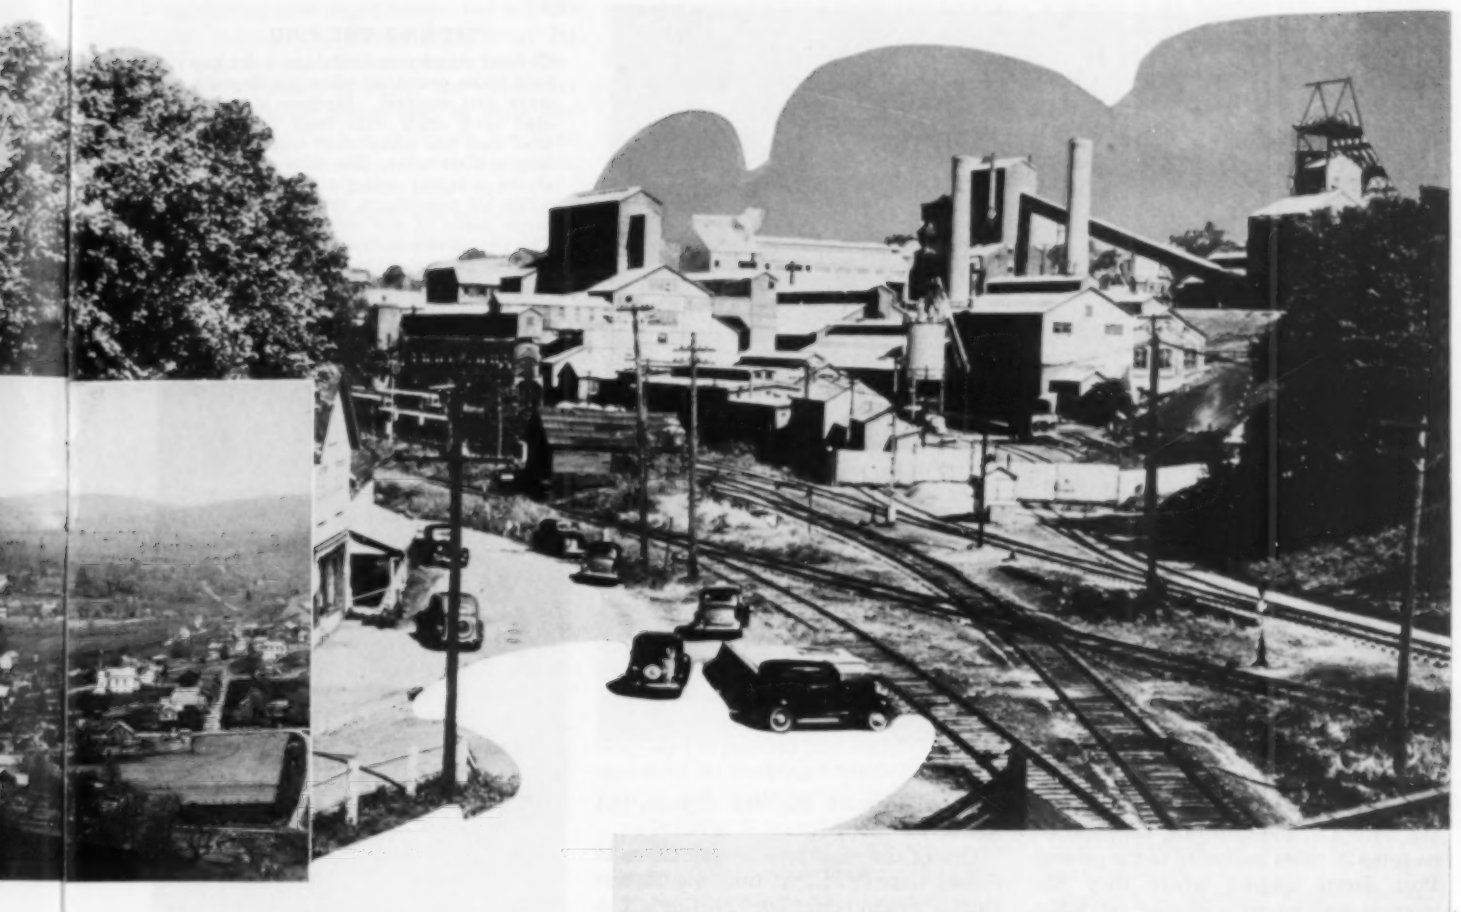

FRANKLIN AND STERLING HILL MINES TODAY

Modern surface plants at both properties receive the ore as it is hoisted and separate its mineral components, which are then sent to the company smelter at Palmerton, Pa., for extraction of the metal. The views show the mine and mill at Franklin (top) and the surface plant at the Sterling Hill property.

are located in northern New Jersey, within two hours' drive from New York City. Now known as the Franklin and Sterling Hill mines, they are owned and operated by The New Jersey Zinc Company. Together they form one of the largest sources of zinc in the country and make the region the nation's third largest in the production of zinc ore.

The unusual thing about the deposits is their unique mineralization. Where most zinc minerals exist as sulphides, they are made up of oxides and silicates. Where most of them are dull black or pale amber in color, they are black, green, and red, combined with other varicolored metallic substances. Where most zinc ore bodies are of fairly uniform composition, they are an intimate mixture of a large number of minerals. Where most of them carry minor amounts of lead, cadmium, copper, etc., they are free of these metals.

The three important minerals in the ore are franklinite, zincite, and willemite. Franklinite, a complex oxide of zinc, iron, and manganese, is jet black in color; zincite, the oxide of zinc, is red; and willemite, the silicate, is green. These three occur as small crystals that are jumbled together in every conceivable combination to make up the deposits. They also contain a bewildering array of other minerals—more than 130 different ones having been identified. For this reason the area has been called the mecca of mineralogists. But for the same reason they resisted for 200 years every attempt to apply them commercially.

The history of the ore bodies goes back to the early days of our nation. In 1609, Henry Hudson sailed the *Half Moon* into New York Bay and up the river that now bears his name. A few years later the Dutch began sending trading expeditions to the new land. They established the colony of Nieuw Amsterdam (New York), from which they invaded New Jersey to barter with the Indians. They were also interested in minerals, and records of that period indicate that their scouting parties found and explored some massive outcrops located 50 miles northwest of New York—the Mine Hill and Sterling Hill deposits, as they were

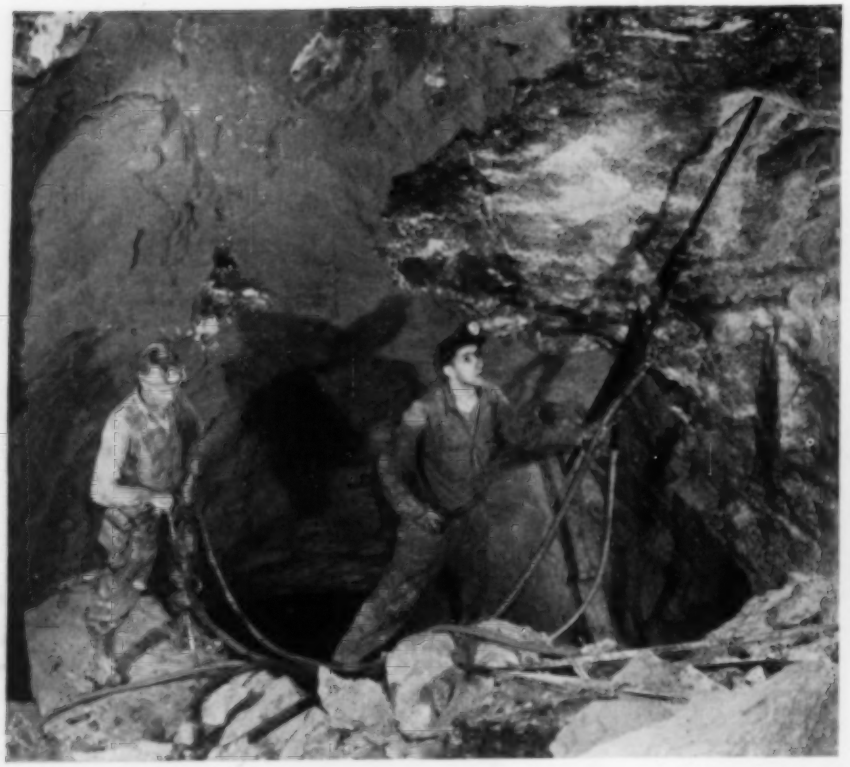

MINING THE ORE

Current mining methods are a far cry from those practiced when the deposits were first worked. Modern air-operated rock drills with their improved steel and bits make short work of putting in blast holes. The view at the left shows a miner using a stoper (right) while his companion drills a hole in a large piece of ore with a Jackhamer. The two miners below are loading broken ore from a chute into cars that will transport it to a shaft hoisting station.

originally called. Unable to determine the nature of the minerals, they moved on some 20 miles westward to the present Port Jervis district where they discovered and mined a copper ore body. An old road built by those men to haul the ore to Kingston, N. Y., is still partly preserved.

In June, 1664, the Duke of York, with a few strokes of his quill, created and granted the region between the Hudson and Delaware rivers to John Berkeley and Sir John Carteret. In 1676 the land, called *Nova Caesrea* (New Jersey), was divided, Carteret taking the easterly section and Berkeley the western. In 1680, William Penn and eleven associates purchased the Province of East Jersey for 3400 pounds at public auction. This area, in which the Mine Hill and Sterling Hill deposits are located, was divided and subdivided down through the succeeding years as parts of it were sold or passed from father to son.

The Sterling Hill ore body got its name from William Alexander, the Earl of Stirling. An English nobleman by birth, he came to America in 1760 to take over a large New Jersey estate he had inherited from his father. The land included several iron mines and the zinc deposit. Despite his origin, Lord Stirling sympathized with the colonists in the War of Independence. He joined Washington's army and rose to the rank of major general, distinguishing himself at the battles of Long Island, Trenton, Brandywine, and Monmouth. From the iron mines on his property he produced metal for molding cannon sorely needed by the Continental Army. He also attempted to work the zinc deposit, but failed.

One of the most prominent citizens of Sussex County at that time was Robert Ogden, a neighbor of Lord Stirling's. The former built a mansion near the present town of Ogdensburg, which was named for him. One of his sons, Elias, bought the tract close to Ogdensburg which contains the Sterling Hill ore body but did little towards developing the latter. Probably the first man to realize the value of Mine Hill was Joseph Sharp, whose father willed him the farm on which it was located. Unfortunately, he and others of that period, probably misled by the strong resemblance between the predominating black franklinite in the ore and the black magnetite so plentiful in Sussex County, thought that Mine Hill was an iron deposit. Although he spent much time and effort trying to produce iron, he never succeeded, and finally had to dispose of the property to satisfy his creditors.

Joseph Sharp was not destined to be the only one to lose the mineral wealth he possessed. Others after him spent years and great sums of money in vain attempts to solve the perplexing nature of the ores. In 1810 the lands with both mines passed into the hands of Dr. Samuel Fowler, a son-in-law of Robert Ogden. Doctor Fowler appreciated their potential value, but he did not know what the ore was or how to utilize it. He, too, thought it was iron, but when he tried to smelt it he failed. He was in the position of a man who has a million dollars in a safe but can't find the combination to unlock it. At that time, most of the information about mining and smelting available in this country had come from Europe, where the industry had been carried on for centuries. But the best of her experts in that field were unfamiliar with the true character of the ores because none like them had ever been discovered before.

The obstacles which confronted Doctor Fowler in his efforts to exploit the deposits were enormous. In order to obtain metal from the ore, he had to smelt it in a furnace. Yet he could not fuse a piece of ore made up of zinc, iron, manganese, and other elements, each requiring a different degree of heat for reduction. Added to those difficulties was a lack of understanding of the structure and composition of the ore bodies. Because some of the veins or ore shoots were composed of one or another of the principal minerals, uncontaminated by the others, it was believed that that condition persisted, and early mining was done under that misconception. Years later it was proved that these "stringers" constitute only a small part of the deposits and that the main mass consists of an admixture of all three minerals.

During most of his active life, Doctor Fowler exerted every effort to find some practical application for his ores and to put the mines on a paying basis. He

made countless experiments, and in 1830 did succeed in doing one thing: he ground some of the zinc oxide and produced a "bluish-white powder" which he substituted for white lead in paint for his house. That is probably the first time zinc oxide from American-mined ores was used for house painting.

While Doctor Fowler was serving as a member of the House of Representatives Congress passed a law authorizing the making of a set of standard weights and measures for use in the Government's custom houses. "New Jersey Red Oxyde of Zinc" was alloyed with copper to make the brass for those weights. The ore came from the "Weights and Measures" opening of the Mine Hill, and its smelting at the Washington arsenal in 1838 marked the first commercial production of zinc metal in the United States.

Doctor Fowler did not live to see the culmination of his work. Because of his failing health he disposed of the properties in 1836, a few years before his death. Later, his son Col. Samuel Fowler acquired title to the deposits. Instead of trying to operate them single-handed, as had his father, he brought together a group of experts whose talents would stand a better chance of mastering the complex ores. In 1848 those men formed The Sussex Zinc & Copper Mining & Manufacturing Company, predecessor of The New Jersey Zinc Company.

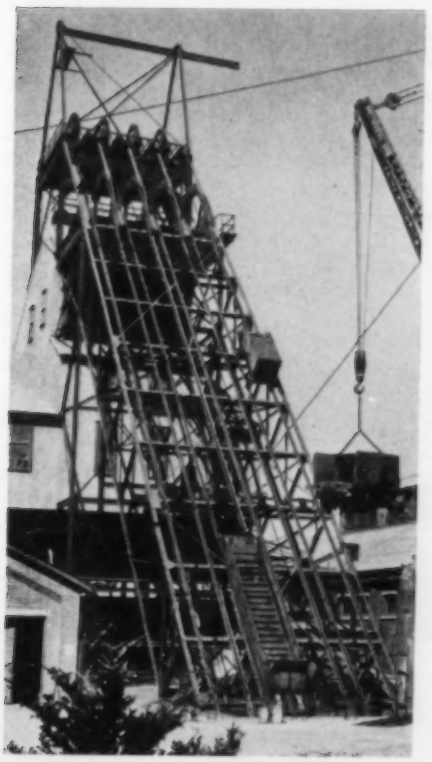

FRANKLIN MINE HEADFRAME

Ore is brought to the surface through a 4-compartment shaft that slopes about 47 degrees from the horizontal and extends 1520 feet into the ground. Steam-driven hoists in a building back of the headframe pull 6-ton skips from the bottom to the top in a matter of about 30 seconds, the hoisting speed being 3000 feet per minute.

Lack of adequate transportation in the early days was another handicap in the exploitation of the Mine Hill and Sterling Hill ore bodies. Prior to the beginning of the nineteenth century there was but one way of getting the ore out, and that was by a long, laborious haul over the mountains in horse-drawn wagons. Then, in 1822, George P. McCullock went fishing on Great Pond (now called Lake Hopatcong) and had an idea that started the chain of events which led to the building of the Morris Canal.

McCullock reasoned that the volume of water spilling out of the lake was sufficient to maintain a canal running east to Newark and west to the Delaware River. Such a waterway would make it possible to bring coal from the Pennsylvania mines to the iron forges of Sussex and Morris counties, at that time virtually shut down because of a shortage of fuel. Between Rockaway and Andover, a 15-mile stretch of the proposed canal, were 56 forges, most of them idle because they had exhausted the region's timber resources in making charcoal for fuel. Coal would revitalize the industry.

Construction of the waterway began in 1825 and ended six years later. To negotiate the 55 miles between the Delaware and Hudson rivers, the canal had to follow a winding course nearly twice that distance and go up and down the sides of mountains by a series of inclined planes. Masonry was of stone held together by lime mortar, concrete as used today being unknown. Compressed-air drills or dynamite were not available—holes were put in rocks by hand-held drills, filled with black powder, and tamped with clay. After dropping a glowing coal on the clay, the blaster ran for cover. All excavated material was removed manually, and workers labored from sunrise to sunset for 90 cents a day or less.

The Morris Canal was opened to traffic in 1831, giving Mine Hill and Sterling Hill a route over which they could easily move their ores to a smelter. Wagons began to rumble from the mines up the side of Mount Morris to the north end of Lake Hopatcong, whence barges floated them the length of the lake and into the canal for the trip to Newark. A few years later, railroads began pushing their way toward the rich mining district of Sussex and Morris counties, thus ending the transportation problem.

By 1848 there still was no clear picture of the composition of the ore bodies. Franklinite was thought to be an ore of iron, and its zinc content was deemed a detriment. Zincite was believed to be the only valuable mineral in the ore. Willemite, at first considered of little worth, actually proved to be one of the most valuable of the constituents. So The Sussex Zinc & Copper Mining & Manufacturing Company was formed with the idea of carrying on experiments to develop processes for making zinc products from the ores. A small plant was built at Newark in 1848 in which all the known methods of smelting were tried in an effort to obtain metallic zinc in paying quantities. Failing in this, the company next endeavored to produce zinc oxide for use as a pigment in paints. At that time it was made only in France. The method used there was, at the best, an expensive one and involved melting metallic zinc and burning the resulting vapors. By 1852 the Sussex men had discovered a way whereby they could make zinc oxide from the ores of the district without the necessity of first converting them to zinc metal.

Lacking a market for the new product, the company prepared white and tinted pastes of zinc oxide and demonstrated to the paint industry that they were superior to the pigments then available. Their coatings were not only of improved whiteness, tint retention, and fume resistance but also remained in suspension, a desirable quality. Manufacturers tried them, and within a few years used them to make paints which they could sell in thinned condition ready for application —the beginning of the ready-mixed-paint industry.

Assured of financial success through the development of the zinc-oxide process, the organization next turned its attention to the iron and manganese in the ores. By 1855 the New Jersey Zinc Company, as it was then known, had produced an alloy of iron and manganese from the residue of the zinc-oxide furnace. The new alloy—a bright, shiny, hard substance—was akin to the German spiegeleisen. Like in the case of zinc oxide, it found no market at the start. Subsequently it was used to build safes of such hardness that burglars' drills could not pierce them and to increase the strength of railroad-car wheels. The invention of the Bessemer process at a still later date created a large and continual demand for spiegeleisen to give the steel strength, hardness, and other desirable properties.

In 1888, John P. Wetherill succeeded in developing a method of concentration by which Mine Hill and Sterling Hill ores could be separated into their respective components. It was based on the fact that franklinite is slightly magnetic while the other minerals are not. He constructed a separator in which strong electromagnets were mounted above a belt placed a few inches above and at right angles to a belt conveying the crushed ore. As the latter passed underneath the electromagnets, the franklinite was drawn to the rapidly moving cross belt, which carried it off to the side and dropped it into a hopper. The zinc-

ite and willemite, which differ appreciably in specific gravity, were then classified by jigs. Thus, some 250 years after the deposits were discovered, was a means devised by which the three main minerals in the ores could be separated from one another. Wetherill's process made it possible for the first time to put the willemite to use. The spelter made from it was found to be of high grade, and a plant for the production of slab zinc was thereupon erected in Newark.

All the troubles of the struggling zinc industry in New Jersey were not entirely attributable to difficulties encountered in trying to smelt the ores. In 1857, as a result of misconceptions as to the structure and composition of the ore bodies, litigation arose among the various companies holding interests in the area. The section in which the deposits lay had been divided and subdivided and passed from hand to hand throughout the years. As the holder of any single parcel could and often did grant up to four mineral rights—zinc, franklinite, iron, and surface—ownership of the area was probably the most complicated of any mining district in the world.

Colonel Fowler sowed the seeds for that litigation in 1848. Believing, like others of his time, that the Mine Hill deposit was made up of two abutting and parallel veins—one zinc and the other iron ore—he conveyed title to the Mine Hill zinc to The Sussex Zinc & Copper Mining & Manufacturing Company and rights to the franklinite and "other iron ores" to the Franklinite Mining Company. Law suits resulting from this granting of two separate and distinct titles to the same vein of ore, as well as from other causes, were carried to the highest courts of the land and did not cease until the participants formed one company some 40 years later. In 1897 The New Jersey Zinc Company, as it was finally named, acquired the stock of all the others working or holding interests in the Mine Hill and Sterling Hill deposits.

Consolidation permitted the mapping out of a long-range plan for the exploitation of the ore bodies as a unit and the construction of a smelter to take the place of several small, scattered plants. A site on the Lehigh River in Pennsylvania was selected for the purpose and named Palmerton after Stephen S. Palmer, then president of the company. It was near anthracite coal fields, close to the ore supply, and an excellent shipping point. Since that time the smelting facilities there have grown to two large plants that are operated by The New Jersey Zinc Company (of Pa.), a subsidiary.

The methods by which ore is taken from the Franklin and Sterling mines today are far different from those practiced in the early days when brawny miners swung heavy hammers against hand-held rock drills and a shovel was the only loading machine known. Through the years, the deposits have seen practically every major advance in the art of mining: the development first of the steam and then of the air-powered rock drill; the invention of dynamite; the use of steam and electricity for operating hoists, scrapers, pumps, etc.; the introduction of electrified haulage systems, and so forth.

Now, the ore is brought down at the working faces with the aid of modern rock drills and other machines and is loaded by slushers or muckers into mine cars pulled by battery locomotives to chutes which dump it into electric trains for haulage to large bins. These transfer the material to 6-ton skips that hoist it from the mine through an inclined shaft at the rate of 3000 feet a minute. After separation and other treatment in a mill on the property, the bulk minerals are sent to Palmerton for smelting.

Zinc pigments and zinc metal made from the ores constitute raw materials which industry turns into countless prod-

SEPARATING THE MINERALS

The unique character of the minerals defied efforts to separate them satisfactorily for nearly 250 years after the deposits were discovered. The main pieces of equipment now used for the purpose are shown here. From a belt conveying the crushed and dried ore, powerful electromagnets in magnetic separators (bottom-left) pick up the magnetic franklinite, which is then carried off on small cross belts. The willemite and zincite in the residue ore are next separated by jigs (bottom-right), after which the willemite is concentrated on vibrating tables (upper view). The operator is shown examining the table by the light of an arc lamp that causes the willemite to fluoresce.

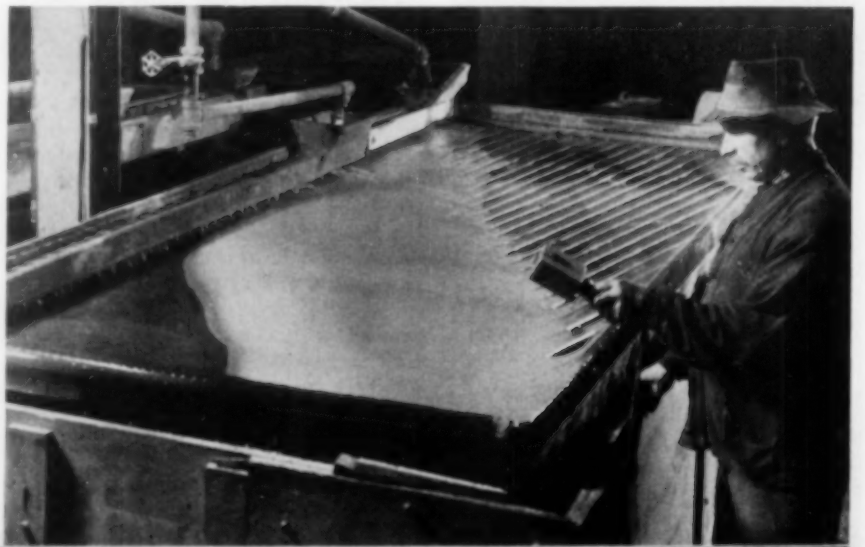

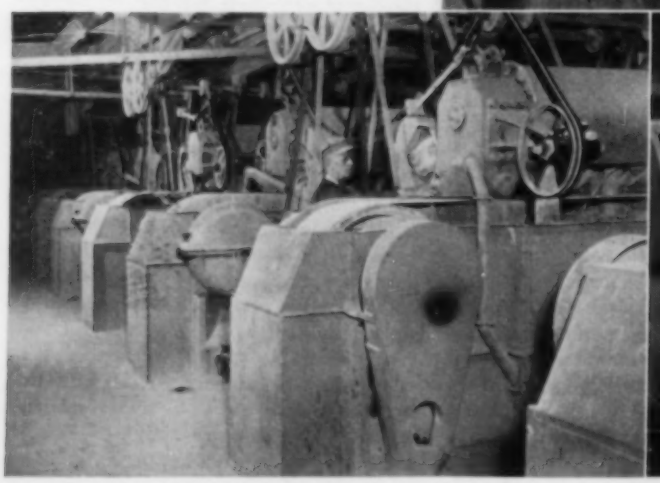

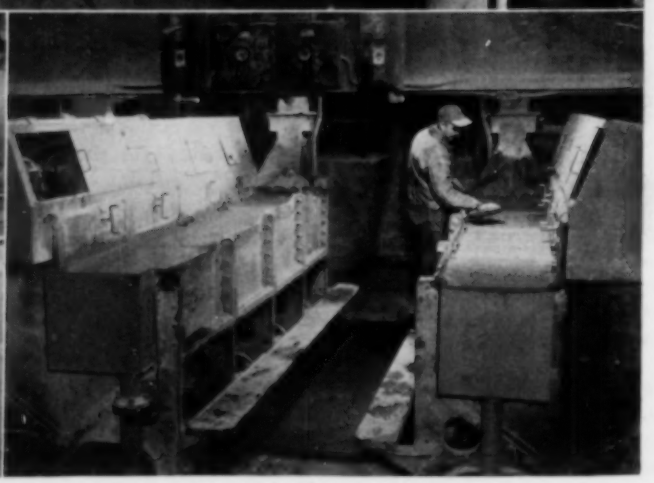

WHERE ORES ARE SMELTED

In 1899, Palmerton was just a small cluster of houses in a sleepy valley (below). Contrast that scene with the recent picture at the left showing the East Plant where zinc oxide, paint pigments, luminescent pigments, sulphuric acid, metal powders, ferromanganese, and rolled zinc are made. The West Plant, not illustrated, turns out zinc oxide, slab zinc, and spiegeleisen.

ucts for every conceivable use in the home, the office, and the factory—in fact, it is practically impossible to look anywhere without seeing something fashioned wholly or in part of zinc. The paint manufacturer mixes zinc oxide with white lead and titanium pigments so he can package the latter in thinned form ready for application. White outside paints to which it has been added are not only whiter, more durable, and cleaner than they would otherwise be but retain their whiteness over a period of years because they continually flake off in tiny bits which carry soot and dirt along with them—a unique property known as controlled chalking. Lithopone, one of the newer zinc pigments, is used extensively as a white pigment in interior house paints.

In the rubber industry, zinc oxide helps to increase the activity of the organic compounds that serve to shorten the curing period. Because it reinforces the material against wear and tear and tends to prevent overheating, it is used in the manufacture of tires for passenger cars, trucks, and buses. It also finds application in many of the processes involved in making all sorts of synthetic- and natural-rubber products.

Zinc oxide has played an important part in the ceramic industry since 1860, when it was first used as an ingredient in glass. Mixed with pottery glaze, it slows down contraction of the hot liquid, thus causing it to cool at the same rate as the pottery and lessening its tendency to craze. Incorporated in enamels for coating cast or sheet iron, the oxide lowers their melting point and helps to prevent warping of the base metal. It also gives good color, gloss, and a durable finish to ceramic ware. By far the largest percentage of the zinc oxide consumed by the industry goes into the making of enamels for products such as bathroom equipment, kitchen sinks, ranges, and refrigerators.

Because it is soothing to the skin, is harmless, and has mild antiseptic qualities, zinc oxide is a very useful ingredient in cosmetics, and The New Jersey Zinc Company supplies a special pharmaceutical grade for the preparation of ointments, creams, and powders. In ointments it serves as a local sedative and protective agent, while zinc-oxide face powder not only covers well but is also said to absorb ultraviolet rays from the sun better than any other white pigment, thus acting as a sunburn preventive.

Pigments that glow in the dark are made from the zinc ores. They are of two kinds: phosphorescent and fluorescent. The former glow for an indefinite period after they have been energized by visible light (sunlight or ordinary electric light), while fluorescent pigments shine only when actually energized by certain invisible light rays such as ultraviolet—"black" light—present in the spectrum. Both are used in connection with plastics, paints, inks, paper, and textiles and enter into the manufacture of a long line of products such as directional signs, switch plates, dials for radios and automobiles, and a variety of things to point our way at night. They are also utilized to give toys, gifts, etc., glowing colors, as well as to provide decorative advertising effects.

Coating iron or steel with zinc protects it against rust. Woven-wire fencing and strip-steel products such as rolled metal containers, radio chassis, electrical cable, and hardware are among the many commodities that are galvanized to offset corrosion. Just how important that industry is today is brought out by the fact that, on a volume basis, it is the largest industrial consumer of zinc.

Die-casting has become one of the leading high-speed production methods of our day largely because of the availability of zinc alloys. By this process, molten metal under pressure is forced into steel dies. Its chief advantage lies in the fact that it permits reproducing with accuracy complex shapes that would be hard to make by other means. An alloy is needed for this purpose that will flow readily to all corners of the die, set quickly, and possess strength and hardness.

The New Jersey Zinc Company puts out two special products for die-casting: Zamak, an alloy of high-purity zinc, aluminum, and copper; and Horse Head Special slab zinc, which is more than 99.99 percent pure. These serve to turn out an endless list of articles in everyday use in industry and in the home. The fittings on that gleaming new refrigerator or washing machine are zinc die castings plated with chrome. The grillwork on the front of that shiny new automobile is similarly made, and its carburetor, fuel pump, and other engine and body parts are cast in the same manner, as are parts of lighting fixtures, radios, tools, elec-

trical appliances, vending machines, typewriters, and business machines, to mention only a few.

The brass industry also is an outlet for slab zinc. An alloy of copper and zinc, the metal generally contains about 30 percent zinc and serves to form a wide variety of products including household hardware, plumbing fixtures, and rods and tubes for industrial application. For such purposes as deep drawing cartridge cases, for example, it is necessary to use high-purity zinc to give the brass the required ductility and formability. The greatest single demand for brass containing zinc of this quality is in the manufacture of condenser tubes required in generating steam, in refining oil, and in similar industrial processes.

Rolled zinc comes in the form of strips, sheets, and plates and there is an extensive demand for it in the metal-fabrication field. The largest use to which it is put is in the making of dry-cell battery cans where it serves both as container and as active chemical. Other products include weather stripping, molding, roofing and siding, screen frames, eyelets and grommets, and many other things turned out by spinning, drawing, and stamping.

Spiegeleisen is one of the oldest and most adaptable alloys known to the steel industry. Composed of iron and manganese, it is used in the manufacture of basic open-hearth steel, electric-furnace steel, and Bessemer steel, as well as gray and malleable iron in the cupola or air furnace. Its primary purpose is to cleanse steel of impurities during the refining period, but frequently it is added to the initial furnace charge to increase the amount of manganese in the finished product.

The New Jersey deposits are more than just an oddity of nature. Their size, richness, and type of mineralization alone are enough to set them in a class by themselves. But more important than these characteristics is the part they played in the economic development of our country. Every zinc ore contains some contaminants, and only in the past few decades has it been possible through metallurgical advance to do more than crudely control the quality of the zinc obtained from a given ore. Because those from the Franklin-Sterling mines contain far less impurities than other zinc ores, the metal produced from them in the early days had unusual properties. That enabled the United States to forge ahead in several important industries and, by so doing, affected the lives of all Americans. Because of this, the two deposits in northern New Jersey that yield the peculiar red, green, and black zinc ore have earned a place in our nation's history.

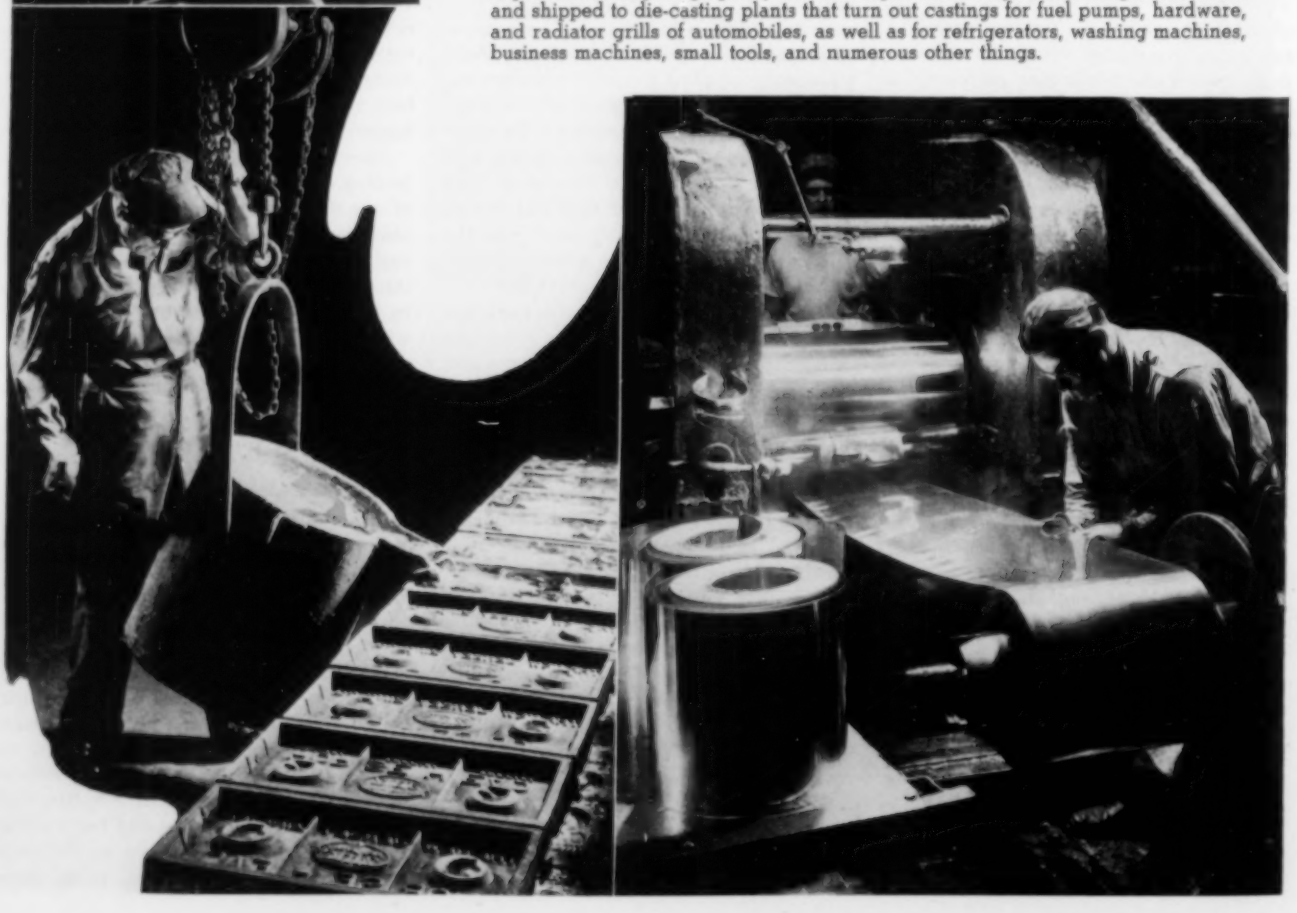

ZINC PRODUCTS

The ores sent to the smelting plants emerge as a number of different industrial raw materials. The view at the upper-left shows a furnace that turns out zinc oxide for use in the making of decorative and protective finishes. Rolling mills, pictured at the lower-right, produce zinc strips, sheets, and plates that are converted into battery cans, weatherstripping, molding, fruit-jar tops, eyelets, and protective plates for ships' hulls. Slab zinc (lower-left) serves to coat (galvanize) iron and steel to prevent rusting. High-purity slab zinc is produced in specially designed furnaces and shipped to die-casting plants that turn out castings for fuel pumps, hardware, and radiator grills of automobiles, as well as for refrigerators, washing machines, business machines, small tools, and numerous other things.

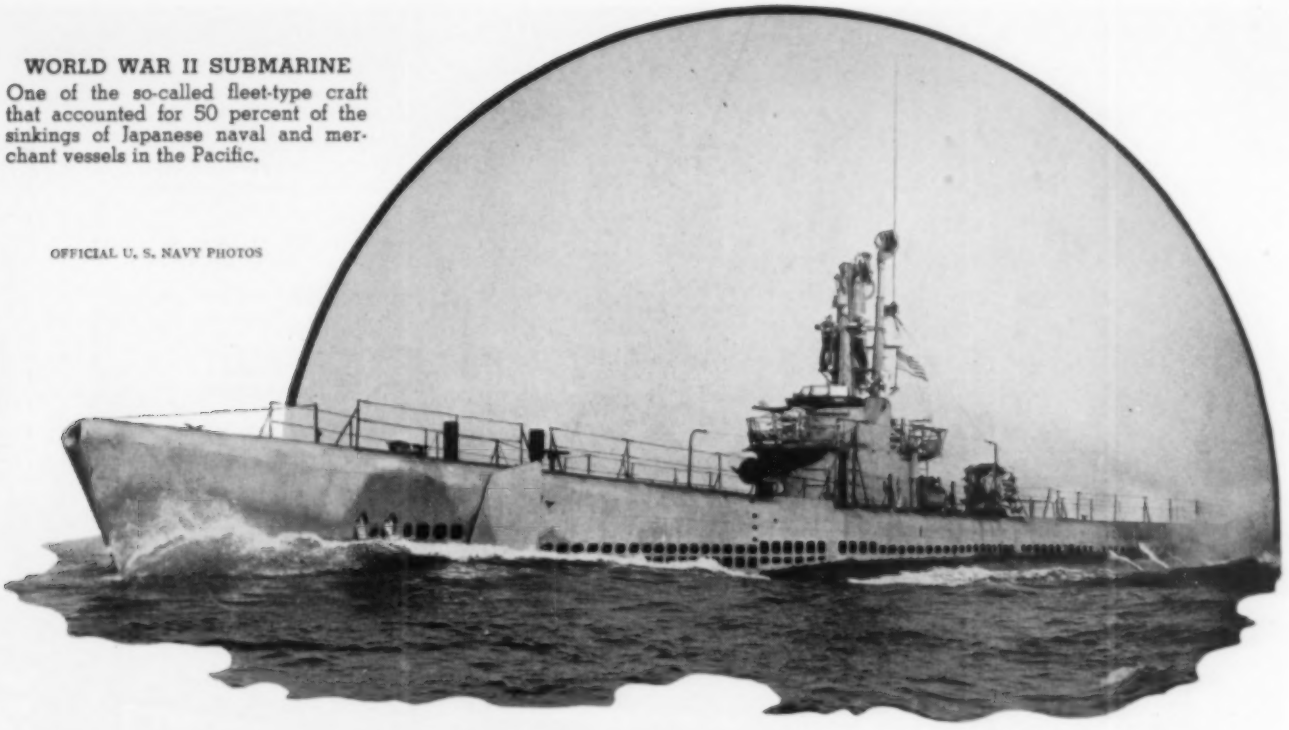

WORLD WAR II SUBMARINE
One of the so-called fleet-type craft that accounted for 50 percent of the sinkings of Japanese naval and merchant vessels in the Pacific.

OFFICIAL U. S. NAVY PHOTOS

Air Power on American Submarines

Five Distribution Systems Provide Various Pressures to Perform Vital Services

Howard S. Dewey

ON OUR first submarines, compressed air was used primarily for forcing water from the ballast tanks when it was desired to surface the craft. Since then, with each successive change in design, the importance of compressed air has increased until it performs a multitude of duties. Its functions range from controlling virtually every operation in connection with diving and surfacing to the ignoble chore of blowing waste from sanitary tanks. Air pressure maintained in an air-accumulator flask operates the submersible's main hydraulic system. Air power discharges its lethal torpedoes and starts its main propulsion engines. To make sure of hull tightness before diving, compressed air serves to "put pressure in the boat."

Air can be compressed easily aboard a submarine because only a relatively small plant and comparatively simple equipment are required for the purpose. It can be stored in small steel receivers and is always ready for use. The precise action desired can be obtained from it by varying the pressure, and as air has a cushioning effect on working mechanisms wear and tear on them is reduced. It consumes no valuable materials and can be readily piped to any part of the craft. Air once stored can be applied without further expenditure of energy—in fact, is a source of power for the operation of other equipment.

There are five separate air systems on the modern underwater boat: the 3000-psi. high-pressure system, the 600-psi.

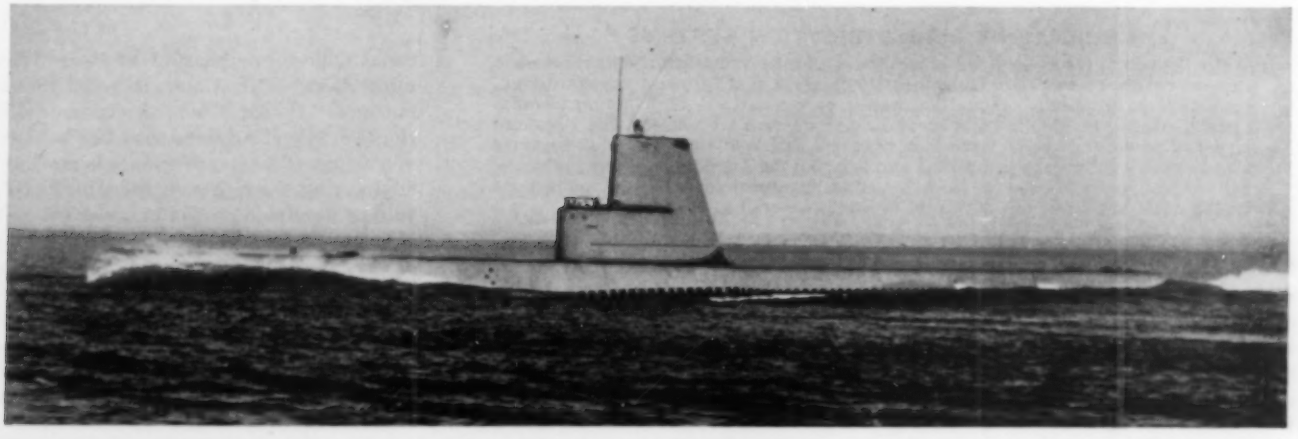

POSTWAR SUBMARINE
Compare the seal-slick lines of the conning tower with the cluttered superstructure of the boat shown at the top of the page. This new type is known as the "guppy-snork," a term that designates streamlined fleet-type subs that are equipped with "snorkels" and new, more powerful batteries. The snorkel is a slender air-intake tube that projects above the surface while the vessel is running underwater and enables the diesel engines to keep functioning. Snorkel is derived from the German "schnorchel," which means breathing tube.

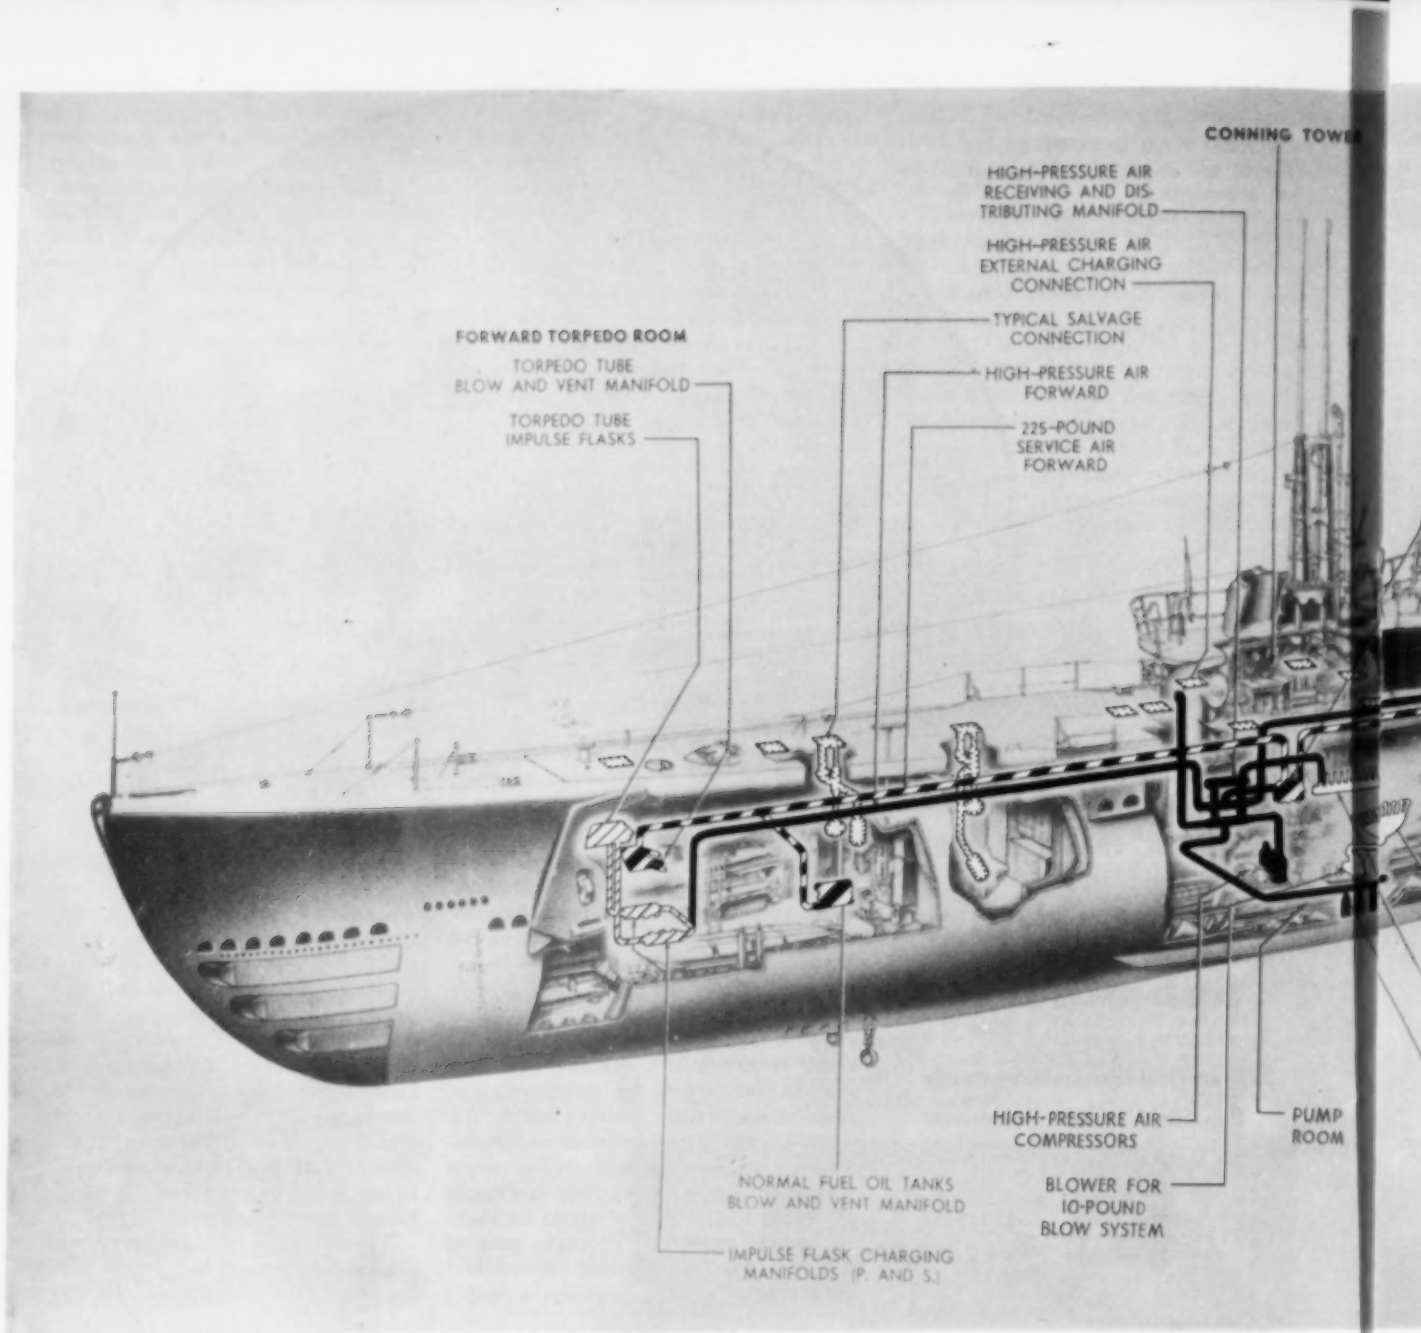
CONNING TOWER
HIGH-PRESSURE AIR RECEIVING AND DISTRIBUTING MANIFOLD
HIGH-PRESSURE AIR EXTERNAL CHARGING CONNECTION
TYPICAL SALVAGE CONNECTION
FORWARD TORPEDO ROOM
TORPEDO TUBE BLOW AND VENT MANIFOLD
HIGH-PRESSURE AIR FORWARD
TORPEDO TUBE IMPULSE FLASKS
225-POUND SERVICE AIR FORWARD
HIGH-PRESSURE AIR COMPRESSORS
PUMP ROOM
NORMAL FUEL OIL TANKS BLOW AND VENT MANIFOLD
BLOWER FOR 10-POUND BLOW SYSTEM
IMPULSE FLASK CHARGING MANIFOLDS (P. AND S.)

SUBMARINE AIR-DISTRIBUTION SYSTEMS

While the boat is submerged, the compressed-air supply for all its different pressure systems comes from storage tanks that are charged at 3000 psi. by motor-driven, multistage compressors. When the craft is on the surface, the conning tower is opened and blowers that furnish air at 10 psi. pressure are started. The 10-pound air takes care of all the services then operated and thus conserves high-pressure air. In case a submarine is disabled and lying on the sea bottom, a salvage vessel can introduce compressed air to each compartment through external connections on the deck and thus blow out water to bring the craft to the surface.

blowing system for the main ballast tanks, the 225-psi. "ship's-service air system," the 10-psi. main-ballast-tank blowing system, and the salvage air system. All are normally supplied with air from a compressor plant located in the pump room underneath the control-room deck. The machine currently being furnished for American submarines is a direct-connected, motor-driven unit that has a capacity of 20 cubic feet per hour at a discharge pressure of 3000 psi., which is the equivalent in free or atmospheric air of 4080 cubic feet per hour or 68 cfm. For some purposes the air is used at this final pressure of 3000 psi.; for others it is reduced by regulating valves and fed to the several lower-pressure systems just enumerated. Distribution and reduction call for an extensive network of connected manifolds, piping, and valves.

The reason for selecting 3000 psi. as the maximum air pressure on American submersibles has been outlined by Commander J.R.Z. Reynolds, U.S.N., Material Officer on the staff of Rear Admiral James Fife, Commander of Submarines, Atlantic Fleet. A graduate of the U.S. Naval Academy and the holder of a degree of master of science in marine engineering from Massachusetts Institute of Technology, Commander Reynolds has specialized in submarine engineering for the past twenty years.

"Torpedoes," he states, "must be charged with 2800 pounds of air in order to obtain maximum running range. This apparently set the criterion for 3000-pound air pressure on pre-World War I submarines, a practice that has been consistently adhered to ever since. A pressure of 4500 pounds has been suggested as being more satisfactory from the viewpoint of economy and efficiency of operation. One objection to this is that it would create extra problems in the

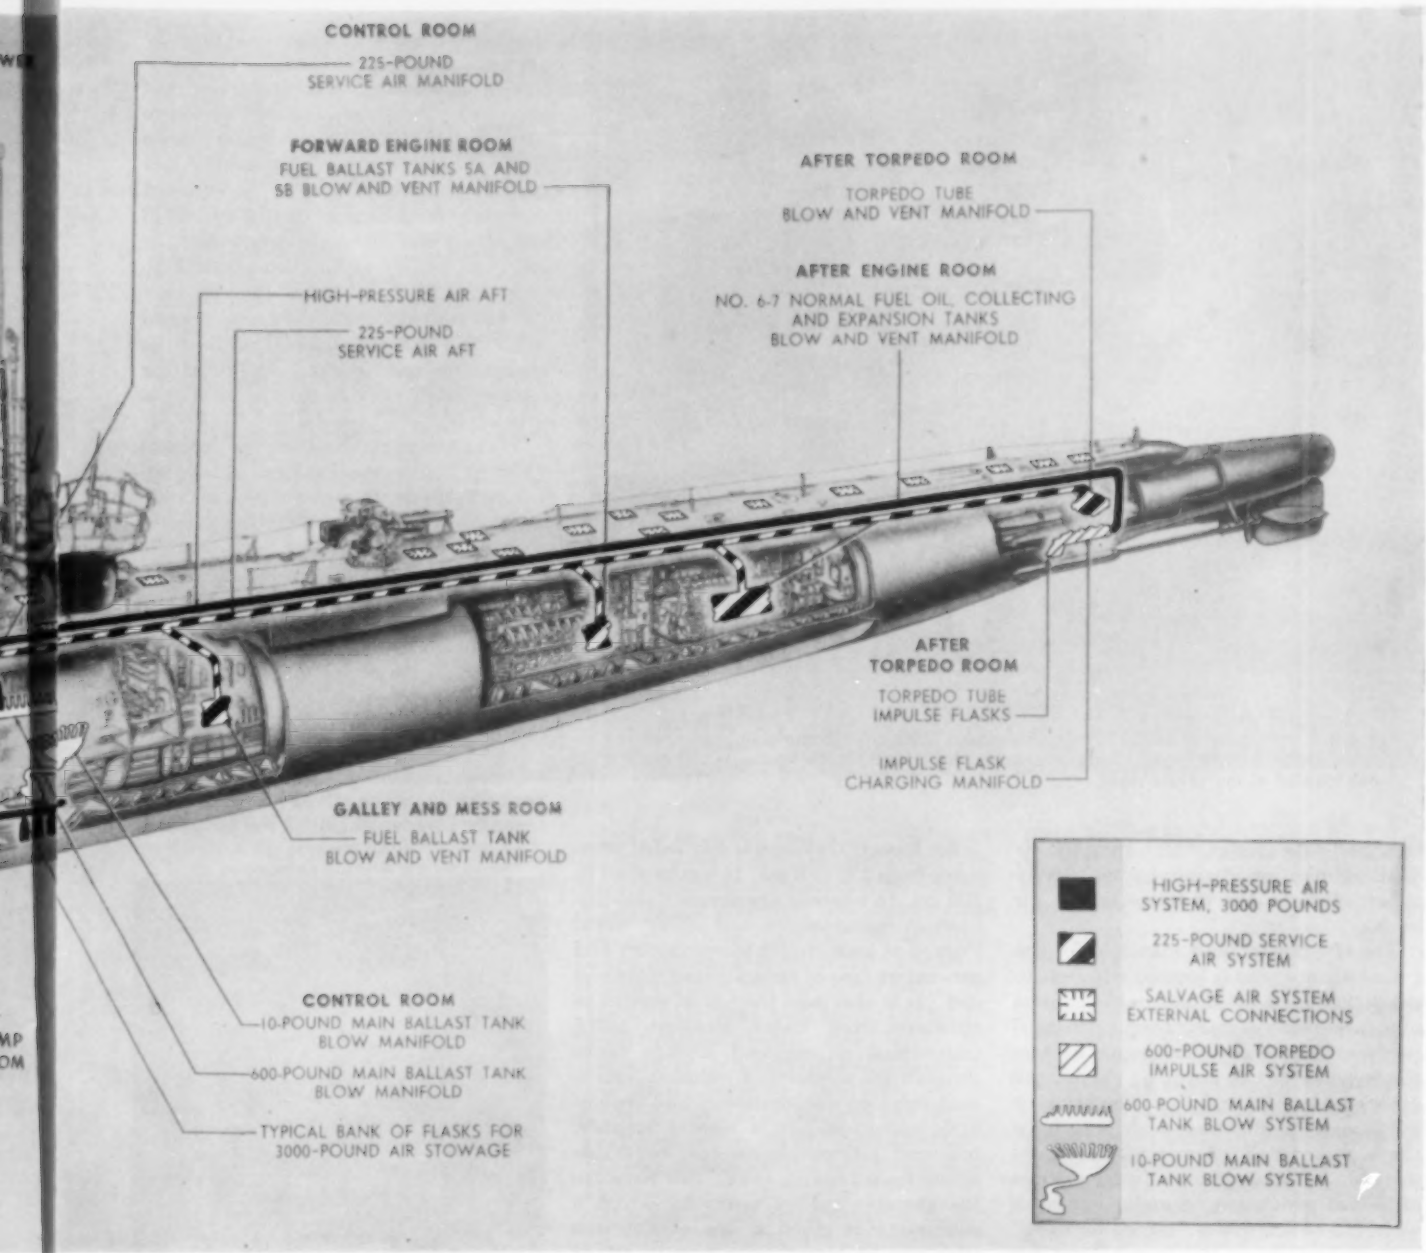
CONTROL ROOM
225-POUND SERVICE AIR MANIFOLD
FORWARD ENGINE ROOM
FUEL BALLAST TANKS 5A AND 5B BLOW AND VENT MANIFOLD
HIGH-PRESSURE AIR AFT
225-POUND SERVICE AIR AFT
AFTER TORPEDO ROOM
TORPEDO TUBE BLOW AND VENT MANIFOLD
AFTER ENGINE ROOM
NO. 6-7 NORMAL FUEL OIL COLLECTING AND EXPANSION TANKS BLOW AND VENT MANIFOLD
AFTER TORPEDO ROOM
TORPEDO TUBE IMPULSE FLASKS
IMPULSE FLASK CHARGING MANIFOLD
GALLEY AND MESS ROOM
FUEL BALLAST TANK BLOW AND VENT MANIFOLD
CONTROL ROOM
10-POUND MAIN BALLAST TANK BLOW MANIFOLD
600-POUND MAIN BALLAST TANK BLOW MANIFOLD
TYPICAL BANK OF FLASKS FOR 3000-POUND AIR STOWAGE
HIGH-PRESSURE AIR SYSTEM, 3000 POUNDS
225-POUND SERVICE AIR SYSTEM
SALVAGE AIR SYSTEM EXTERNAL CONNECTIONS
600-POUND TORPEDO IMPULSE AIR SYSTEM
600-POUND MAIN BALLAST TANK BLOW SYSTEM
10-POUND MAIN BALLAST TANK BLOW SYSTEM

maintenance of compressors and air-distribution systems. The work load would increase and reliability would decrease. Reliability is an important factor on submarines," he concludes, "for providence grants few second chances to the submariner." The Germans held to the 3000-pound standard in their most advanced boats, although the British disdain this pressure and use 4000 pounds instead.

Following its compression, the air is distributed through a receiving manifold to air banks, of which there are five with a combined capacity of approximately 580 cubic feet. Four of them are each composed of seven connected flasks or bottles, which are similar in shape to welders' acetylene flasks. The fifth is an 8-bottle emergency bank which normally serves only when one or more of the others are empty or damaged. To conserve space, the former are located in the ballast tanks, which bulge out from the pressure hull like blisters on a finger, while the emergency bank is inside the protective pressure hull.

Once the banks are charged, the procedure can be reversed—air can be taken from them through the receiving manifold and thence to two distribution manifolds. From the latter it can be routed to the forward and after torpedo rooms or to the main propulsion-engine starting flasks, where it is reduced in pressure. In the torpedo rooms the high-pressure air can be used to charge the "fish" or directed to the torpedo impulse flasks. Air from the latter, which are miniature flasks, serves to eject or "fire" the torpedoes from their tubes.

The receiving and distribution manifolds are the key manifolds of the high-pressure system and are arranged horizontally one above another in the control room. In addition to bank stop valves, the receiving manifold is provided with an external charging connection with a line running topside so that high-pressure air can be obtained from an outside source. On the distribution manifolds there are stop valves for blowing certain of the tanks that are designed to resist that pressure. Another connection charges the hydraulic-accumulator flask which maintains a steady pressure on the reservoir of oil on the piston which, in turn, provides the hydraulic system with a volume of oil at the desired pressures. This piston operates in much the same manner as the hydraulic grease rack at your neighborhood service station. The three manifolds are further

STANDING BY TO BLOW MAIN BALLAST TANKS

Control equipment of distribution air manifolds, with gauges showing pressures in the various storage tanks. Regulator valves for admitting air to the ballast tanks are located at the upper right.

equipped with gauges which keep the air manifoldman or "windjammer" fully informed as to the pressure in the air banks.

The 600-pound blow manifold for the main ballast tanks is located adjacent to the 3000-pound manifolds in the control room and receives its air from a distribution manifold of the 3000-pound system through one of two reducing valves, the other serving as a standby. The primary purpose of the 600-pound air is to blow those tanks free of water when submerged. This manifold is simply a series of valves which are normally left open when the submarine is "rigged for dive" and secured when the vessel "rigs for surface" and returns to port, each valve being a stop to its own ballast tank. The master or "hammer" valve which controls the amount of air which is allowed to flow from the high-pressure to the 600-pound manifold is not an automatic reducer. Air pressure is manually controlled by the volume admitted to the 600-pound system, which is equipped with relief valves and is tested hydrostatically to 1000 psi.

The 225-pound or "ship's-service" system is the submarine's utility air system. It controls or furnishes power for more than 100 operations from bow to stern and is more extensively used than any of the others. A maze of piping, valves, pressure reducers, and connections, it spreads throughout the various compartments of the boat. The center of this complex, spidery network is the manifold which, like the 600- and 3000-pound manifolds, is in the control room.

Air from this system is applied at pressures from 225 to 8 psi. It serves at 80 to 100 psi. to operate pneumatic tools utilized in maintenance and repair work. Purged of moisture, it blows motors and generators free of accumulated dust and dirt. It is also used instead of pumps to circulate fresh water, pressure being maintained on enclosed storage tanks through the medium of reducing valves that function automatically and require little attention. In a similar manner, fuel and lubricating oil can be transferred from tank to tank. Sea water in the variable ballast tanks by which a submarine is given a fine equilibrium trim can be blown from fore to aft or vice versa in whatever quantity may be desired.

Wherever possible, service air substitutes for pumps, the advantage being a reduction in machinery and electrical-power consumption. Its most attractive asset from the submariner's point of view is that it is quiet in its operation, which is highly desirable when trying to blow water from one tank to another and yet evade stalking destroyers. The whistle and siren, too, are actuated by air from this system.

Although high-pressure air is a quick and effective medium for blowing ballast tanks, economy in its use must be practiced. For that reason a low-pressure blower is carried on submersibles to complete the evolution of "blowing up." Once the boat has surfaced, the conning-tower hatch, which is the highest point on the pressure hull, is opened and the blowers are cut in. They are located in the pump room with a manifold directly above in the control room.

The blowers furnish air at a pressure of about 10 psi. to the manifold which, in turn, distributes it to the ballast tanks that are to be blown. This complete and independent air system is the simplest one aboard. Controls on the manifold can direct the air to any single tank or group of tanks. It is also possible to compensate for any "list" the ship may have by blowing to the port or starboard side of split ballast tanks. The Germans eliminated this system by diverting main-engine exhaust gases into the tanks.

Being concentrated in the control room at one station, the controls of all the air systems are manned by one crewman. During diving or surfacing, it takes the agility of a 16-year-old boy to handle them all in quick succession. From a maintenance angle they present an even greater problem. The frustrated auxiliaryman, who must crawl into this maze of piping in order to fix a leaky connection, needs a pointed head and three extra hands.

The final air network, which is seldom used but religiously tested and operated periodically, is the salvage air system. It includes internal facilities for the use of

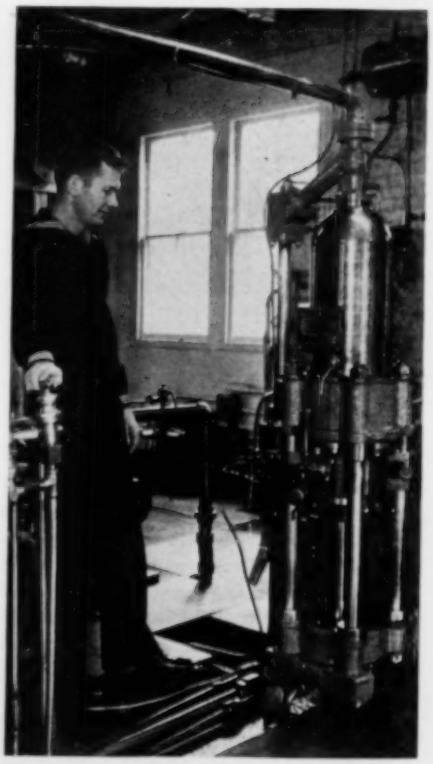

HYDRAULIC ACCUMULATOR

A crewman at the Submarine Base in New London, Conn., familiarizes himself with an essential piece of submarine apparatus. His hand is on a valve that controls the admission of compressed air behind a piston that puts pressure on fluid in a steel bottle. The pressurized fluid is piped around the boat for operating various mechanisms.

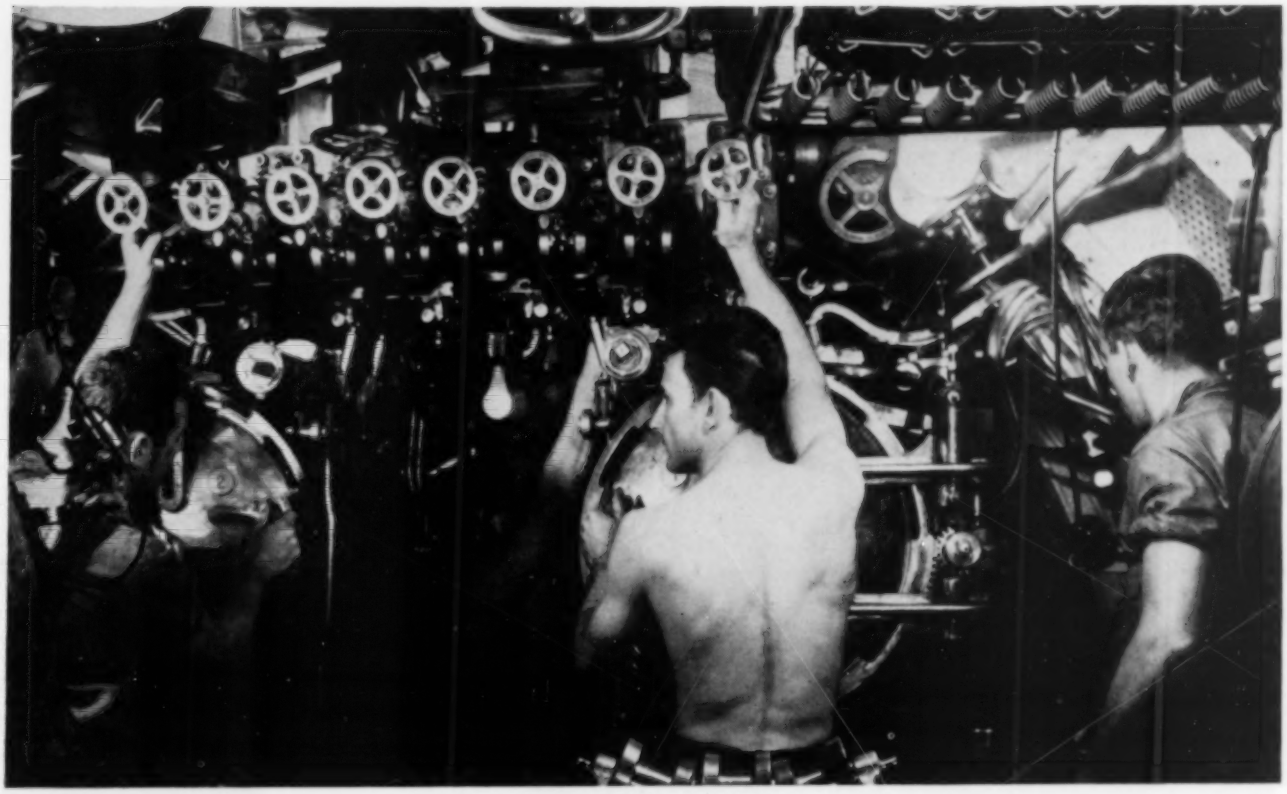

READY TO FIRE TORPEDO

Scene in the forward torpedo room of a U. S. submarine with its welter of control mechanisms. The bare-backed crewman has one hand on a quick-opening valve lever, ready for the signal to fire a torpedo or "fish" from its tube with air at 2800 psi.

the crew and external connections for outside agencies such as divers. In the case of the former there is a branch line in each compartment from the 225-pound air system, with a valve that can be actuated from an adjoining compartment. This allows crewmen to blow water out of one that is flooded while remaining safe and dry in the compartment located immediately aft or forward of it.

The external system is more complicated in its details and used in the event a submarine is lying on the bottom disabled, with its crew either dead or unable to surface her. Each ballast tank is provided with a salvage line and valve which can be operated from the topside deck. In service, an air hose from a rescue vessel is connected to the line by a diver, the valve is opened, and air from the salvage craft is then forced successively into the stricken submarine's ballast tanks. Each can be blown dry in this manner and the boat returned to the surface.

Each compartment has one salvage valve and line located at each end. These, too, are accessible from the deck. One, termed the high-connection valve, supplies air near the high point of the hull; the other, called the low-connection valve, is equipped with a pipe extending to the low point in the compartment. To blow it dry, both connections are opened. Compressed air enters the compartment through a hose from the rescue vessel, while the water is forced out and overboard through the low connection. All the topside lines and valve fittings for both compartments and tanks are marked by individual plates bolted to the deck nearby. The plates are affixed with round-head screws and lugs so that a diver can readily identify each of the compartments and tanks simply by touch.

Atomic power being what it is, any prediction as to the future of submarine air systems is a precarious thing. It is generally believed, however, that they are high-pressure bound. This statement is made in view of the fact that designers dream of a vessel plunging 1000 or more feet into the ocean. Air pressures must, willy-nilly, climb proportionally higher with every added foot of water the submarine will be built to penetrate. Air lines with their thick walls will carry pressures up to 6000 pounds. Regardless of inherent faults that attend higher pressures, they would give the underwater boat a greater volume of indispensable compressed air.

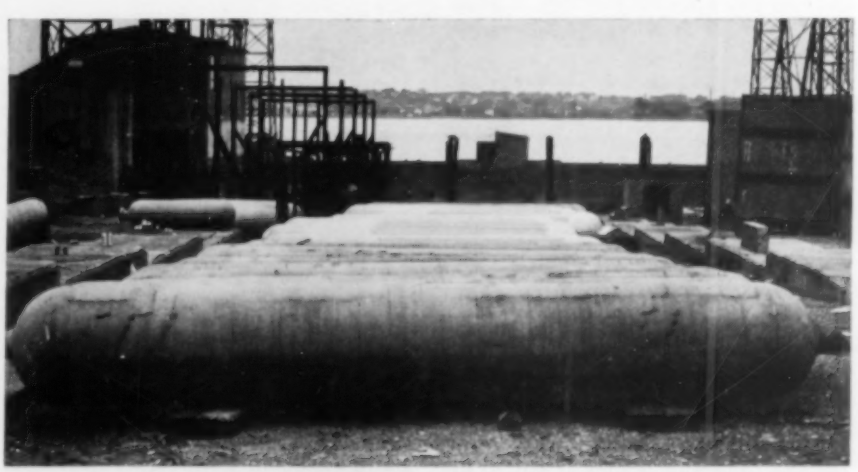

HIGH-PRESSURE AIR FLASKS

Steel cylinders for the storage of air shown on building ways awaiting painting and final coating with a plastic before being placed aboard a submarine. The ones in the foreground are 18 inches in diameter and 11 feet 4 inches long. The flasks are arranged in banks normally of seven each.

Keeping the Gas Flowing

Air-Operated Tools Help Texas Eastern Transmission Corporation Maintain Its Extensive Pipe-Line System

C. H. Vivian

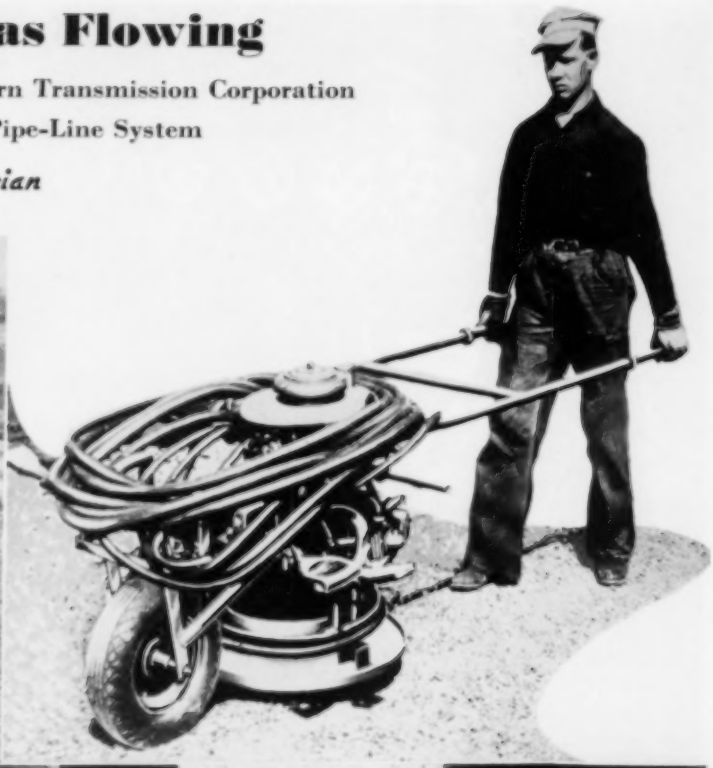

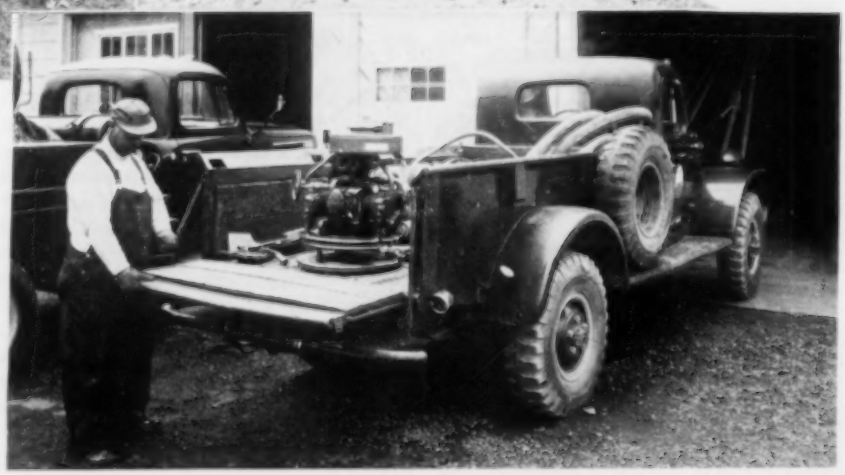

GETTING AIR POWER TO THE JOB

The 3R-30 compressor was developed for railroad track work and has only recently been introduced into the construction field. Its radial design, with three gasoline-engine power cylinders and three compression cylinders alternated at 60-degree intervals, results in smooth conversion of engine torque into air power without the use of a heavy flywheel. Extreme compactness and light weight make the unit easy to transport to off-road locations where much pipe-line work is done. Although it is small, the machine is carefully and precisely built for heavy duty and compares well in dependability with larger compressors. At Texas Eastern maintenance stations the 3R-30 is ordinarily hauled about in a Dodge Power Wagon (lower picture), along with complementary tools, hose lines, etc. Upon arrival at the working site (upper-left) a lifting bar is slipped into place and two men unload the machine and carry it to wherever it is needed. A pneumatic-tired wheelbarrow mounting (upper-right), which can be quickly affixed, enables one man to push the compressor to points the truck cannot reach.

THE recent pronounced increase in natural-gas pipe lines in America has brought with it steadily mounting maintenance burdens. The problems arise not only from the growing mileage of transmission lines in service but also from the trend towards larger-diameter pipe and higher operating pressures. Trunk lines of 20-, 24-, and even 30-inch diameter are becoming common rather than extraordinary, and pressures of 500 psi. and higher are no longer unusual. Some systems are already operating in the 750-psi. range; and engineers, without so much as lifting their eyebrows, talk of going to 900 psi. in the near future.

A natural-gas pipe line, like a railroad, is a public-service enterprise. It carries a commodity that is vital to the comfort and economic life of entire cities, even states. An interruption in service can paralyze the normal activities of thousands of persons. In the interest of public convenience and necessity, it is therefore incumbent upon transmission companies to exert every effort to maintain scheduled deliveries. They themselves have a selfish interest in doing this, for crippled or dead lines bring in no revenue.

The nation has long had extensive networks of oil pipe lines, but the need of keeping them functioning is not so urgent as it is in the case of the newer gas lines. Petroleum or its products go from fields to refineries or distributing depots —not directly to consumers. Moreover, temporary supplies can be stored to tide over periods of pipe-line shutdown. Natural gas, on the other hand, is a household and industrial utility. It can't be accumulated in appreciable quantities near points of use. If the pipe line ceases to deliver it, even for a few minutes, consumers begin to suffer. Obviously then, the responsibility of maintaining continuous service is a heavy one.

Natural-gas pipe lines sprawl across the country for hundreds of miles, most of them obtaining their supply in the Southwest. Although the pipe, even in the larger sizes, has walls less than half an inch thick, it is sufficiently strong to withstand the pressures involved, thanks to ever-advancing steel-mill metallurgy and manufacturing technique. High-

pressure pipe now laid is of welded-seam or of seamless-steel construction, and it undergoes rigorous testing and meticulous inspection before it is approved for service. Sections of transportable length are joined in the field by welding, and despite the unbelievable speed with which they are laid they are put together with extreme care and precision.

Before being lowered into the trench, the pipe is scrupulously cleaned, then coated and wrapped to shield it from ordinary corrosion. To thwart corrosion caused by electrolytic action—by stray currents picked up from the ground, opposing currents are induced by cathodic protection systems. Account is even taken of the effects of seasonal and diurnal temperature changes, the line being strung in a sinuous fashion to permit the forces of expansion and contraction to exert themselves with a minimum of harm. Actually, a large line does considerable writhing in its trench, shortening itself in winter and lengthening in summer. Where it crosses a hill it tends to creep down slope when warm, and, if not properly constructed, ensuing contraction during the following cold season may put the crest section under great pulling strain.

Numerous interstate transmission lines represent expenditures of more than 100 million dollars each, and others, calling for equally large outlays, are being constructed or planned. Since the earnings on the investment are adversely affected by service interruptions, it is sound business to make adequate provisions for maintenance, aside from the paramount consideration of fulfilling obligations to customers. As in the case of a railroad, maintenance crews are stationed all along the line, with the distances between bases short enough to permit reaching all intervening points quickly and conveniently.

The crews cover a wide range of activities. They may be called upon to cope with anything from a washout caused by a flash flood along the right of way to repairing a break in the line under stress of getting it back in operation without wasting a minute. Most of their day-to-day jobs are of such a routine nature as changing valves or piping around compressor stations, tapping lines for making additional connections, or installing new equipment of one sort or another. Nevertheless, they must be prepared to meet any emergency that may arise along the lines or at the stations.

To perform their widely varying tasks effectively and quickly, the crews are turning more and more to power equipment. And, as is true of all maintenance work, this includes a liberal use of air-operated tools, which are particularly well suited for natural-gas companies because they present no hazard of fire or explosion. Air-powered tools, especially impact wrenches and drills, have long been regularly employed for overhaul and repair jobs in the compressor stations, and now they are being used increasingly on the lines themselves.

Accompanying illustrations show typical applications of some of the compressed-air equipment recently put in service by Texas Eastern Transmission Corporation, which purchased and converted to gas transmission the Big Inch and Little Big Inch lines built by the Government in 1942-43 to move crude oil and gasoline from Texas to the Atlantic seaboard. The Big Inch consists of 1254 miles of 24-inch-diameter pipe, mainly seamless, running from Longview, Tex., to Eagle, Pa., with connecting smaller lines to Philadelphia and Staten Island (Borough of Richmond), New York City. The Little Big Inch is a 20-inch line, mainly electric welded, that extends 1479 miles from Beaumont, Tex., to Linden, N. J. Both have gathering networks at their western extremities. From Little Rock, Ark., to Eagle the two main arteries run side by side over the same right of way.

For operating purposes, the line is divided into four sections. Division No. 1 runs from Longview on the 24-inch and Homer, La., on the 20-inch to the Mississippi River; No. 2 from the Mississippi to the Ohio; No. 3 from the Ohio to Philadelphia and New York; and No. 4, the latest one, from Homer south to Beaumont and Baytown, Tex. Every division has two maintenance headquarters under each of which work five or more crews based at strategic points. All told, there are 32 crews—one every 50 miles—of four men in the small units, or an average of six per crew. A foreman is in charge of each gang. The number of workers varies, usually being greatest at maintenance headquarters.

Typical of the organization throughout the system is the setup in the section visited by the writer. It covers the eastern part of Division No. 3 and extends from a point west of Chambersburg, Pa., to New York and Philadelphia. Headquarters are at Station 25 located about midway at Eagle, on which a crew of seven is based. There are crews of four each at Chambersburg and Marietta, Pa., and one of five at Linden. Including a maintenance foreman at Eagle

OPERATING A PAVING BREAKER

In many instances the compressor remains on the truck while it supplies power for such operations as tamping backfill in a trench with a PB-6 paving breaker equipped with a tamping pad (left). Where the machine is unloaded, it need not be leveled to function smoothly but can be put down on uneven ground. It is shown at the right powering a spade-equipped paving breaker being used to loosen earth in making an excavation along a pipe line.

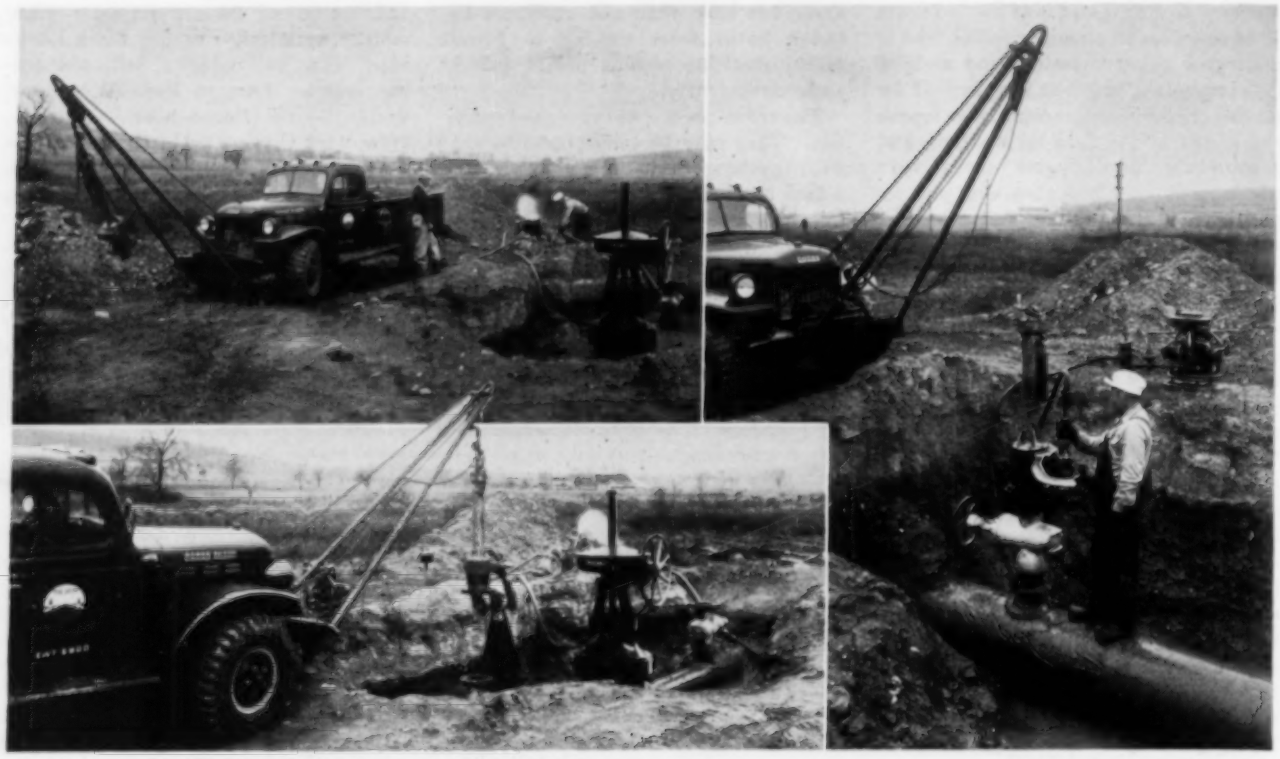

TAPPING A LINE UNDER PRESSURE

These pictures show a 20-inch line being tapped for the installation of a blow-off connection while gas under 400 psi. pressure continues to pass through it. The crew rides to the job in a Dodge Power Wagon, which also carries the 3R-30 compressor and accessory equipment in the truck body and a Mueller tapping machine suspended from gin poles on the front. If, upon arrival at the job, (upper-left) it is found that a previously made excavation has filled with water it is pumped out in a few minutes with a Homelite pump driven by a gasoline engine. Next (lower-left) the Power Wagon is run to the edge of the excavation and the tapping machine lowered onto the flange of a valve that has been welded on top of the pipe line. The tapping machine is bolted securely to the flange, its air motor put in place, and the tap is made (right) with power delivered by the 3R-30 compressor. Because the motor does not require the full 80 psi. pressure at which the air is discharged, a Chaplin-Fulton regulator is interposed in the delivery line to reduce the pressure, as desired. The valve is opened while the tap is being made, then closed and the machine removed. A blow-off stack about 6 feet high was subsequently bolted to the valve flange and provides a means of venting the line whenever it becomes necessary to take that particular section out of service.

in charge of all four crews, the total manpower is 21.

To increase the efficiency of its maintenance work, Texas Eastern recently bought the following equipment from Ingersoll-Rand Company: Two 105-cfm. trailer-mounted portable air compressors; seven 3R-30 portable compressors with wheelbarrow mountings; seven PB-6 paving breakers and a complement of steels for each; twenty-one No. 534 and twenty-one No. 577 impact wrenches with accessory bits and sockets; and the necessary hose and couplings to deliver air to the tools. This equipment is distributed among the various crews. As the impact wrenches are the most used of the tools, every crew has one of each size.

The compressors are spaced along the line at an average interval of 200 miles, and because they are mobile all are at the disposal of several crews based on opposing sides of the points at which the machines are stationed. As a matter of fact, there is considerable trading back and forth of the tools other than the impact wrenches, the aim being to schedule the work of the crews so that all the equipment will be kept busy a good part of the time. Several chipping hammers and Multi-Vane drills have been added since the initial purchase was made, and these, too, are available for use by any of the crews within reasonable driving distance of their bases.

One of the principal reasons for buying the equipment was to have it at hand in case of emergencies anywhere along the line. The crews talk about them with their fingers crossed, so to speak, and hope they won't happen. Actually, though comparatively rare, they do occur, and the better the provisions to cope with them, the sooner normal service and, incidentally, normal earning power will be restored. It goes without saying that an emergency calls out at least the two crews stationed nearest it and, if serious, those farther away. All the tools and compressors that may be required are likewise concentrated at the site, and the crews relieve one another so as to make the repairs without a halt until they are completed. In extreme cases it may take more than 48 hours to restore service. By saving time on these emergency jobs the equipment pays for itself in short order. Meanwhile, it is available for routine maintenance, and there, too, it helps to get the work done faster than was previously possible.

Small leaks in a line are fixed immediately. If they are promptly detected and taken care of the repairs are usually of a minor nature. To spot these tell-tale leaks, Texas Eastern has its line patrolled twice a week by airplane, under contract. It's a one-man operation, conducted by a flier who lives in Monroe, La. He not only covers the system thoroughly but also has time on each eastern trip to go over some other natural-gas lines in the same general area. Because natural gas kills grass with which it comes in contact, a skilled observer, flying at a proper height, can locate even a relatively small leak by the surface discoloration it causes.

Thus far, the equipment at Eagle has been called into emergency service only once. That was last December, when a break occurred in one of the two 20-inch lines between Eagle and Station No. 26 at Lambertville, N. J. At the point of the failure the lines are 17 feet underground, this unusual depth being attributable to the fact that they pass under railroad tracks just before entering a hill As the gas was under 418 psi. pressure, that

which escaped expanded greatly and produced a refrigerating effect that froze the ground above it. Because of this circumstance, and because the trench in which the pipe was laid had been backfilled in part with rocks that were too large to be handled by the back-hoe digger brought to the scene, it was necessary to use paving breakers. These tools both loosened the frozen earth-and-rock mixture and also served to reduce the larger pieces of stone to sizes that could be readily removed.

Repairs were made by cutting out 3 feet of pipe and welding in a new section having three degrees of curvature. In order to do this, the 47-mile stretch of line between the Eagle and Lambertville stations was exhausted to atmospheric pressure by opening valves at those two points. To provide working room for the welders the bottom of the trench had to be belled out on both sides of the pipe. There, again, the paving breakers were brought into play. Customers eastward of the break, including those on Staten Island, suffered no interruption in service because the second 20-inch line could carry enough gas for their needs.

One of the routine maintenance jobs that has to be performed all along the system is the periodic cleaning of the inside surfaces of the pipes by running mechanical scrapers or "pigs" through them. A pig is a wire brush-rubber cup unit, 4 or 6 feet long, with two encircling bands of rubber at each end that are sized so as to fit rather snugly against the pipe. Around its forward end are wire brushes that sweep the walls as the so-called pig is pushed along under the pressure of the flowing gas. A scraper for a 20-inch line weighs about 500 pounds and one for a 24-inch line approximately 700 pounds. Although most of the gas goes through distillate or natural-gasoline plants before entering the system, some of it may contain condensable hydrocarbons. Minute quantities of oil are also picked up by the gas as it passes through the compressors in the booster stations and mixed with it. In time, accumulations are formed, usually at low points in the line.

These deposits, although small, will eventually reduce the carrying capacity of the system if they are not removed. By keeping a close check on the operating efficiency of the compressors at the various stations, it can readily be determined when any section needs cleaning. A pig is then inserted and run through. In order to do this while the line is under pressure, scraper pits are provided at each station.

A pig is put into and withdrawn from the section in somewhat the same manner men and materials are "locked" in and out of a tunnel driven under air pressure. A length of pipe, of the same size as the transmission main, extends from the latter into the scraper pit. On this link and near the junction is a valve that is normally closed. The scraper-pit end of the section is dead-ended by a steel plate that is secured to a flange on the pipe by heavy bolts and nuts. When a pig is to be inserted, the plate is removed, the pig put in, and the plate replaced. Then, by means of a connection near the dead end, gas bled from the transmission line is introduced behind the pig, the valve is opened, and the pig is pushed into the main. When it reaches the point where it is to be removed, the same operations are performed in reverse order. Pushing the accumulation it has gathered during its journey ahead of it, the pig is run into the scraper pit. The large nuts that hold the end plate were formerly run on and off by hand wrenches. Now that work is done much more quickly and with little muscular effort by means of an impact wrench. An accompanying picture shows the operation.

In addition to this cleaning service, pigs are run through the line after a break has been repaired to purge it of air that might form an explosive mixture with the gas. When a break occurs, the nearest valves, both upstream and downstream, are closed to isolate the section concerned. Other valves near the first ones are then opened to "blow down" the section—that is, to relieve the gas pressure. This facilitates making repairs and minimizes attendant hazards. Valves of both types are located on each side of every compressor station, as well as at some intermediate points. After repairs have been made, the upstream blow-down valve is closed, gas is again admitted to the section that was isolated, and a pig is inserted. Meanwhile, the blow-down valve at the downstream end is left open. When the pig reaches that point it is known that all the air has been expelled and that that particular stretch of the line is again filled with gas. Accordingly, the pig is removed, the blow-down valve is closed, the main flow valve is opened, and regular service is resumed.

It is of interest to note that a pig travels around 15 or 20 miles an hour when performing its normal cleaning job with the entire line under pressure. However, with a downstream blow-down valve open following a break and with the gas discharging against atmospheric pressure, a pig may attain a speed of 70 miles an hour or more if 60 or 70 pounds line operating pressure is admitted to the section being purged. As too much speed sets up friction that

SCRAPER-PIT OPERATIONS

Cylindrical scrapers or "pigs" are periodically run through the line to clean it and are put in and taken out in pits into which extends a dead-end spur from the main line. The end plate on the 20-inch segment shown at the left is secured by a ring of closely spaced 2 9/16-inch nuts on 1 5/8-inch bolts. Removal and replacement of these nuts by hand was formerly a laborious, time-consuming job. Now it is done in a few minutes with the aid of a Size 577 impact wrench, as illustrated. Above is pictured the forward end of a "pig" being withdrawn from a pipe section.

burns the rubber bearing rings on the pig, care is taken to control the volume of gas admitted so as to reduce the rate of travel to a safe limit.

Of further interest is the fact that pigs that become stuck can now be detected by pipe-line operators by the use of a uranium prospecting instrument that came into prominence as a result of the atomic-bomb development. By tagging the scraper with a small amount of uranium-bearing compound, it is possible to spot it quickly and definitely by walking along the line with a Geiger-Muller counter. Heretofore, a stuck pig was located by listening for the sound of gas pushing past it, and that sometimes proved to be a tedious and time-consuming task.

An important tool developed recently by the Mueller Company, of Decatur, Ill., for pipe-line work is a power-operated tapping machine that permits tapping a line under pressure with safety in making connections or installing valves. The unit shown in accompanying illustrations makes openings in pipe by removing circular sections from 2 to 12 inches in diameter and is powered by a compressed-air motor that turns its cutting head at about 30 rpm. The tap is made through a previously affixed valve, which can be closed as the head is retracted. The piece cut out, called a coupon, recedes into the head and is withdrawn with it. The tapping machine is held in working position by firmly bolting it to the valve flange, and an impact wrench saves considerable time and effort in running the nuts on and off. Texas Eastern maintenance men say that a tap that formerly required 45 minutes of handwork can be completed with the Mueller machine and an impact wrench in around twelve minutes.

Although the 3R-30 compressor used by Texas Eastern is new to the construction industry, it is well known to railway-maintenance-of-way forces. It was developed to furnish power for various track tools, especially tampers for working stone ballast underneath ties. It is the lightest and most compact unit available for this purpose and, consequently, can be easily moved about and spotted between tracks out of the way of passing trains. This last-mentioned feature led to its designation as the "Spot-Air" in railroad circles. The machine met the conditions for which it was designed so well that it was recently offered to the construction industry for services where ready portability and operating reliability are of first importance. Despite its small size, the unit contains high-grade materials and is constructed with the same care and accuracy as are larger compressors. As a result, it will stand up for a long time under hard service. Its design facilitates maintenance, for cylinder heads, valves, carburetor, and magneto are readily accessible for cleaning or adjustment.

Extreme compactness is obtained by mounting the unit's three gasoline-engine driving cylinders and its three compression cylinders radially around a vertical crankshaft. This arrangement conserves so much space that the complete machine, which delivers 30 cfm. of air at 80 psi. pressure, occupies a circular base only 26 inches in diameter and is only 28 inches high. It weighs approximately 250 pounds, and by slipping a removable horizontal lifting bar in place two men can lift and carry it. These features obviously represent real advantages in pipe-line service, where it is often necessary to move a compressor over rough terrain to reach off-road working sites.

The 3R-30's wheelbarrow mounting includes a pneumatic-tired wheel that enables one man to push the machine over uneven ground without great effort. Ordinarily, however, Texas Eastern dismounts the compressor and transports it in a Dodge Power Wagon, as accompanying pictures show. This vehicle can be driven over unimproved side roads or even through fields and usually gets to or closely approaches its destination. If a considerable distance remains to be covered, the compressor can be quickly remounted and wheeled along the cleared right of way to the scene of operations. Where the distance is short, as it generally is, it can be carried by two men after inserting the bar provided for the purpose.

Each maintenance headquarters has one of these Power Wagons, which has a winch and a gin-pole framework fabricated from pipe mounted on the front of it. The winch is standard equipment on the truck and is driven by power take-off from the engine. For handling heavy loads, a wire cable is run from it and reeved through a pulley on the outer end of the frame. When a job calls for the use of the Mueller tapping machine, the latter is ordinarily transported suspended from the gin poles. Upon reaching the working area it can then be lowered into operating position without further handling. All other necessary tools and a crew of three or more men are carried by the wagon.

Each crew based elsewhere than at headquarters locations has a pick-up truck to haul tools and men. As previously noted, such a crew will, when occasion demands, borrow a Power Wagon from its headquarters' unit, together with any additional tools or equipment that may be needed. When more air is required than one 3R-30 can furnish, an identical compressor can be obtained from an adjacent section of the line, or one of the two trailer-mounted 105-cfm. machines can be borrowed.

In the past, most maintenance work on natural gas pipe lines has been carried out with either electric- or hand-powered tools. Use of electric tools is limited to areas served by power lines and where no explosion hazard exists. Neither of these restrictions applies to air-powered tools to which, as well as to portable air compressors such as the 3R-30, no location is inaccessible regardless of the distance from a travelable road or the roughness of the ground to be covered. And they have a decided advantage over hand tools in their time- and labor saving potentialities.

RUNNING NUTS ON VALVE FLANGE

Here a Size 577 impact wrench is shown completing the job of running 2 5/16-inch nuts on 1½-inch bolts to hold a large valve on its flange. By using adapters, the wrench will handle nuts for bolts ranging in thread size from 1¼ to 4 inches. Compressed air for operating it is supplied in this case by a "Mobilair" trailer-mounted 105-cfm. compressor.

FLYING UNDER PRESSURE

HIGH-ALTITUDE TRAINING

The flight surgeons who examine prospective Army airmen and later watch their health closely during training are themselves given intensive instruction in every phase of high-altitude flying. By thus gaining intimate knowledge of the attendant physiological problems, they are better able to devise ways and means of combating them. The picture at the left shows aviation medical examiners learning about modern flying equipment during a simulated high-altitude flight in an oxygen chamber at the U. S. Air Force School of Aviation Medicine, Randolph Field, Texas. Below, an air crew is becoming familiar with oxygen apparatus in the Aero Medical Laboratory at Wright-Patterson Field, Ohio.

U. S. ARMY RECRUITING BUREAU PHOTOS

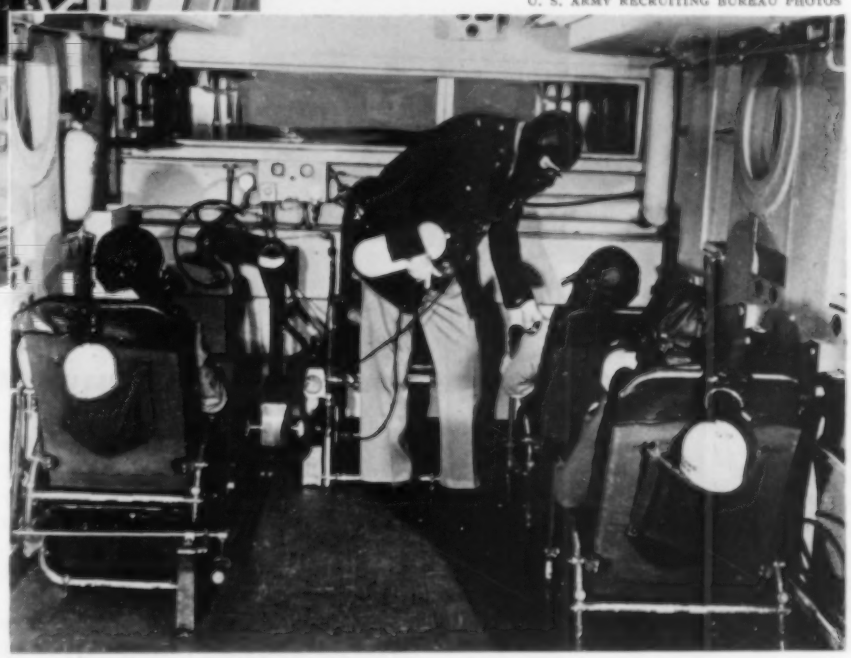

MAN was created to walk on the ground, to breathe rich air at near sea-level altitudes, and to move at rates of speed to which he could easily adapt himself. The airplane, which travels at speeds faster than sound, has taken men miles into rarefied atmospheres. The lack of oxygen at those altitudes, the forces and strains to which the human body is subjected at extremely high speed, the quick changes in temperature, and the mental strain under which pilot and crew live while aloft, have posed new medical problems.

When World War II began, the immediate problem was to find a means by which airplane personnel could be provided with sufficient oxygen when flying at high altitudes. At 10,000 feet, the first symptoms of a condition called anoxia—lack of oxygen—are experienced. Its onset is gradual and insidious, and the aviator feels exhilarated, as if he were capable of performing great deeds. Actually, his mental functions and the exercise of good judgment are already beginning to be impaired. At 18,000 feet, physical activity is greatly lessened, and at 20,000 feet useful consciousness lasts only fifteen minutes without artificially supplied oxygen.

The oxygen mask made it possible for men to take machines up to heights of 40,000 feet with safety and comparative comfort. At altitudes between 35,000 and 40,000 feet, a special mask and regulator that furnishes oxygen under pressure is adequate. But above 40,000 feet, it was determined that even 100 percent oxygen from a mask was insufficient because of the great drop in atmospheric pressure. However, medical research has discovered that oxygen can be satisfactorily inhaled if the atmospheric pressure within the cabin and cockpit is increased and that a flier is much more comfortable in consequence because of the greater equalization of pressure within and outside of his body.

At high elevations, temperatures drop to as low as 55 degrees below zero and crews are confined in small spaces where exercise and movement are either impossible or very limited. The clothing initially worn by airmen who ventured into those areas consisted of Artic-type fur-lined boots, parkas, and helmets and was found to be too bulky. Then an electrically heated flying suit was provided. Comparatively light in weight and comfortable, it retains its warmth for about two hours even if the wiring or electrical system in a plane should be rendered useless.

To combat "blackout" experienced by pilots when changing direction at high speeds, another type of suit was developed. The centrifugal force exerted by such a sudden change sends the blood from the head into the abdomen and legs, causing vision to fail (blackout). If the centrifugal force is not released the aviator collapses, a dangerous thing to happen in an airplane depending upon him for control. The blackout or "G suit" is simply a loose garment—coveralls—containing three bladders, two surrounding the legs and one around the abdomen. When inflated, they constrict the blood vessels, the blood stays in the head, and the dreaded blackout is prevented.

Although still in the developmental stage, experiments are being conducted with human volunteers and equipment by which a pilot can handle his ship while he is prone. That position enables him to be comfortable for up to eight hours of continuous flying. Especially built equipment give him the same control of his plane as when sitting, and the centrifugal force to which the body is subjected when prone is far less than it would otherwise be.

The foregoing material was condensed from an article, "That Men May Fly," in the magazine "Life of the Soldier and the Airman," published by the Recruiting Publicity Bureau, U. S. Army, Governors Island, N. Y.

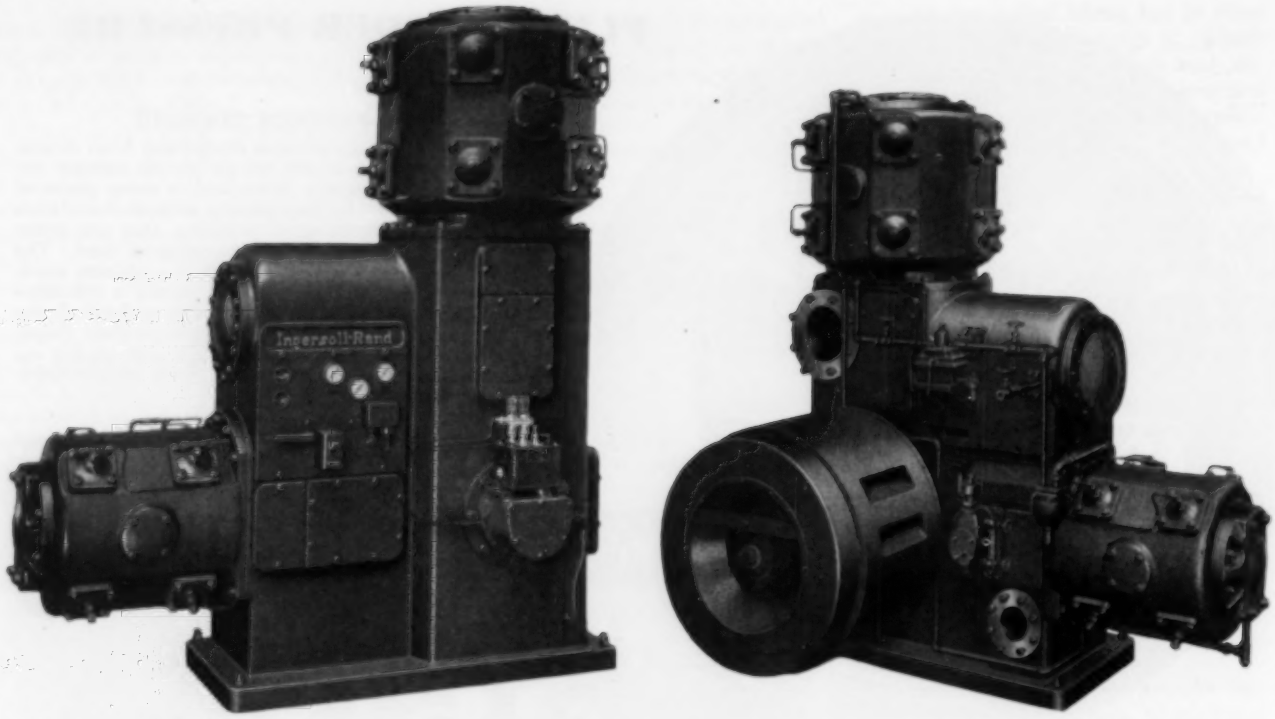

THE XLE SEEN FROM BOTH SIDES

New Compressor Presents Innovations in Design

A NEW line of stationary, electric-driven, 2-stage air compressors characterized by several innovations in design is announced by Ingersoll-Rand Company. Of "L" shape, with a vertical low-pressure cylinder, a horizontal high-pressure cylinder, and a synchronous driving motor mounted directly on the crankshaft, the new units are notable for their compactness and streamlined appearance. They are available in six sizes from 125 to 350 hp. for continuous, full-load compression to discharge air at pressures of 80-125 psi.

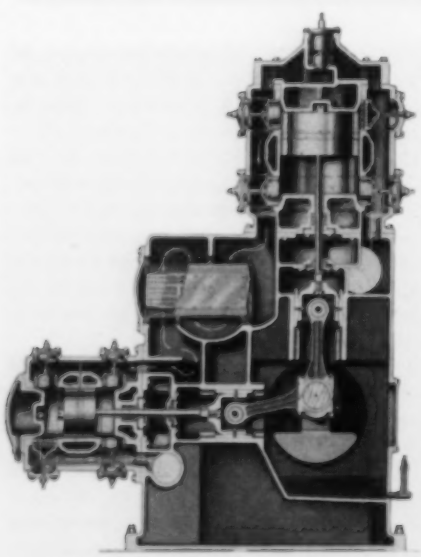

CROSS SECTION

Arrows show path the air travels from the vertical low-pressure cylinder downward through the intercooler at left-center and then into the horizontal high-pressure cylinder for the second stage of compression. This is the first compressor ever developed with a pipeless, through-frame air flow.

Designated as the XLE, the machines are of the completely packaged type that can be shipped fully assembled. The tube-and-fin intercooler of all-copper alloy is only a quarter the size of a conventional tube-nest cooler of equal capacity, and is built inside the compressor frame. This makes possible a pipeless, through-frame air flow that eliminates external piping and protrusions and permits true streamlining. Interstage pipe connections, with their attendant strain on cylinders, are absent.

In addition to producing a pleasing appearance, the design features make for sturdy construction and a compressor that is extra strong and rigid, easy to transport, set up, and keep clean. Being compact it also conserves floor space and lessens foundation requirements to a noteworthy degree. The 125-hp. size, which has a piston displacement of 800 cfm. and operates at 600 rpm., is 7 feet 4 inches long, 5 feet 6¼ inches wide (including motor), and 7 feet 3 inches high. It can be placed on a 1½-cubic-yard base. The 350-hp. machine, with a piston displacement of 2280 cfm. and a running speed of 450 rpm., is 10 feet 3 inches long, 7 feet 2 inches wide, and 11 feet 2 inches high, and needs not more than 6½ cubic yards for its foundation.

All bearings in the XLE are full-floating and rotate freely on both the bearing journal and within the rod or bearing housing. Main and crankpin bearings are of aluminum alloy. Combined with pressure lubrication in a sealed, dust-tight crankcase that does not have to be opened for bearing adjustment, the construction is said to result in cool-running bearings, long trouble-free service, and low maintenance cost. The compressor valves are a new design of the established channel type.

The XLE is normally shipped as a complete unit ready to run as soon as it is placed on its foundation and air, cooling-water, and electrical connections are made. Controls are simple and grouped for the convenience of the operator. Operating economy is effected at partial and full loads by means of a 5-step cylinder clearance control that has been used on I-R electric-driven compressors for 40 years.

Designed to answer the needs of heavy-duty service of all kinds, the new units are well adapted for use in factories, railroad shops, powerhouses, and mines, as well as on large construction jobs. They are especially suitable where floor or ground conditions require a well-balanced machine.

Additional information and descriptive literature may be obtained from Ingersoll-Rand Company, 11 Broadway, New York 4, or any of its branch offices.

This and That

Aid for French Africa

Development of French West Africa is being furthered with $31,000,000 in American goods and machinery allocated under the Marshall Plan. Highways and railroads are to be improved with the aid of $1,500,000 worth of our equipment. In the "dead" delta of the Niger River 200,000 acres will be planted to rice and irrigated with water diverted into canals by the Sansanding Dam on the Niger at Markala. Mechanical peanut pickers have been sent to the Senegal region where it is proposed to raise goobers on 80,000 acres to alleviate a shortage of cooking oils and oilcake cattle feed in France. Iron deposits are being opened up in the Conakry area and $160,000 worth of compressed-air equipment is being provided for the purpose of developing phosphate deposits.

★ ★ ★

Puzzling Aspects of Sound

Research in the field of noise reduction is bringing to light some peculiarities of sound that are puzzling investigators. For instance, the noise of crickets makes sufficient impression on the human ear to be disturbing but is not loud enough to register on most sound-measuring instruments. By the same token, there is no instrument that will distinguish between the playing of the same note on a Stradivarius and on a hillbilly's fiddle, although the human ear does so. The explanation is believed to lie in the fact that in both cases there is a tiny wavering of the sounds that gives them characteristics which the ear can detect but which instruments cannot measure. In consequence of these findings, according to Dr. R.O. Fehr, General Electric Company noise researcher, engineers are beginning to study sounds in terms of their changing quality as well as in terms of loudness and frequency. "This approach," he states, "promises new understanding of sound problems, and new advances in sound engineering should result."

★ ★ ★

Lake Shore Profits Pass $100,000,000

Lake Shore Mines, Limited, one of the principal gold-mining enterprises in Canada, passed a significant milestone in March. With the mailing midmonth of dividend checks, total payments to shareholders reached the hundred-million-dollar mark. During more than 31 years of continuous activity, the mine has produced in excess of $220,000,000 worth of gold. This was recovered by breaking, hoisting, and milling nearly 13,500,000 tons of ore. Operations to date have involved purchases of supplies and equipment costing more than $41,000,000. These included expenditures of $1,042,000 for rock drills and parts and slightly more than $3,000,000 for explosives.

★ ★ ★

Pneumatic Drill for Surgery

Although the first pneumatic tool of record was a small one devised by a British dentist for compacting metallic fillings in teeth, it failed to establish a trend. Instead, air-operated tools of larger sizes were put to immediate use principally in the metal-working industries. Such small tools as were developed were chiefly employed by the stone carver or cutter. In the main, however, the tools tended to grow bigger all the while, and some, such as impact wrenches, now weigh up to 70 pounds. With the advent of World War II, the needs of the airplane industry prompted the manufacture of small tools that could readily be operated by women. These have since been applied to the making of a wide range of products but are, for the most part, still working on or with metals.

Now, with the introduction of a small drill for the use of bone surgeons, we find pneumatic tools coming back to the field in which they originated. It has taken some 70 years to complete the circle. The new drill was recently demonstrated to members of the American Academy of Neurological Surgery. It is designed especially to assist in spinal-column operations. Its particular value lies in the fact that it permits performing extremely delicate bone surgery at a faster rate and greater safety than with instruments wielded by hand. It promises to be a boon in mastoid operations and in the bone work of orthopedic surgery.

The tool, which is capable of operating drills up to ¼-inch diameter, is powered by either compressed air or compressed nitrogen. The latter is used oftenest because it is readily available in steel bottles. A standard cylinder of nitrogen will run a tool for 22 minutes, which is reported to be long enough to do all the drilling necessary for five average operations.

To insure sterile propulsive gas, Prof. E.G.D. Murray of McGill University, Canada, developed a special filter that makes use of Pyrex-glass wool to capture dirt and germs. It was tested by blowing germ-laden peat dust through it at 100 psi. pressure for 30 minutes. Only that part of the wool with which the mixture first came in contact was found to be discolored and contaminated.

The tool will operate saws as well as drills, which may be run either in line with the tool or, by means of attachments, at right angles to it. A pistol-grip handle, ordinarily attached by a set screw, may be quickly removed when desired. Electric-driven tools have been used in surgery for some years, but they are objectionable in cases where combustible anaesthetics are employed. The new drill presents no such hazard.

With the aid of the pneumatic tool, sections of the vertebral bone structure at the back of a patient's neck were recently removed and the structure was then wired together. The operation required three hours, but would have taken almost twice as long without the surgical accessory.

★ ★ ★

Dry Air Thwarts Corrosion

Damage wrought by corrosion is heavy on tankships and increases when operations take the vessels into tropical areas where atmospheric humidity is high. Removal of rust alone costs from $5000 to $10,000 per tanker annually, and one American company estimates that it spends on an average $85,000 a year throughout the life of a ship to repair and replace bulkheads, piping, and strength members weakened by corrosion. Corrosion of tank interiors is aggravated by acids, sulphur, and other metal-attacking substances contained in all petroleums, especially if moist salt-laden air is present. Gasoline is even more corrosive than crude oil.

It is claimed that corrosion can be reduced as much as 80 percent by lowering the humidity inside tanks. To accomplish this, a machine called the Cargocaire has been developed to supply dry air to storage areas. The space above the liquid carried in tanks is maintained under slight pressure with desiccated air while in transit. This air drives out moist air and prevents more from entering. The system functions automatically by admitting additional air whenever the pressure drops to a predetermined point.

The tanker's piping system is also kept filled with dry air to prevent corrosion. After tanks have been emptied, they are charged with moisture-free air to protect them. This also forces out residue gases that might cause explosions. The Cargocaire can be operated in conjunction with flue-gas systems that are used to maintain tanks in a nonexplosive condition at all times.

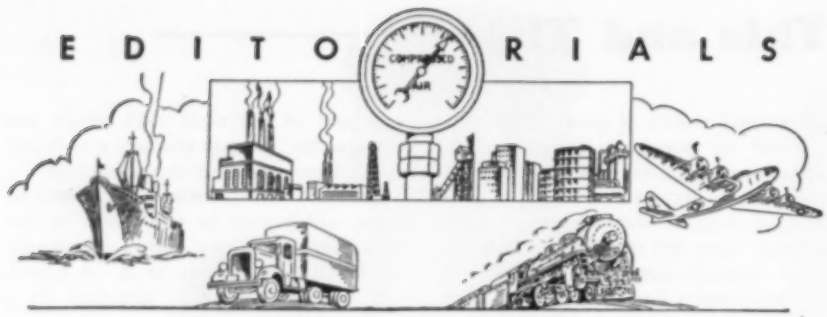

OUR PERIODICAL PURGE

PURSUING a long-established practice, COMPRESSED AIR MAGAZINE has recently completed checking its circulation list. As usual, this was done by mailing a questionnaire to each recipient of the magazine and, where necessary, a duplicate form as a follow-up. The primary purpose of the check is to verify names, addresses, and titles, and to remove from the list names of deceased persons and those who, because of retirement, change of position, etc., are no longer interested in reading the publication. Secondly, the object is to find out how readers like the magazine and to give them an opportunity to make suggestions for its improvement. We also ask how many individuals other than the recipient of record read each copy.

Our circulation list of more than 30,000 names is canvassed in this manner at intervals of approximately 24 months. Over the years an average of 85 percent of those queried have responded (85.4 percent in the case of the recent check). This is well above the usual response to questionnaires of this sort, according to authorities on such matters. The 15 percent who do not return the forms are checked by field representatives.

The check normally results in removing around fourteen percent of the names from the list. The saving effected by reducing publication and mailing charges just about equals the cost of conducting the survey. However, it assures us that we are sending the magazine to only those who want it and, consequently, are spending our production dollars effectively. In addition, it assures advertisers that they are getting full value for their expenditures for space. They know we have what the trade calls a "clean list." It is, in fact, so free from "deadwood" that experienced and investigation-minded advertising men rate our pages among the best in the technical publishing field in which to put their messages. Approximately 200 new names are normally added to the list monthly. Consequently, by the time the next check begins, our circulation will again be around 30,000.

We have used the same questionnaire for many years. It is as fair and unbiased as we can make it. Some periodicals that canvass their readers frame their queries so that they will produce the desired answers. The only place where readers can express opinions on the job we do is headed: "Suggestions for editors and advertisers." Respondents are free to criticize or praise, as they please. Obviously, a questionnaire that does not attempt to influence the replies in any way is the only kind that will obtain impartial and honest information. If a magazine seeks and gets facts by devious methods, it is only kidding itself. Furthermore, in presenting its so-called findings to prospective advertisers it is guilty of misleading them, to say the least. Fortunately, advertising managers and advertising agencies aren't easily beguiled. Biased surveys and questionnaires usually prove to be boomerangs for the publications that instigate them.

•

ROBOT COMPRESSOR STATIONS

AUTOMATIC or unattended compressor stations in oil and gas fields are becoming fairly common, and two recent articles in these pages have described specific installations. Although they are still so new that the operating data regarding them is not abundant, the evidence seems to indicate that they are highly successful. This is the conclusion reached by T. S. Bacon of the Lone Star Gas Company, Dallas, Tex., in a paper recounting his firm's experiences with them.

A Lone Star automatic station at Cayuga has operated 96.3 percent of the elapsed time since it went into service four years ago. Assuming that it is reasonable to allow 0.5 percent down time for maintenance of any internal-combustion engine, this performance is within 2.2 percent of the best that might be expected. The cost of this down time was actually considerably less than the sum that would have had to be paid out in wages if the plant had continual attendance.

Compressor stations in oil fields normally run 24 hours a day. At prevailing labor rates, the outlay for attendance of a station handling a million cubic feet of gas daily is about $12,000 a year. This amounts to a charge of three cents per 1000 cubic feet. Automatic operation will not eliminate all wages because some maintenance work must be done during the life of the station. However, it will generally result in worth-while savings, especially in the case of small stations.

In addition to reducing payrolls, automatic controls create more desirable operating conditions than are possible with human attendance. This is true, for instance, with respect to obtaining optimum temperatures of cylinder-jacket cooling water and of crankcase lubricating oil. Automatic devices will hold them closer to ideal conditions than will manual control. Moreover, automatic controls can do a better job than human supervision in the matter of making compressors respond quickly to load fluctuations.

The greatest disadvantage of automatic control so far revealed is that, without human attendance, there is a time lag in getting at the job of correcting conditions that cause a station to cease functioning. Maintenance work done on a regular and well-planned schedule will, however, substantially reduce down time by correcting causes of stoppages before they become acute. For example, Lone Star Gas has found that spark plugs in the power ends of gas engine-driven compressors should be replaced after they have operated 80 percent of their life expectancy. Following this policy, it makes a practice of renewing them every 90 to 125 days and has consequently experienced only one engine shutdown through spark-plug failure.

Pursuing the same line of preventive maintenance, the company checks each compressor unit every twelve months to determine the condition of all bearings, cylinders, and the cooling system. In this manner incipient troubles, that might arise from such things as corrosion, scale, and cylinder and ring wear, are for the most part nipped in the bud. Another conclusion reached by Lone Star is that pneumatic controls are more reliable than electrical controls and are easier to apply.

Mr. Bacon summed up his discussion with the prediction that automatic compressor stations are here to stay. "Present reliability of the mechanical equipment and of control equipment required in such stations is excellent and is improving from year to year," he stated. "Costs for maintaining constant human attention have increased very substantially during the past several years, and may or may not increase in the future. In any event, the present margin of savings in operating costs appears to justify the use of unattended stations in sizes up to at least 2000 hp., where infrequent shutdowns of the station are not too undesirable."

Coke Bed Fired Quickly with Electropneumatic Lighter

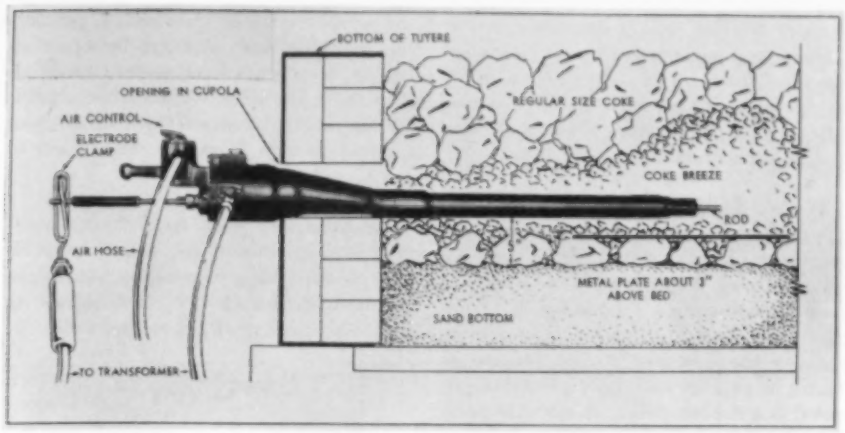

IN POSITION FOR USE

The Whiting-Mason Coke Igniter is introduced through the cupola breast or a special opening in the side or back and about 5 inches above the sand bottom. Before the electrode is inserted into the barrel, short blasts of compressed air are blown through the latter to make sure it is free of coke. Igniter is left in place for about 10 to 15 minutes. Then, if coke at right angles to the barrel is not red hot, the unit is withdrawn 8 to 10 inches. When the bed is in that condition throughout, the igniter is removed and regular charges of coke are started.

CLEAN, quick, and thorough cupola ignition and hot iron at the first tap are among the advantages claimed for a coke igniter built by Whiting Corporation for foundry use. The assembly is 45 inches long and consists essentially of an igniter body, a 1¾-inch barrel, an electrode holder, a vibrator tube, and a booster pipe. In operation the barrel, which is inserted into the coke breeze, serves as a ground to strike an arc within the coke bed. This is done by passing an electrode through the insulated tube or holder in the barrel and, at the same time, introducing sufficient compressed air to stimulate combustion. Current is provided by a transformer and compressed air is maintained at a pressure between 80-100 psi.

About twenty seconds after ignition, the vibrator tube containing the electrode holder is withdrawn and the booster pipe is inserted. Air is admitted to the latter through a separate hose connection; and this blast, together with the initial one, is continued as long as the igniter is in the cupola. It is claimed that a well-fused, deep coke bed is obtained within from 20 to 30 minutes without the disadvantages, primarily smoke, incident to the use of gas, oil, or wood and at a lower cost than by any other method. Two and even three units can be used with large-diameter cupolas that necessitate quick firing.

Air-Operated Machine Glues and Seals Cartons

WITH one stroke of a pneumatic cylinder, the Casealer, a recent development of Schroeder Machines Corporation, glues, folds, and seals packing cartons of a variety of sizes. There are two types: No. 100, in which the cartons are automatically stacked, positioned, and opened ready for packing by hand; and No. 300 into which the operator puts the cases, one after another, with the lower inside flaps tucked in and the bottom side flaps hanging down vertically, as shown in the accompanying illustration. This machine is 9 feet long and 20 inches wide and consists of a case-controlling magazine, a 1-gallon glue container, tubular applicators of stainless steel that are normally closed, and a compression unit.

When the carton has been filled, the top inside flaps are closed and held down by a folder. A trip lever then starts the machine, actuating a double-acting pneumatic cylinder that moves the package ahead and controls both the glue applicators and the compression unit. The former can be opened any desired degree by turning an air valve to regulate the pressure, thus varying the amount of adhesive applied on rough or smooth surfaces and with the top and bottom flaps in the vertical position. Next, the folding rods close the flaps; the air cylinder lifts the upper half of the compression unit and lowers it again to seal the carton after it has come to rest beneath it. Sealing normally takes one minute, and as the case moves forward, the one at the discharge end of the line is pushed onto a conveyor for delivery to storage or the shipping department.

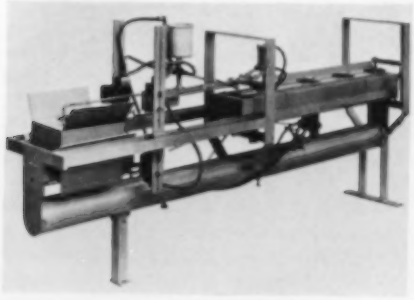

MANUALLY LOADED TYPE

This machine handles cartons from 7 to 16 inches wide, 3½ to 16 inches high, and 6 to 20 inches long, and has a capacity of approximately 300 an hour. It is operated with air at a pressure of 40 psi. and consumes 0.3 cubic feet per case. One double-acting air cylinder performs all the work normally done by chains, gears, cams, motors, and similar complicated mechanisms.

Special Jackhamer Mounting for Road-Widening Job

SOME of our state highway departments require that reinforcing be used to tie a new road slab into the existing one on all concrete-highway widening jobs. This means that the side face of the original slab must be drilled at 2-foot intervals with 1 1/16-inch holes 6 inches deep for the installation of a shield to hold the reinforcing bar. For every mile of road it is therefore necessary to put in 2640 holes. Doing this work with hand-held drills is awkward and slow and results in only 40 to 50 holes per machine per day.

One contractor in New York State has stepped up drilling progress tenfold by using the special drill mounting shown in the accompanying picture. It consists of a 5-inch steel channel attached to the side of a trailer carrying an Ingersoll-Rand 105-cfm. portable air compressor. The apparatus is arranged to hold a J-10 or J-30 Jackhamer in horizontal position and permits raising and lowering the tool so that adjustments for variations in slab thickness can be made. It has increased the daily drilling rate per machine to 400-500 holes.

Industrial Notes

What is described as the first electrical anemometer unaffected by temperature changes has been announced by the Hastings Instrument Company, Inc. Featuring a built-in temperature-compensating probe, the Model G Air-Meter is said to give instantaneous, direct, and accurate readings of air velocities from 5 to 6000 feet per minute, with an expanded scale in the low-velocity range. It is especially suitable for use in connection with process control, air conditioning, and research installations where quick readings are of importance. Separate probes can be obtained for ordinary Hastings anemometers, as well as accessories including a carrying case with a battery-operated power pack for service where 110-volt alternating-current is not available.

Impregnating nylon, cotton, rayon, and wool with aluminum flakes by a new process is said to make those materials warmer than they normally are. A rayon-satin lining, for example, will provide 12 percent more warmth when treated than when unprocessed, while a nylon seersucker cover will be superior in this respect to a 3½-pound wool blanket.

Canada's Roberval & Saguenay Railway has lately put in service a boxcar with an all-aluminum body which is believed to be the lightest of its size and type in existence. It weighs only 43,400 pounds, or about 6 tons less than the standard United States car of less capacity. Its first load of 2243 bushels of grain weighing 134,580 pounds was a record breaker.

For carrying coolants to welding heads, gas to soldering torches, and compressed air to pneumatic tools, General Motors Products of Canada, Ltd., has developed a vinyl-plastic hose of its own that is said to be superior in a number of respects to the conventional type. According to the company, it lasts four or five times longer, costs half as much, is more flexible, has a smoother inside surface, and permits the use of a smaller size for a given service. In the case of an air-operated impact wrench, for example, a 9/32-inch plastic hose takes the place of a ½-inch-diameter rubber hose.

W. W. Sly Manufacturing Company has designed a bench-type blasting machine for cleaning small parts that receives its air supply from a 5-hp., 2-stage compressor. Loading is done through a hinged top with a window that enables the operator to see the work, which he rotates with his right hand encased in a rubber glove. A side-mounted light facilitates vision. The unit has a ventilating fan that exhausts the dust into a filter bag.

For industries engaged in mass production there is now available a power screw driver recently announced by Shakeproof Inc., a division of Illinois Tool Works. It was designed in answer to the demand for a high-speed foolproof machine for use with the company's thread-cutting screws and "sems"—preassembled fastening units. Installation involves only plugging into a 110-volt outlet and connection with an air-supply line. Operator puts the screws into a hopper, spots parts to be tied together beneath the spindle, and drives the screws by depressing an air pedal. The hopper feed positions each one properly for its travel down a track to the bit, where it is held firmly until one or two threads are engaged. An automatic clutch disengages as soon as the desired torque is reached, thus preventing overtightening and breaking or scarring of the work. Another mechanism protects the machine from damage by enabling the operator to release a jam caused by a wrong-sized screw. Unit is adjustable for screws of virtually all types and styles ranging in size from No. 1x⅛ inch to ¼x¾ inch.

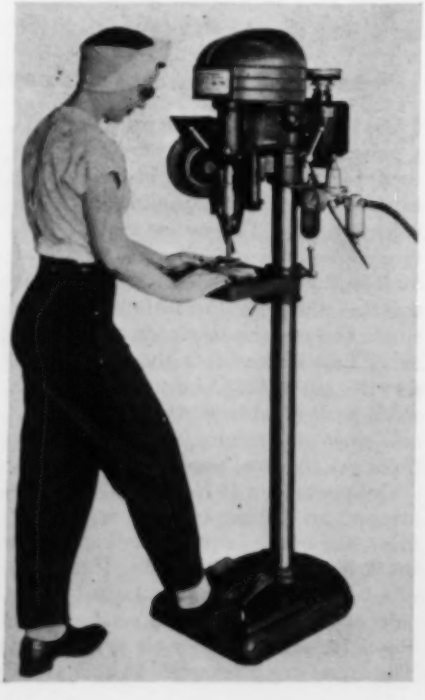

Another pneumatic strip-chart recorder has been added by Wheelco to its line of indicating, controlling, and registering instruments. It is designed to measure speed, flow, pressure, temperature, static grain loads, voltage (both alternating- and direct-current), amperes, etc., and is said to perform its control function with ease and accuracy by the smooth floating power of compressed air operating valves, dampers, levers, pistons, etc., through diaphragm motors. The instrument, known as the Pneumatic Capacilog, is self-contained and has only two external air connections.

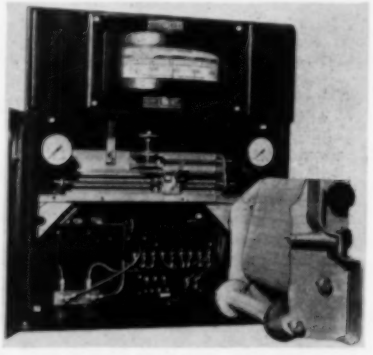

A metallic rod wiper for pneumatic and hydraulic cylinders has been introduced under the name of Seal-Guard by Hydraulic Accessories Company. It is made of two flexible bronze rings mounted in synthetic rubber and has knife-edge conical surfaces that protect the rod and packing by removing abrasive substances. The wiper is self-adjusting.

It is contradictory to use a welder to pull metal apart, but that is being done at the plant of the Ohmite Manufacturing Company in making harrow teeth. Formerly, a skilled hammer operator forged one at a time from steel bar stock. Today, a bar about 12 inches long is gripped between the terminals of a welder, current is applied, and the steel is allowed to become red hot. At that stage an air cylinder exerts a pull on the jaws, severing the bar and forming two harrow teeth ready for assembly.

As a supplement to conductive floors in munition and other plants where there is danger of explosions, Walter G. Legge Company has designed an antistatic device to be worn by workers. It consists of a retractable contact pin that is

clipped under the shoe and connected by a chain and spring to an adjustable garter. It is said to insure positive electric contact between the floor and the body and to drain off static charges despite the insulating effect of shoes and socks and deposits of wax or grease on the soles.

A cylinder and shaft seal of new design has been developed by The Auto-Diesel Piston Ring Company. Of all-alloy 3-piece construction, it is said to prevent or retard tarnish, rust, or other corrosion by contact with different hydraulic solutions and to eliminate "blow-by"—leakage of air, gas, or liquid past a piston

ring or similar circular part and through the step, insert, or split in the ring by which it is expanded for installation in the piston groove or in the retaining groove around a shaft. The seal has one inner ring with two extremely close-fitting outer rings, the steps in the former being staggered so that blow-by, even after much wear, is avoided in most cases.

Oil-well drillers are experimenting in a California field with a sonic pump to bring crude oil to the surface. According to the American Petroleum Institute, the sound waves cause the drill tube to contract and expand sufficiently to lift the fluid from the depths.

"Automation" is a word recently coined by industry to define the process of converting a hand to an automatic operation for the dual purpose of reducing cost and physical effort on the part of the worker. It is used a number of times in the preliminary program of the convention of the American Society of Tool Engineers to be held on April 10 in Philadelphia, Pa.

Kinsalloy is the name of a new alloy that is said to resist the searing heat of a jet engine. It was produced by Harold V. Kinsey, a metallurgist of the Canadian Bureau of Mines, and is 10 percent lighter than similar metals. Tests have proved that it can withstand a temperature of 2100°F. for as long as 1000 hours while subjected to a heavy load.

For use with its own materials-handling equipment but also generally available, Lyon-Raymond Corporation has designed an air-operated hydraulic pump of the single-acting type. It develops a working pressure of 1000 psi. with air at



90 psi., and pumps oil at the rate of 1 to 1½ gpm. A foot-controlled reciprocating valve alternately diverts the air from one to the other side of a pneumatic piston, which is direct connected to a small hydraulic cylinder. The pressurized oil in the latter is returned to the reservoir by gravity through the medium of a release valve actuated by a 3-position, 4-way foot valve that also controls the pumping action. Units with higher working pressures and reservoirs of several styles and

DRI AIR MAY BE INSTALLED BY SUSPENDING IT FROM THE PIPING WITHOUT ANY OTHER SUPPORT.

INCREASED PNEUMATIC EFFICIENCY WITH THIS AUTOMATIC SEPARATOR

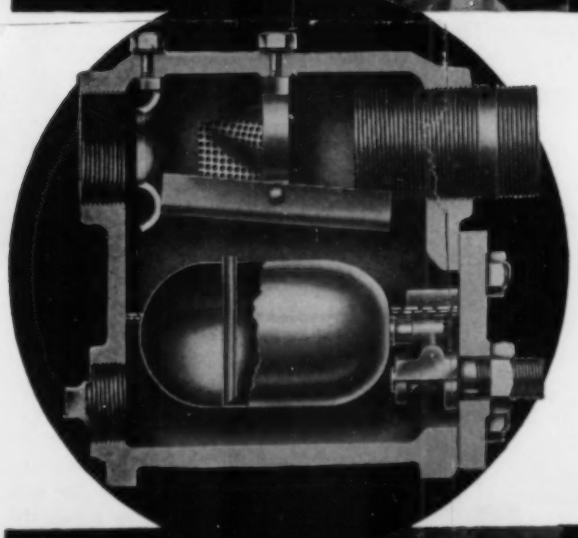

PROTECT EQUIPMENT WITH

DRIAIR

SEPARATES • COLLECTS • DELIVERS

• DriAir separates and automatically ejects the condensed water and oil from compressed air lines, collects pipe scale and rust, delivers clean dry air to tools and other pneumatic equipment. This promotes better lubrication, reduces wear, increases life of tools and produces greater output. All internal parts are made of bronze or copper—resistant to corrosion and practically permanent.

A TYPICAL INSTALLATION SHOWING DRI AIR STANDING ON A CONCRETE FLOOR NEXT TO THE WALL.

WRITE FOR BULLETIN DA WHICH FULLY DESCRIBES THE CONSTRUCTION AND OPERATION OF THE DRIAIR.

NEW JERSEY METER CO.

"SPECIALISTS IN COMPRESSED AIR DEVICES"

PLAINFIELD, NEW JERSEY

9 STORIES UP!

...A NEW RECORD FOR PUMPING CONCRETE

● *Powered by its Waukesha Engine,* a Rex 160 Pumpcrete recently broke all records in Milwaukee for concrete elevation and placement for this size concrete pump.

The concrete was lifted to 160 ft., nine stories from the ground to a roof pouring job on a brew house addition of Schlitz Brewing Co. Total pour, 5000 yds. with Waukesha power pushing it through the 6-in. pipe at an average of 18 cu. yds. per hour.

Contractors Edward Steigerwald & Sons, Inc., own and operate the Pumpcrete which was purchased from Hunter Tractor & Machinery Co., Milwaukee.

On every general construction job—Waukesha Industrial Power Units, 5 hp. to 475 hp., gasoline, gas, and Diesel.

WAUKESHA MOTOR COMPANY
WAUKESHA, WISCONSIN
New York • Tulsa • Los Angeles

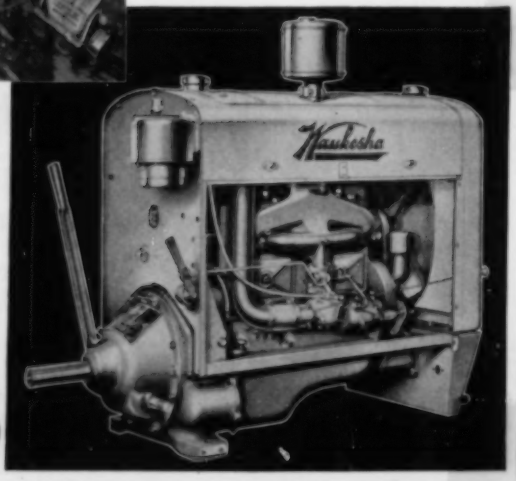

WAUKESHA Model XAHU—Gasoline Power Unit
powers the 160 Pumpcrete, 4-cyl., 3⅜-in. x 4½-in., 186 cu. in. displacement; 43 hp. max. at 2000 rpm.
Get Bulletin 1408.



WAUKESHA POWER

sizes are obtainable and are intended for use with hydraulic elevating tables, strip and sheet feeders, and with positioners.

Exposed steelwork that forms part of industrial installations such as are found in oil refineries and chemical plants is sometimes irreparably warped in a fire. We are informed that a layer of a special cement 1¾ inches thick will retard the harmful effects of intense heat for three hours. The protective material, a gray powder, is made by Eagle Picher Company. Mixed with water it forms a stiff paste and is troweled onto ribbed metal lath wrapped around the steel members.

For the convenience of plant maintenance men, A. Schrader's Son Division of Scovill Manufacturing Company, Inc., is offering a sturdy, lightweight crimping tool for servicing hose. It is in the form of a pair of pliers and uses two strands of

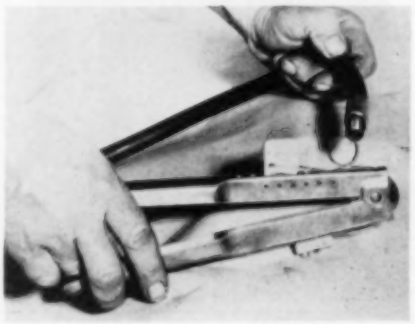

looped music wire as the crimping medium. They are attached to the handles in such a way that closing the latter contracts the loops into which the hose has been inserted. Loops can be made for repairing or installing hose from ½ inch to 1½ inches, outside diameter.

Plants that use many files may be interested in a report by Westinghouse Electric Corporation based on tests to determine whether or not it pays to resharpen them. It was discovered that proper care and maintenance, involving either sandblasting or return to the maker for recutting, does effect worthwhile savings. A 6-inch file that cost 25 cents when new was reconditioned by the manufacturer for thirteen cents and restored to service by the sandblast method for 0.052 cent, including sorting, oiling, and wrapping. In the case of a file 16 inches long the figures were as follows: new $1.05; recut, 0.53 cent; and sandblasted, 0.129 cent. A file that is only partly worn and otherwise fit for use can be restored two or three times by sandblasting. Its service life between resharpenings, as compared with that of a new file, averages 85 percent. Files that are worn smooth, and sometimes those that have been sandblasted more than once, have to be sent away for recutting and will be as good as new.

New Books and Industrial Literature

Hydraulic Institute, 90 West Street, New York 6, N. Y., has published Volume II of *Engineering Papers of Hydraulic Institute*. It contains the following technical papers which won awards in various engineering contests sponsored by the Institute to stimulate interest in the many phases of the pump industry: *Cavitation in Centrifugal Pumps*, by A. J. Stepanoff; *The Centrifugal Pump in the Process Industries*, by A. T. Nielsen; *The Operation of Centrifugal Boiler Feed Pumps*, by Hans Gartmann; and *Submergence for Centrifugal Condensate Pumps*, by Hollis T. Waldo. Price of book, $2.00.

The fifth edition of the Bureau of Reclamation's *Concrete Manual* is now obtainable. Prepared by engineers of the Bureau's branch of Design and Construction, the publication has 489 pages and 167 illustrations. It is of handy pocket size. New sections include one on the subject of air entrainment and another on the use and occurrence of pozzolana and its effect on concrete. Copies can be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D. C. Price $1.75.

Bulletin No. DB-2 of Mine Safety Appliances Company, Pittsburgh 8, Pa., describes its improved type of carbon-monoxide detector and recorder. Capable of continuously measuring very low concentrations of carbon monoxide in air, the instrument also operates warning signals, ventilation controls, or proportioning valves.

A 32-page catalogue describing clips, clamps, and brackets made by Thomas Associates, 4607 Alger Street, Los Angeles 39, Calif., is available upon request. It covers more than 12,000 sizes and combinations of standard bare-metal and cushioned line-support clamps and blocks, gives their special features, and suggests applications.

Marine and Industrial Products Company, 3731 Filbert Street, Philadelphia 4, Pa., will send to heating and power-piping engineers a bulletin that will help them select the correct size of safety valve for a given pressure-reducing regulator. Booklet contains test data and charts, together with capacity tables and other information on the firm's line of safety valves. Request should be written on company letterhead.

Engineers and others laying out air circuits may find helpful information in a 16-page catalogue on the full line of Gerotor double-acting, nonrotating air cylinders made by Rivett Lathe & Grinder, Inc., Brighton 35, Boston, Mass. The publication contains drawings and tables of dimensions for each model and size, descriptions of cylinder mountings, and recommendations as to the type of valve best suited for a particular application.

Rubber-lined pipe for corrosive, abrasive, or contaminating liquids, as well as those that tend to build up flow-restricting deposits, is described in Bulletin No. 6907 obtainable from the Rubber Division of Raybestos-Manhattan, Inc., Passaic, N. J. It is especially recommended for water-conditioning systems, sewage disposal, mine drainage, and for use in chemical, textile, paper, metal-refining, glass, and food-preparation plants.

A compound for use in cold drawing hot- or cold-rolled steel bars or rods is the subject

PERFORMANCE
That Rates
an "Oscar" on
Construction Jobs

Naylor light-weight pipe has earned "top billing" for performance in many theatres of operation in the construction field.

While light in weight, Naylor Pipe is built with exclusive strength and safety features that permit broad application not possible with ordinary lightweight pipe.

Whether it's pipe lines for high and low pressure air or water, push-pull ventilating, de-watering and drainage, dredging, hydraulic sluicing, sand and gravel conveying or other service, it will pay you to take advantage of the extra utility provided by Naylor light-weight pipe.

Sizes from 4" to 30" in diameter and thicknesses from 14 to 7 gauge. Write for Catalog No. 44 for full details.



NAYLOR PIPE COMPANY
1245 East 92nd Street, Chicago 19, Illinois
New York Office: 350 Madison Avenue, New York 17, N. Y.

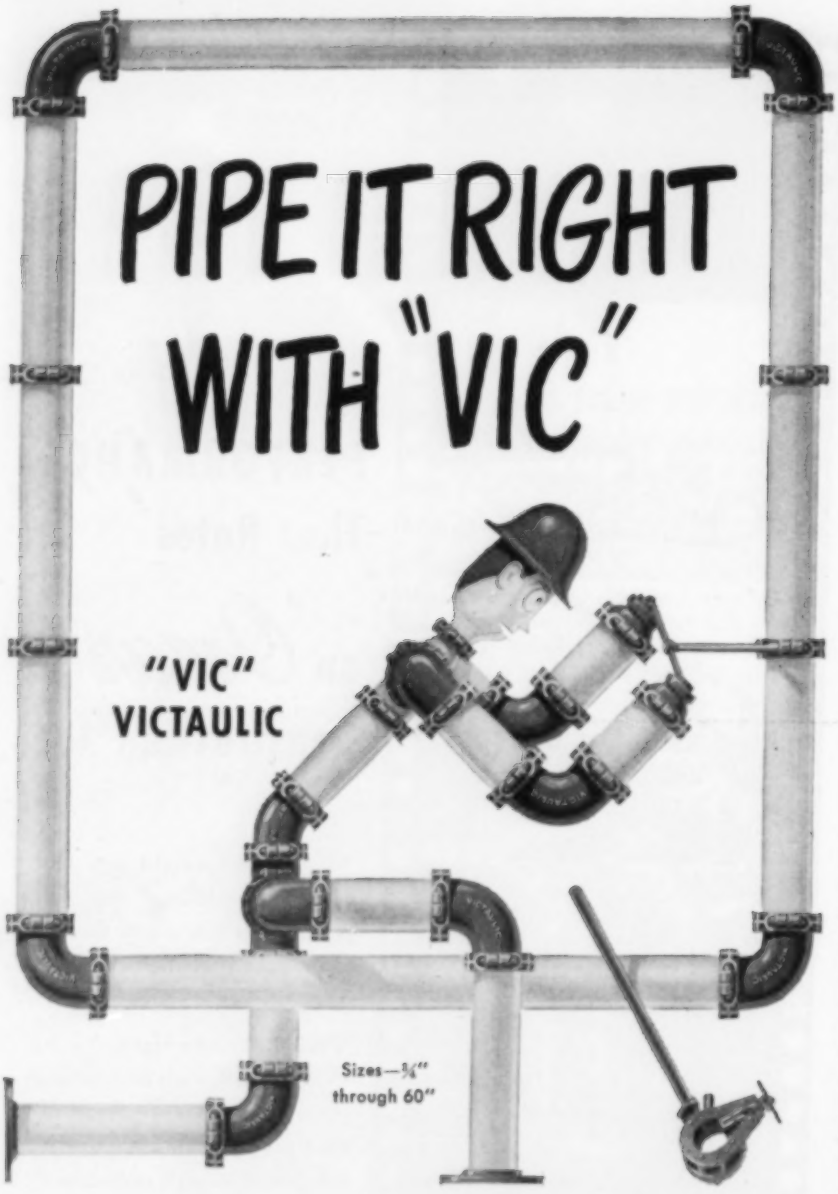

For the RIGHT solution to the toughest piping jobs...you just can't beat VICTAULIC Couplings and Victaulic Full-Flow Elbows, Tees and other Fittings.

AND you save plenty of time, work, dollars when you pipe with "Vic." The COMPLETE Victaulic Line assures you efficient, dependable piping construction. Simple two-bolt design gives quick, easy hook-ups, and a standard T-wrench is the only tool needed. "Vic" joints are made to "take it," they'll stand up under extreme pressure, vacuum or strain conditions and remain positive locked, leak-proof!

The Victaulic Way makes fitting those pipe ends easy..."Vic-Groover" grooves 'em automatically in half the time of a conventional pipe threader!

Make your next piping job ALL-VICTAULIC—*the easiest way to make ends meet.*

Write today for these two: Victaulic Catalog and Engineering Manual No. 44, "Vic-Groover" Catalog No. VG-47.

VICTAULIC COMPANY OF AMERICA
30 Rockefeller Plaza, New York 20, N. Y.

Victaulic Inc., 727 W. 7th St., Los Angeles 14, Calif.
Victaulic Company of Canada, Ltd., 200 Bay Street, Toronto 1
For Export outside U.S. & Canada: PIPECO Couplings & Fittings; Pipe Couplings, Inc., 30 Rockefeller Plaza, New York 20, N.Y.

26TH VICTAULIC YEAR

Copyright 1950, by Victaulic Co. of America

The easiest way to make ends meet
VICTAULIC
PIPE COUPLINGS AND FITTINGS

of a data sheet offered by E. F. Houghton & Company, 303 West Lehigh Avenue, Philadelphia 33, Pa. A heavy paste, it combines high-melting-point waxes and fats with a colloidal pigment. Parts are immersed in a solution of the compound and are ready to be drawn after draining and drying. It serves as a substitute for the liming process.

Instruments for measuring and regulating fluid density and specific gravity in industrial manufacturing processes are illustrated and described in Catalogue 76 issued by Fischer & Porter Company. Among the new designs available are submerged float instruments for use in vessels under pressure or vacuum, open bubblers, and closed diaphragm and hydrometer types. The publication will be sent upon request to the company at County Line Road, Hatboro, Pa.

Special shapes of stainless-steel wire, rod, and strip metal are described in a technical data sheet issued by Alloy Metal Wire Company, Inc., Prospect Park, Pa. Intended for purchasing agents, estimators, engineers, and research and production men, it shows how such stock can be used to eliminate many of the machining operations otherwise necessary in manufacturing processes. A large variety of shapes are available and most of them can be supplied in coil form or in straightened and cut lengths.

Hunter Spring Company, 1 Spring Avenue, Lansdale, Pa., has issued a bulletin—No. 310-1C—describing an unusual type of clamp for industrial use. It is in the form of the Hunter Neg'ator which, according to the company was the first elastic member ever to exhibit negative or constant force-deflection characteristics. Among the distinctive properties of the new clamp are: constant pressure regardless of thickness of work, automatic take-up, and great extensibility and flexibility. The bulletin pictures applications and gives design data.

Arthur D. Little, Inc., a research firm, has published an informative booklet on the services its engineers and chemists, professionally trained in economic appraisal, can render businessmen faced with policy decisions. It tells how its staff can help executives who are faced with such problems as diversification and growth, marketing effectiveness, product acceptance, selecting plant sites, revitalizing product lines, appraising trends, etc. A copy can be obtained from the company at 30 Memorial Drive, Cambridge 42, Mass.

Black, Sivalls & Bryson, Inc., 720 Delaware Street, Kansas City 6, Mo., will send to interested persons a copy of a catalogue describing chemical feeders designed for industrial processes that call for small and precise quantities of chemicals. Originally designed for pumping emulsion-breaking chemicals into crude oils, the units are now being used for such purposes as feeding anti-freeze or water solvents into gas lines and injecting chemicals into boiler-feed water. Entirely automatic, they are operated with compressed air or gas at 25 to 1000 psi.

High-speed synchronous motors and generators are covered in two bulletins obtainable from General Electric Company, Schenectady 5, N. Y. GEA-5415 deals with generators rated at from 12½ to 1250 kva. and operating at speeds from 1800 to 514 rpm. They are suitable for standby service or as portable prime sources of power in widespread fields of application. GEA-5426 describes 2- and 3-phase 60 cycle motors of 20 to 1500 hp. at 1800 rpm., as well as proportional horsepower ratings for slower speeds down through 514 rpm.

Your air compressor can't help pumping water

. . . but you can keep that water out of your air-operated equipment

Prolong the life of pneumatic tools and air lines . . . improve operation of air-operated instruments . . .

Dry your compressed air with Cuno MICRO-KLEAN Air Line Filters.

It's a fact—for every 1000 feet of free air per minute your compressor delivers, it also pumps an average of 70 to 80 gallons of water vapor every 8-hour day.

That's why many manufacturers of air-operated products install Cuno MICRO-KLEAN as standard equipment.

It Gets Out All The Moisture—Dirt, too

MICRO-KLEAN removes *all* entrained moisture together with all foreign particles—dirt, pipe scale, etc.—down to 1 micron size.

Double dirt capacity—due to an exclusive construction feature—means half the cartridge replacement cost is saved. Resinous impregnation and polymerization eliminates "wicking" and strengthens the cartridge, preventing channeling.

Air passing into filter hits baffle, which deflects some moisture down outside cartridge. Any moisture remaining . . .

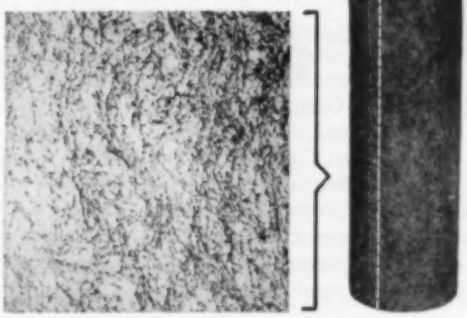

enters cartridge where it must work its way through a network of tiny interstices, making hundreds of sharp turns and impinging, sooner or later, on non-wicking fibres. Then it drains into the extra-large collection chamber.

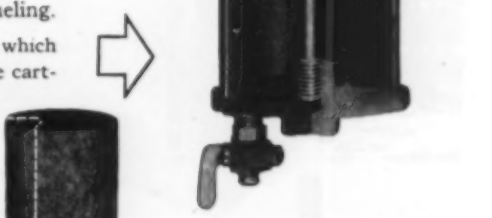

No Fluid Is Better than Its Filtration

CUNO

Complete Line

Fluid Conditioning

Removes More Sizes of Solids from More Types of Fluids

MICRONIC (Micro-Klean) • DISC-TYPE (Auto-Klean)
WIRE-WOUND (Flo-Klean)

Find out how little it costs to MICRO-KLEAN Your Compressed Air

- ☐ Air Hoists
- ☐ Pneumatic Tools
- ☐ Sand Blast Equipment
- ☐ Spray Paint Lines
- ☐ Air Guns
- ☐ Racking and Bottling Equipment
- ☐ Air Operated Temperature and Pressure Instruments
- ☐ Air Operated Vulcanizing Changers
- ☐ Air Operated Presses
- ☐ Air Brake Systems
- ☐ Compressor Suction Unloaders
- ☐ Air Operated Cotton Pickers
- ☐ Air Operated Glass Blowing Equipment
- ☐ Air Operations for cleaning and testing rubber goods
- ☐ Air Operated Elevator Doors

Any other compressed air service.....

Any other gas.....

CUNO ENGINEERING CORPORATION
1719 South Vine Street, Meriden, Conn.

Please send me a free copy of your MICRO-KLEAN Air Line Filter Bulletin. I am especially interested in the services checked.

Name.....Title.....

Company.....

Address.....

City.....State.....

PLEASE ATTACH COUPON TO YOUR BUSINESS LETTERHEAD

A SYMBOL OF SERVICE TO CANADIAN INDUSTRY

For nearly seventy years, Canadian-built Ingersoll-Rand equipment has aided in the development of Canada's natural resources.

During these years we have been privileged to work with many American business pioneers whose progressive leadership and technical skill, contributed much to Canada's growth.

Established in Canada in 1882 and starting with the manufacture of air compressors, rock drills, hoists and pumps for Canada's first mines, mills, railways and canals, Canadian Ingersoll-Rand now builds a wide range of equipment to meet Canada's varied industrial needs.

Today we offer to all who are interested in the continued development of Canada's resources, the services of our engineering and manufacturing works in Sherbrooke, Quebec, and a coast-to-coast field organization. Our engineers will be glad to assist your technical staff or consultants in the application and installation of equipment to meet your Canadian requirements.





MANUFACTURED IN CANADA BY CANADIAN INGERSOLL-RAND

- Barometric and Surface Type Condensers
- Water Vapour Refrigeration Units
- Stationary and Portable Air Compressors
- Ammonia Compressors
- Gas Compressors and Vacuum Pumps
- Aftercoolers and Air Receivers
- "Cameron" Centrifugal Pumps
- Air and Electric Tools
- Equipment for Petroleum Development and Refining
- Rock Drills and Coal Cutters
- Air, Steam and Electric Mine Hoists
- Barking Drums and Hydraulic Barkers
- Jonsson Pulp Screens
- Bird Paper Screens
- Save-Alls, Dirtecs
- Consistency Regulators
- Shower Pipes
- Vickery Felt Conditioners and Doctors

Canadian Ingersoll-Rand Company Limited

HEAD OFFICE: MONTREAL, QUE. ..... WORKS: SHERBROOKE, QUE.

BRANCH OFFICES: SYDNEY, SHERBROOKE, MONTREAL, TORONTO, KIRKLAND LAKE, TIMMINS, WINNIPEG, CALGARY, NELSON, VANCOUVER

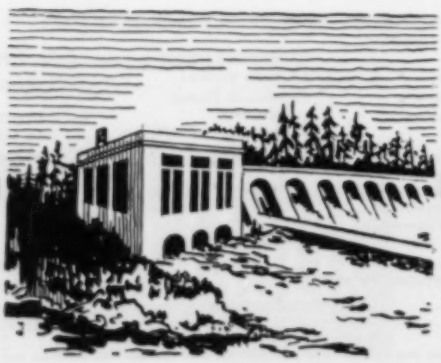

One for every place . . .

and one place to get them all



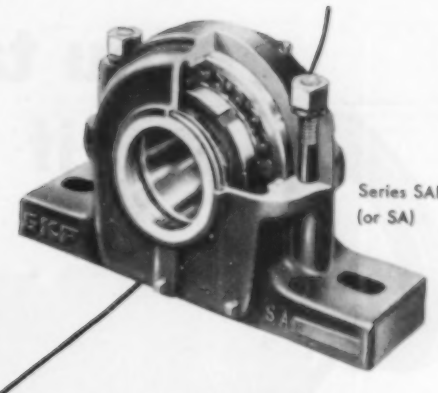





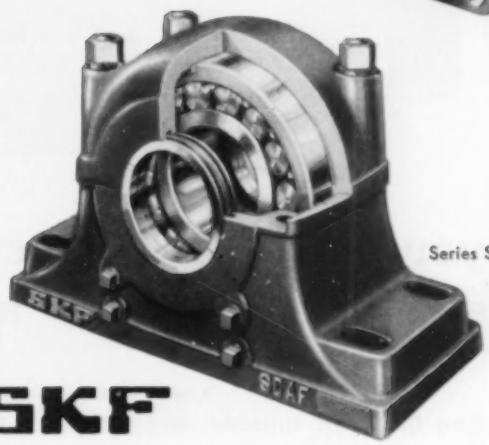

PILLOW BLOCKS ENGINEERED BY SKF

Specify pillow blocks and flanged mountings by SKF and you get bearings and housings engineered as a unit. What does this mean to you?

It means you get the full benefit of SKF's skill and precision methods of manufacture. It means you're sure of minimum friction and trouble-free, low-cost operation. It means efficient seals that retain lubricant . . . keep out dust and abrasive elements. It means minimum maintenance . . . maximum efficiency.

SKF supplies 5 basic types of pillow blocks for shafts from ½-inch to over 9-inches . . . and 2 basic types of flanged mountings for shafts from ½-inch to 2 7/16-inches. Whether you need Series SES for lightly loaded applications or Series SDAF to withstand unusual shock and heavy thrust loads . . . or any intermediate type . . . there's an SKF pillow block that's exactly right for the job.

Check your SKF Distributor, he has a stock of these pillow blocks and flanged mountings to meet *all* your requirements. SKF *Industries, Inc., Philadelphia 32, Pa.* 7044

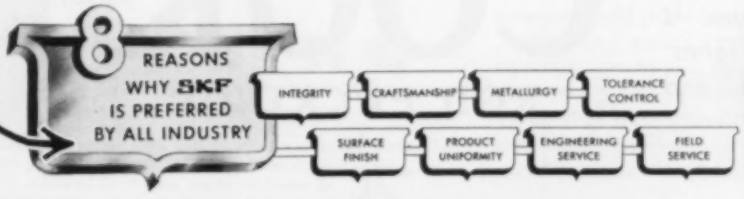

SKF
PILLOW BLOCKS

Pioneers of the Deep Groove Ball Bearing—
Spherical Roller Bearing—Self-Aligning Ball Bearing

You take no chances ... if it's COOKROC

. . . you get the correct material, precision manufacture and results

Selecting the most suitable ring material for a particular gas condition will always be a big problem for compressor operators. The point is, there is no single foolproof formula for every condition encountered.

Because of this, Cook has developed a wide range of ferrous, non-ferrous and non-metallic materials from which to select.

Take COOKROC. This laminated Bakelite base material is compounded especially for compressors handling gases carrying a high H_2S concentration, or gases laden with hydro-carbon vapors. It comes in several forms: Standard, Graphitized and High Temp. Standard size rings, stocked at Cook's plant in Louisville and its agents' Mid-Continent and California warehouses, are subject to immediate shipment.

For full information contact the Cook office nearest you.

C. Lee Cook Mfg. Co., Incorporated, Louisville, Kentucky. Branch offices in Baltimore, Boston, Chicago, Cleveland, Houston, Los Angeles, Mobile, New Orleans, New York, San Francisco and Tulsa.

COOK

ROD PACKINGS



. . . SEALING PRESSURES SINCE 1888 . . .

In strip mining, for shovel hoist and draglines, Roebling Preformed "Blue Center" Wire Rope with Independent Wire Rope Core is outstanding for small and medium size equipment . . . often preferred for 20- to 40-yard machines.

For rope research and developments that help you save...

Today it's Roebling!

YEAR BY YEAR, industry makes new and more stringent demands upon wire rope . . . and Roebling leads in developing types that meet these demands with utmost efficiency and economy.

Take Roebling Preformed "Blue Center" Wire Rope with Independent Wire Rope Core!

No finer rope has ever been made, and its basis is "Blue Center" steel—an exclusive Roebling development. Its high resistance to abrasion, shock and fatigue spells long life . . . To this, Roebling *Preforming* brings the further advantages of new handling ease and improved performance . . . And the addition of I.W.R.C. assures top resistance to operating pressures and provides increased rope strength.

Roebling makes a wire rope of the right construction, grade and size for every type and make of rope-rigged equipment. Have your Roebling Field Man recommend the best rope for low-cost performance on each of your installations.

ROEBLING

A CENTURY OF CONFIDENCE

Atlanta, 934 Avon Ave. ★ *Boston*, 51 Sleeper St. ★ *Chicago*, 5525 W. Roosevelt Road ★ *Cincinnati*, 3253 Fredonia Ave. ★ *Cleveland*, 701 St. Clair Ave., N. E. ★ *Denver*, 4801 Jackson St. ★ *Houston*, 6216 Navigation Blvd. ★ *Los Angeles*, 216 S. Alameda St. ★ *New York*, 19 Rector St. ★ *Philadelphia*, 12 S. Twelfth St. ★ *Portland*, 1032 N. W. 14th Ave. ★ *San Francisco*, 1740 Seventeenth St. ★ *Seattle*, 900 First Avenue S.

JOHN A. ROEBLING'S SONS COMPANY, TRENTON 2, NEW JERSEY

For High-Pressure Applications in Refineries and Industrial Processes

Here are 3 Reasons why you should specify I-R Vertical Process Pumps

- ***They're easy to install***
- ***Easy to maintain***
- ***Provide better operation***

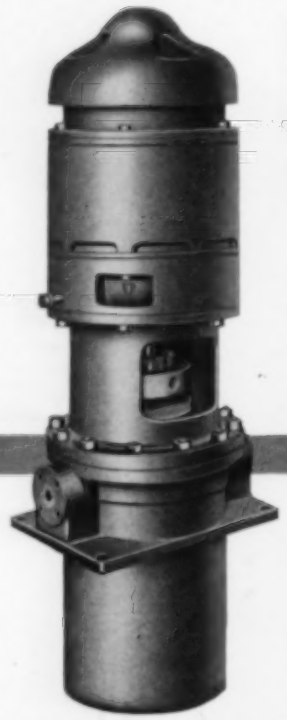

Ingersoll-Rand Class VP Pumps are vertical, multi-stage, diffusor-type units with single-suction impellers. They are made with 3, 4, 5 or 6 stages, depending on the operating conditions for which the pump will be used. Capacities range from 10 to 400 gpm . . . pressure to 750 psi.

They're easy to maintain because —

- The inner assembly can be pulled directly out of the casing without disturbing the discharge and suction piping
- There is only one stuffing box—and it is under suction pressure
- Bearings are lubricated by the liquid being pumped—No external lubrication piping
- Fewer spare parts—all the impellers and diffusors are interchangeable

They provide better operation because —

- Diffusor-type construction eliminates radial thrust
- The first-stage impeller is located on the bottom—Extra NPSH is therefore obtained
- High pressure breakdown above the last stage impeller balances pump thrust

An Ingersoll-Rand engineer will be glad to tell you more about Class VP Pumps. Ask for your copy of Form 7145-A.

They're easy to install because —

- No bedplate or grouting is required
- A minimum of floor space is needed—only 4 sq. ft. for the largest unit
- Simplified, straight through piping—no loops —no elbows

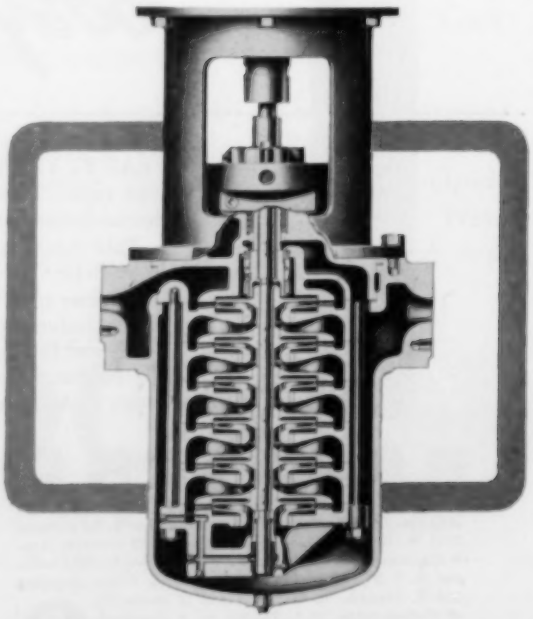

Ingersoll-Rand

Cameron Pump Division

11 Broadway, New York 4, N. Y.

434-10

ONLY THE BEST STEEL PRODUCES OUTSTANDING FORGINGS

For over twenty years all forgings produced at National Forge have been made from basic electric steel; in fact, we were first to produce flat die forgings exclusively from electric steel. Recent increases in electric furnace installations all over the country prove the wisdom of the early use of that quality of steel by National Forge. The well-known and proven merits of electric steel make certain an *extra* quality in all our forgings By this process we can produce most analyses, quickly and economically and in ingot sizes and weights tailored to fit the job.

Highly stressed forgings such as the Diesel Locomotive Crankshaft illustrated here require the maximum in strength and resistance to fatigue, wear and shock, *and are truly outstanding*. The steel for these crankshafts necessarily must have extreme cleanliness and be free from inclusions, segregation and other detrimental defects. The steel also must be made in strict conformity to chemical limitations and with such uniformity that in subsequent forging and heat treating, production processing is made possible. The severity of the steel inspection in the making of these crankshafts insures from the beginning that outstanding quality will be maintained.

When next you need forgings, let us talk over with you their use, specifications and manufacture, the NATIONAL FORGE WAY, with all operations under one roof, one control and one responsibility—and with basic quality assured by National Forge Electric Steel.

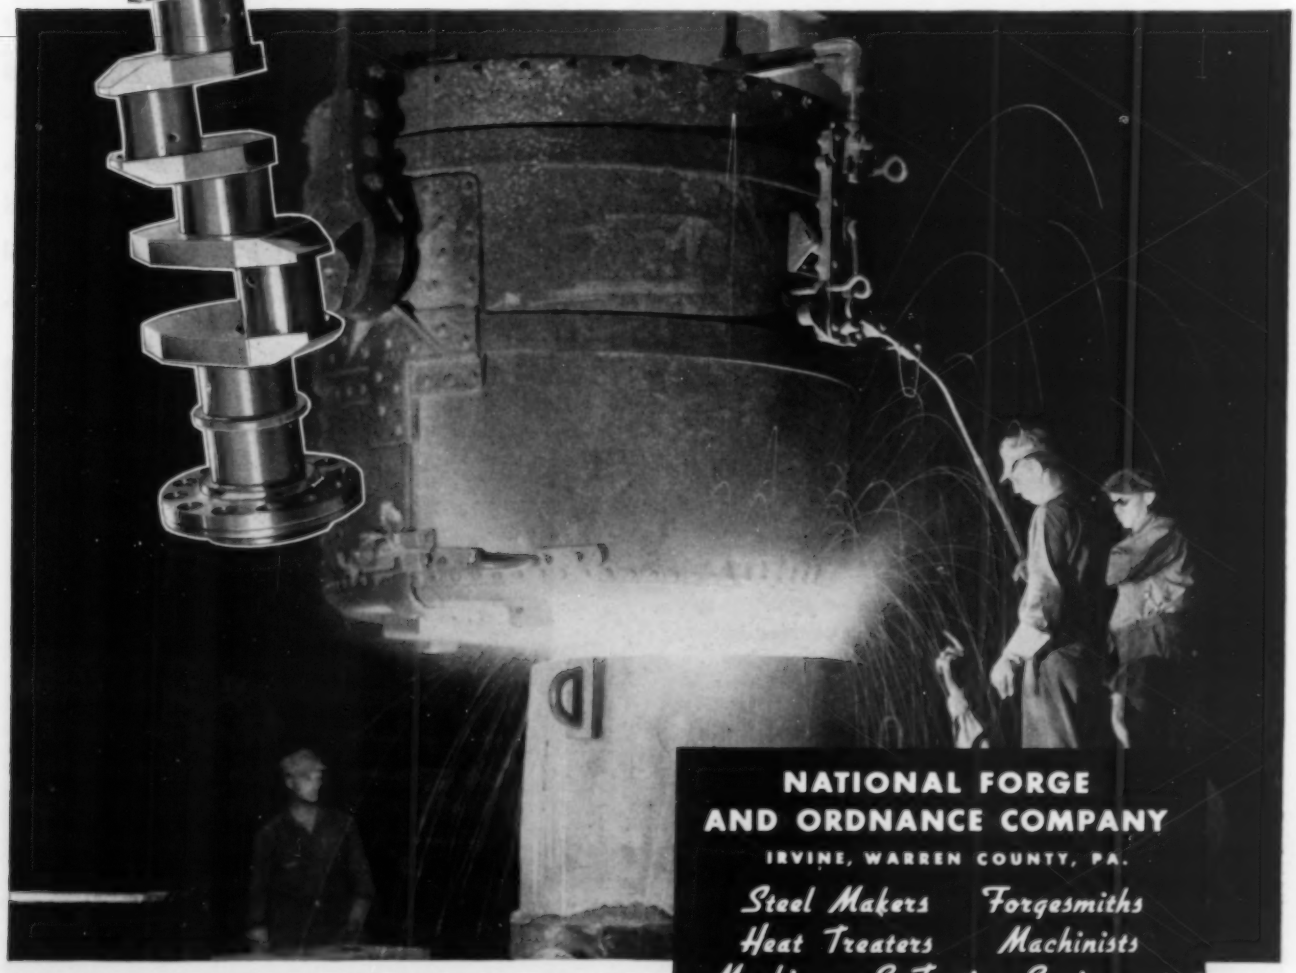

NATIONAL FORGE AND ORDNANCE COMPANY

IRVINE, WARREN COUNTY, PA.

Steel Makers *Forgesmiths*
Heat Treaters *Machinists*
Machinery & Testing Equipment Manufacturers

CLASS **VL**

Vogt

Steam Generating Units

for POWER *or* PROCESSING LOADS, *and* HEATING

The design provides large furnace volume and a high ratio of radiant heating surface. Proper combustion is assured with any fuel or method of firing. Superheaters, air preheaters, economizers, water walls, and soot blowers can be readily incorporated. Vogt Class VL Steam generating units are giving satisfactory service in Hotels, Sugar Refineries, Steel Mills, Furniture Factories, Distilleries, Oil Refineries, and related industries. A bulletin showing typical installations will be sent upon request.

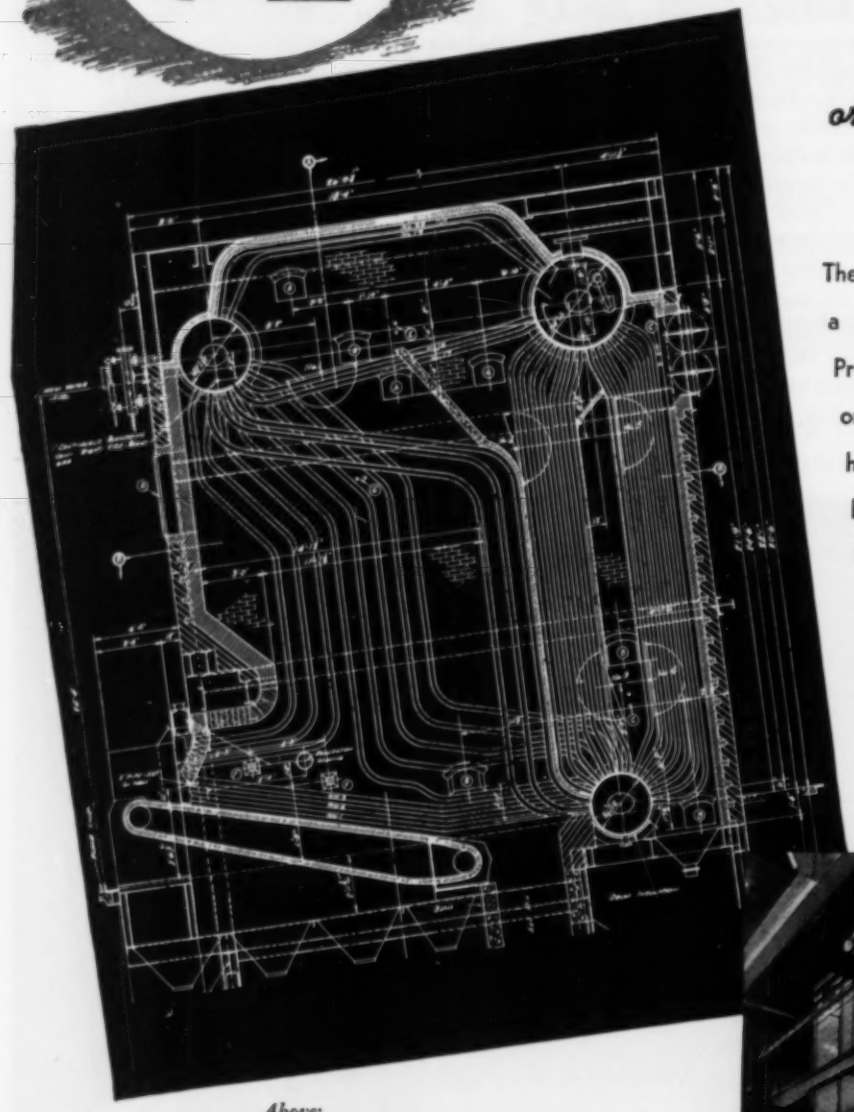

Above:
This 90,000 lbs. steam per hour unit, designed for 475 lbs. pressure, serves the Mansfield Tire & Rubber Co., Mansfield, Ohio.

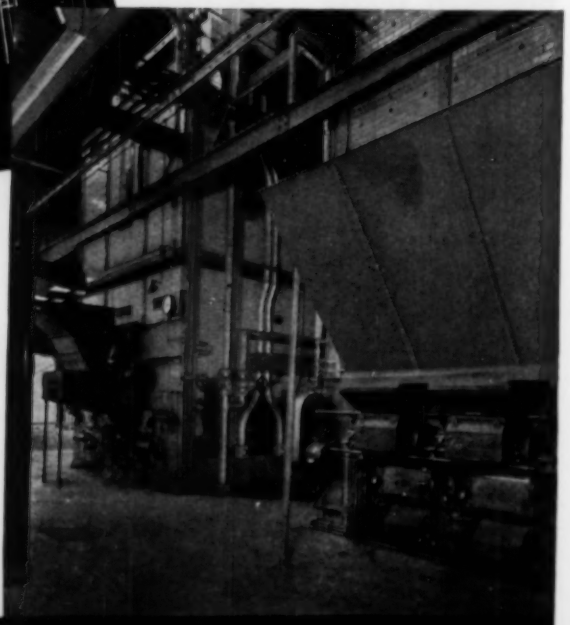

Right:
Two 515 H.P. units installed in Brown-Forman Distillers Corporation, Louisville, Ky. Plant.

HENRY VOGT MACHINE CO. • 1000 W. Ormsby St., Louisville 10, Ky.
Branch Offices: New York, Philadelphia, Cleveland, Chicago, St. Louis, Dallas

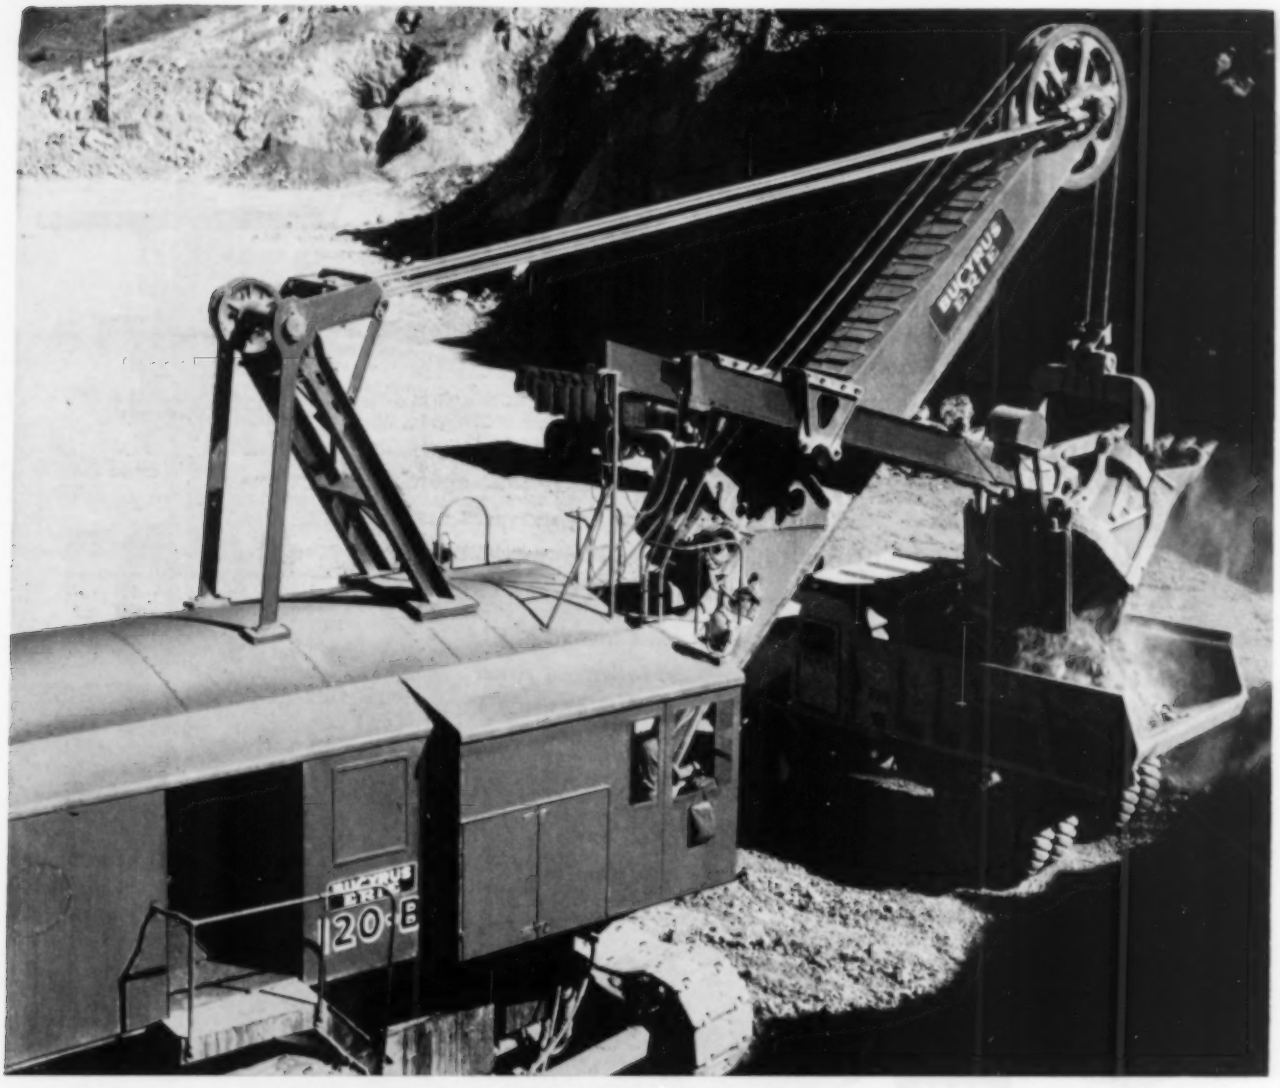

Seven Keys to OUTPUT

Here are seven good reasons why Bucyrus-Erie's 5-cubic yard 120-B gives you big output at low cost:

1 PERFECT CONTROL — Responsive Ward-Leonard variable voltage control makes it easy for the operator to maintain a fast, productive pace throughout the shift.

2 BALANCED DESIGN — Efficient weight placement and balanced speeds and power mean smooth operating action . . . there's no excess weight anywhere to slow cycle time.

3 DIGGING FORCE — Maximum effective digging force is applied to dipper teeth because long upper boom section, big sheaves and single-part hoist give wide angle between line of bail pull and line of backward thrust.

4 WIDE RANGE — 120-B's long range and high lift make it possible to handle wide cuts efficiently, with minimum time lost in moving or loading.

5 FAST SWING — Full-revolving 120-B has twin vertical swing units providing fast acceleration and deceleration for a smooth, speedy swing that steps up output.

6 MANEUVERABILITY — Strong, flexible 120-B mounting provides a firm digging foundation, permits quick moves anywhere in the pit.

7 "YEARS AHEAD" ENGINEERING — The 120-B is designed for years of outstanding service under hard working conditions. Built of carefully selected steels and alloys for strength and durability, 120-B design embodies unequalled world-wide experience in the manufacture of excavating machinery.

BUCYRUS ERIE

SOUTH MILWAUKEE, WISCONSIN

73L49

For the best in power piping...
Look to the complete CRANE line

STEEL VALVES FOR GENERAL STEAM SERVICES

You can count on Crane Cast Steel Wedge Gate Valves for dependable performance under the most severe service conditions. Straight-through ports minimize turbulence, erosion and resistance to flow. Long, close-fitting disc guides assure tight seating.

Strong tee-head disc-stem connection, easily lubricated yoke bushing, and ample bearings provide smooth operation. Made of Carbon or Alloy Steel suitably trimmed for pressures and temperatures up to 2500 pounds at 1000° F. Available with flanged, screwed, or welding ends. See your new No. 49 Crane Catalog.

CRANE CO., 836 S. Michigan Ave., Chicago 5, Ill.
Branches and Wholesalers Serving All Industrial Areas

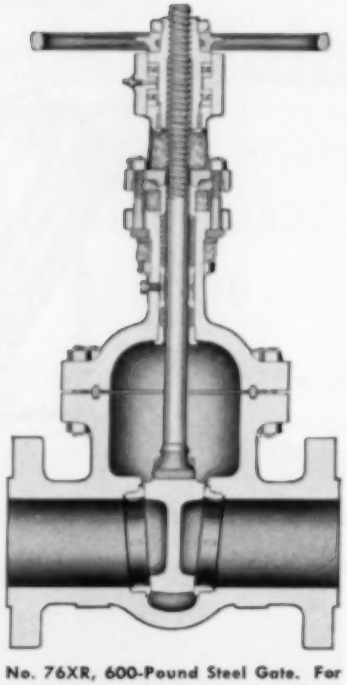

No. 76XR, 600-Pound Steel Gate. For steam or water up to 850° F.; Exelloy to Nickel-Alloy Seating. Also available with welding ends. Sizes: 2 to 24 inch.

THIS STEAM TURBINE PIPING INSTALLATION CAN BE 100% CRANE ON ONE PURCHASE ORDER

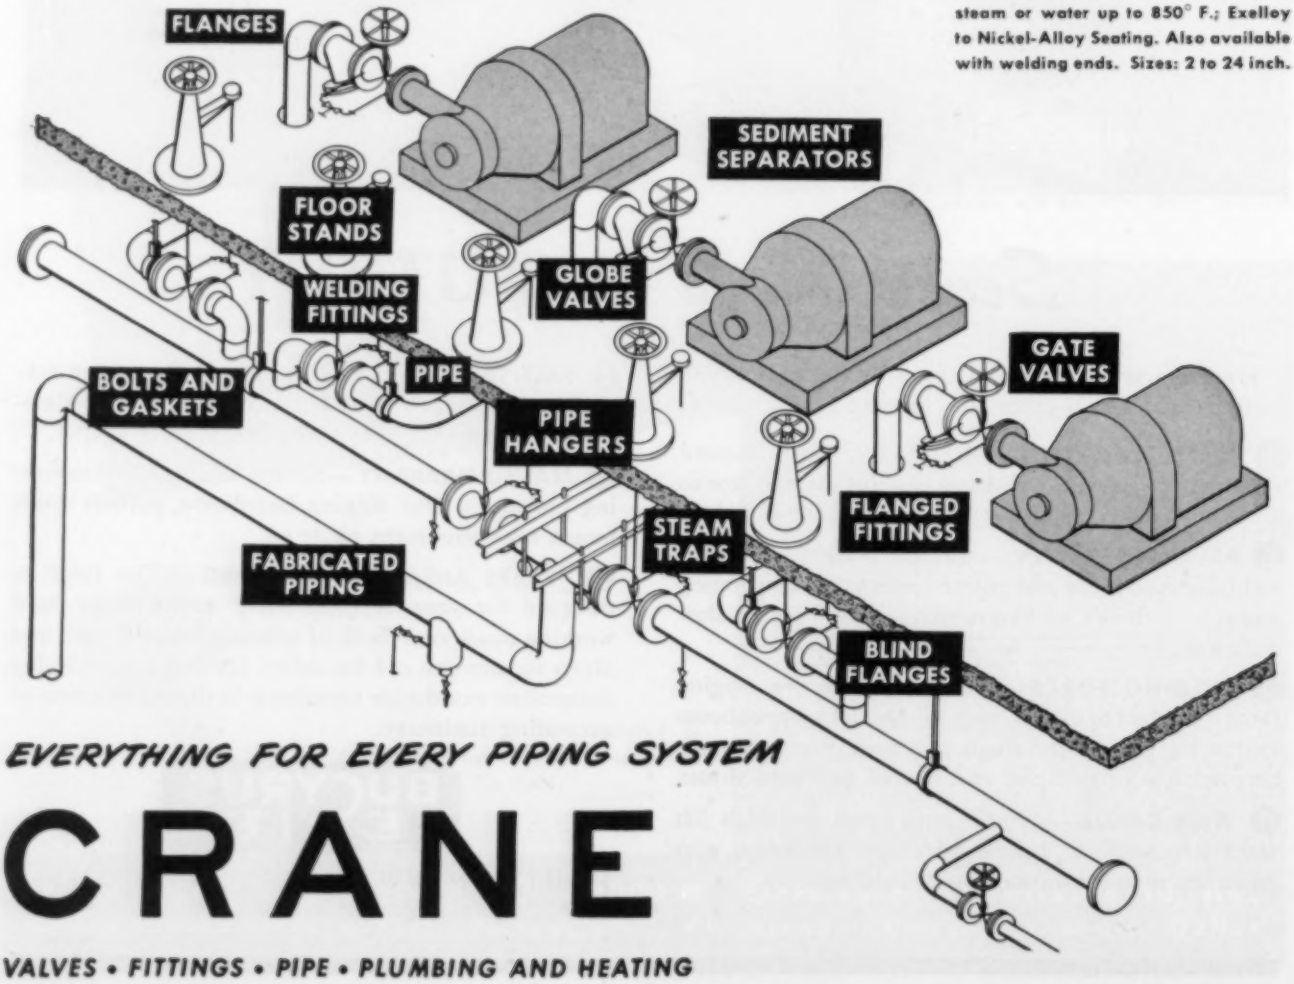

EVERYTHING FOR EVERY PIPING SYSTEM

CRANE

VALVES • FITTINGS • PIPE • PLUMBING AND HEATING

No other steam turbine offers you

SUCH VERSATILE STEAM NOZZLE CONTROL

The larger number of hand valves you see on a Coppus Steam Turbine promises you greater operating economy. At least 60% of the steam nozzles can be individually controlled to give maximum steam pressure in steam chest . . . a guarantee of best water rates at any load. Maintenance economy, too, is assured by the hard chromium plating of the shaft at the stuffing box. It provides the best possible smooth, non-corrosive surface for packing rings.

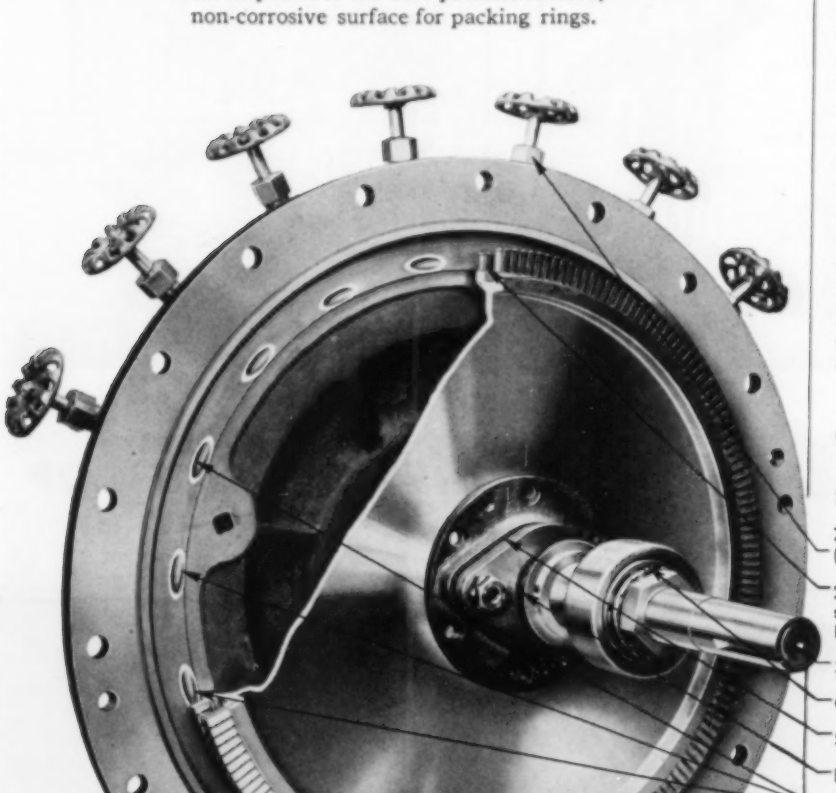

- 7 hand valves for efficient partial load operation, (20" turbine shown)
- 2 row velocity-stage turbine wheel with stainless steel turbine buckets — statically and dynamically balanced
- 30-40 carbon steel shaft
- Oversized double row deep grooved ball bearing
- Stuffing box with metallic packing ring
- Heavy chrome plating of shaft through stuffing box
- 3 nozzles always open

Coppus Steam Turbines, Type TF, driving chemical transfer pumps at Celanese Corporation of America's Chemcel Plant

Coppus Steam Turbines ranging from 150 hp down to fractional in 6 frame sizes

MAKE TURBINE DOLLARS GO FARTHER

Why waste money buying turbines with higher horsepower ratings than you need? The higher the horsepower rating, the higher the price. Save money by selecting the Coppus Turbine size closest to your requirements from 150 hp down to fractional. And when you do, you save operating and maintenance costs, too. That's what these other Coppus features are designed to do: exclusive pilot operated excess speed safety trip supplementing constant speed governor; choice of metallic or carbon ring packing assemblies. Designs available for back pressures up to 75 pounds; replaceable cartridge type bearing housings. For full details . . .

WRITE FOR BULLETIN 135

COPPUS ENGINEERING CORP.,
204 Park Avenue, Worcester 2, Mass.
Sales offices in THOMAS' REGISTER.

COPPUS "BLUE RIBBON" TURBINES

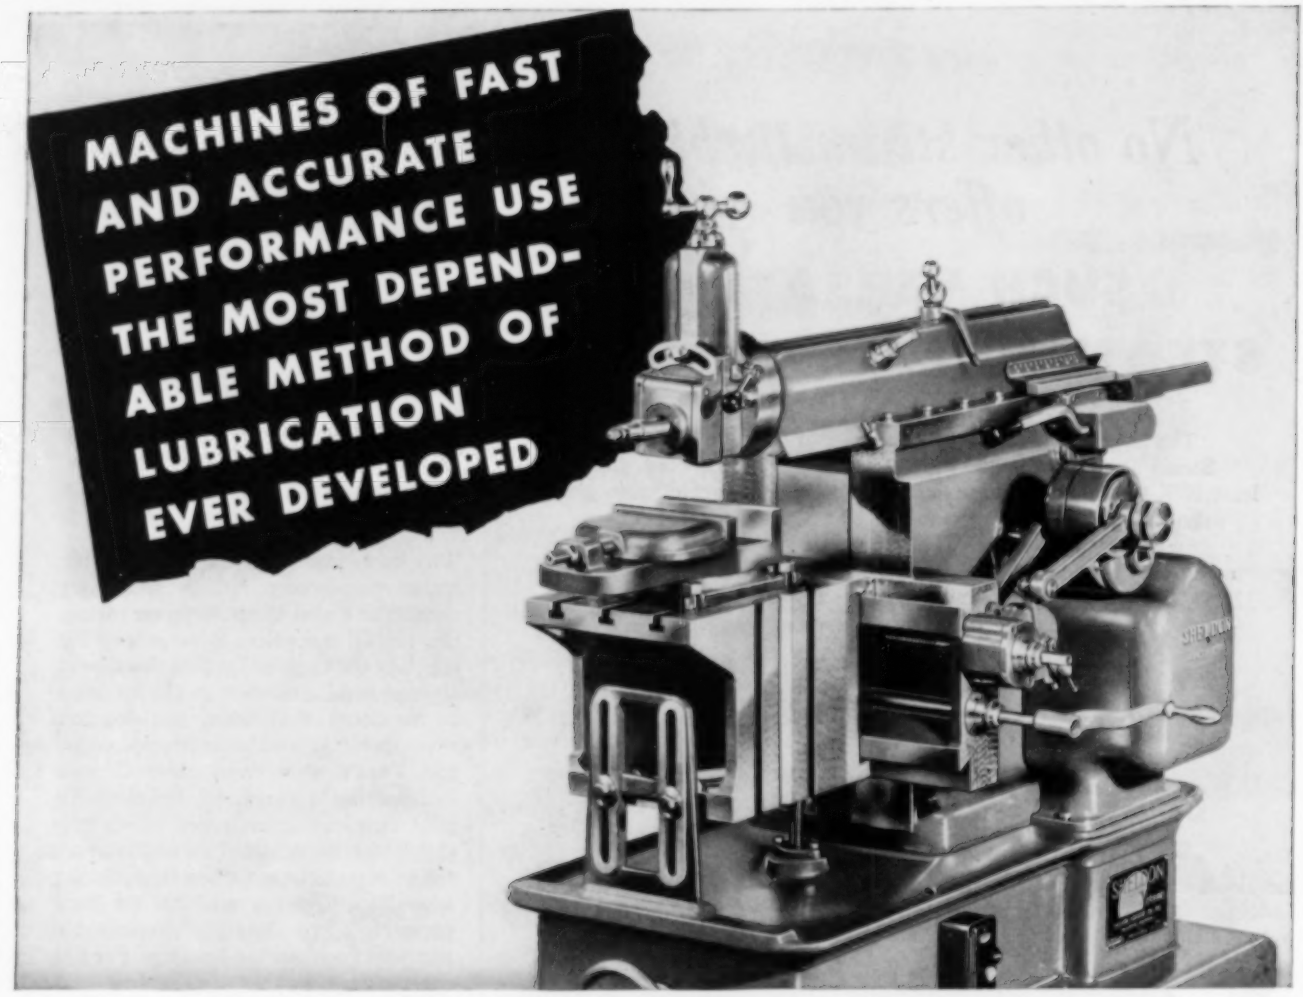

MADISON-KIPP *Fresh Oil* BY THE MEASURED DROP

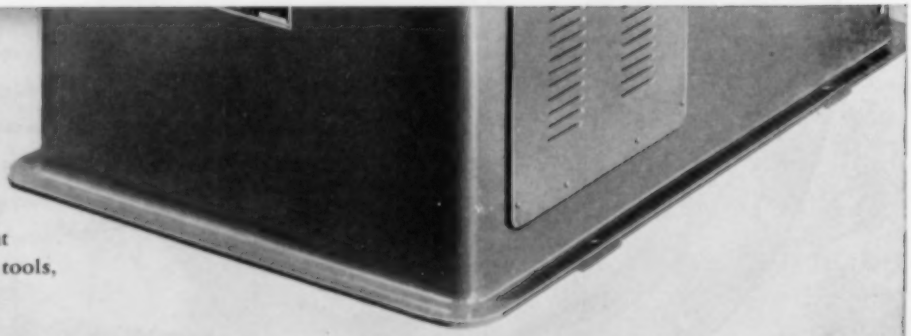

On the Sheldon 12" Back Geared Shaper insures dependable lubrication to the important bearings including the ways. There are Madison-Kipp Lubricators for original standard equipment for almost every type of machine tools, work engines, and compressors.

MADISON-KIPP CORPORATION

202 WAUBESA STREET, MADISON 10, WIS., U.S.A.

ANCIENS ATELIERS GASQUY, 31 Rue du Marais, Brussels, Belgium, sole agents for Belgium, Holland, France, and Switzerland.

WM. COULTHARD & CO. Ltd., Carlisle, England, sole agents for England, most European countries, India, Australia, and New Zealand.

- *Skilled in* DIE CASTING *Mechanics*
- *Experienced in* LUBRICATION *Engineering*
- *Originators of Really High Speed* AIR TOOLS

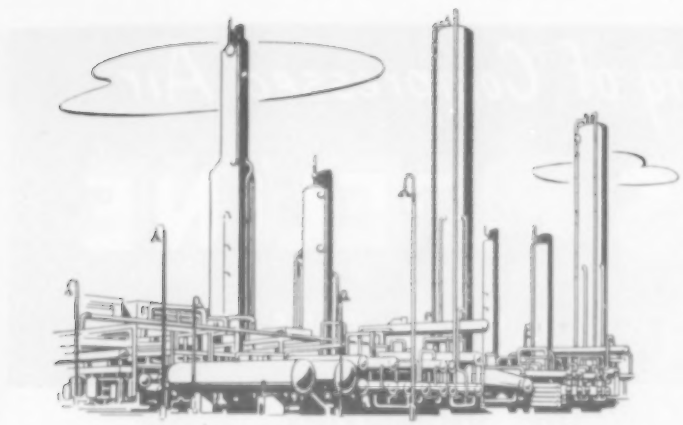

The New Slaughter Gasoline Plant

uses

PKVG

Gas-Engine-Driven Generator Units

for supplying

ALL ELECTRIC POWER

Here, in one of the world's largest high-pressure casing-head gasoline plants at Slaughter Field, Texas, eight companies have united to obtain the most efficient utilization of natural gas. And here—as in so many other petroleum plants the world over—you'll find Ingersoll-Rand 4-cycle gas engines on the job 24 hours a day. Six powerful, economical Type PKVG engines drive six 800-kw, 2300-volt generators that supply all electric power for the entire plant.

For simplicity, efficiency, smooth quiet operation, and rugged dependability, the PKVG has no equal. Ingersoll-Rand 4-cycle, V-design means maximum fuel and lubricating oil economies, and extra stability of power and close speed control at all loads. Simplicity and accessibility of all parts mean easier maintenance —and less of it. Built in 600 to 1320-hp sizes, the PKVG is conservatively rated and will handle any kind of load . . . and so will the smaller PVG, sizes 185 to 407 hp. For complete information, see your nearest I-R representative . . . or if you need gas-powered *compressors*, ask about the JVG, SVG, and KVG, sizes 110 to 1320 hp.

Ingersoll-Rand

11 Broadway, New York 4, N. Y.

COMPRESSORS • AIR TOOLS • ROCK DRILLS • CONDENSERS • TURBO BLOWERS • CENTRIFUGAL PUMPS • OIL & GAS ENGINES

488-6

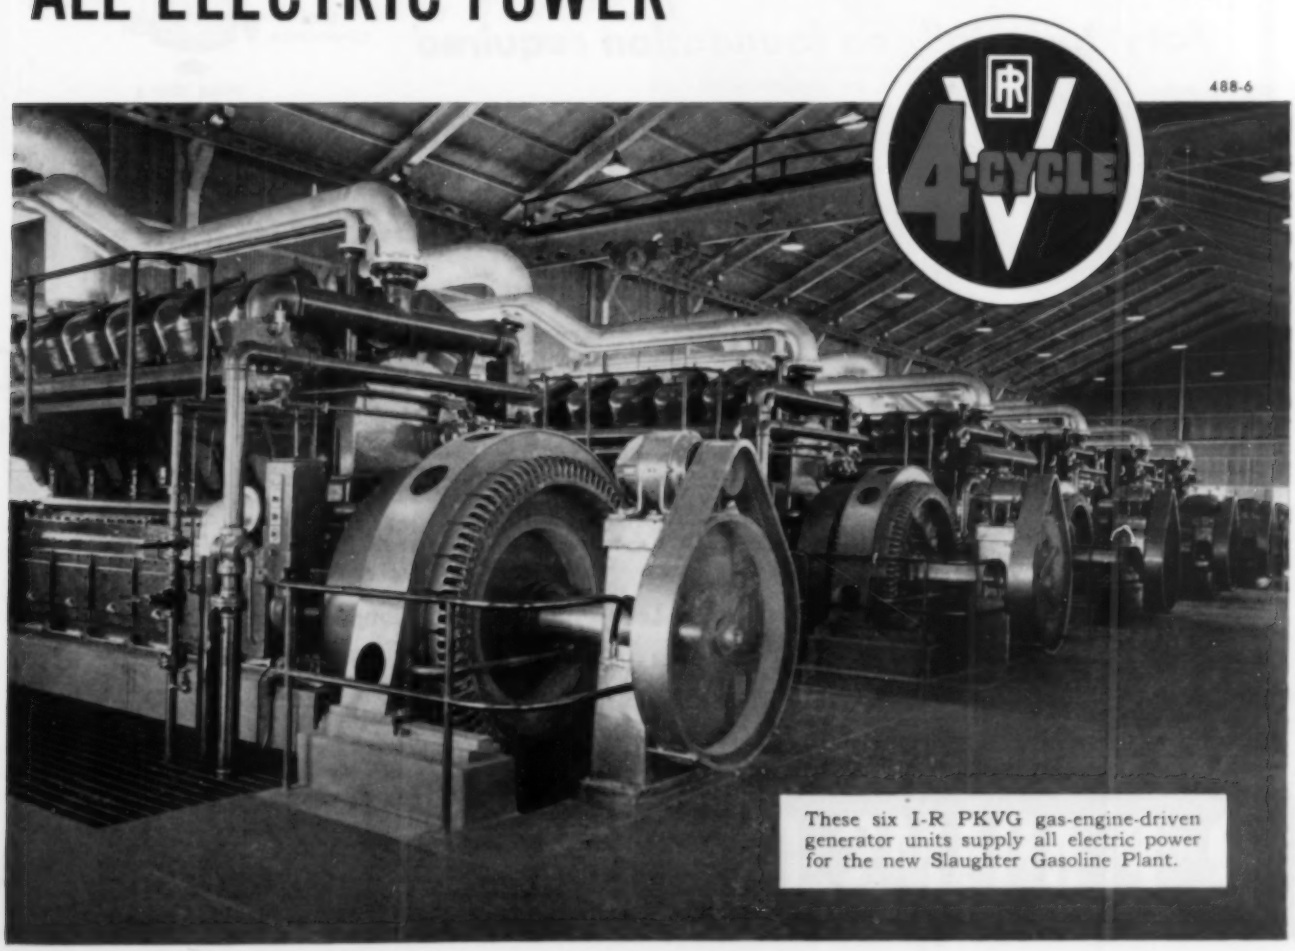

These six I-R PKVG gas-engine-driven generator units supply all electric power for the new Slaughter Gasoline Plant.

Complete Conditioning of Compressed Air

by ADAMS PIPELINE

AFTER COOLER and AIR FILTER

Thousands in use in Leading Industries
RESULTS GUARANTEED

ADAMS Aftercooler and Cyclone Separator

ACTION

- Cools compressed air to within a few degrees of cooling water
- Through this cooling, vaporized water and oil are condensed—and completely removed by Cyclone Separator

BENEFITS

- The dry, clean air prevents failing of instruments
- Reduces wear and tear on air tools and pneumatic machinery
- Prevents freezing pipes in winter
- Prevents rust and pipe scale in distribution lines

Easy to install, no foundation required

Send for Bulletin 704

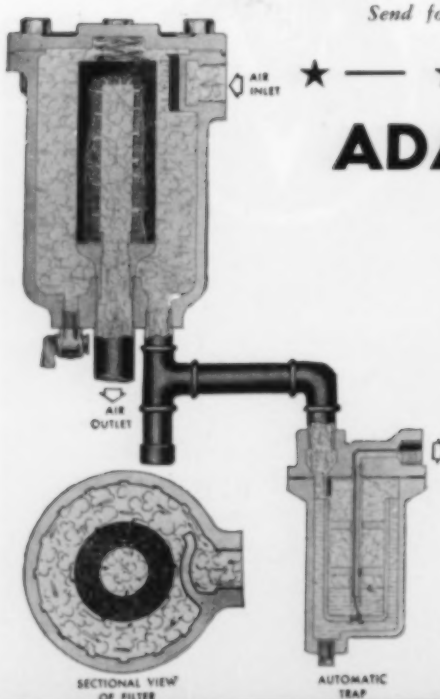

★ — ★ — ★ — ★ — ★ — ★ — ★ —

ADAMS PORO STONE Air Filters

Protect Instruments and Air Tools —Insure Better Work

The Adams Poro-Stone Filter gives continuous service without attention or maintenance expense. Efficient centrifugal separation *plus* diffusion through Poro-Stone, removes liquid and solid contamination completely without pressure loss.

Automatic Trap eliminates attention and assures continuous and efficient filter operation.

Learn how Adams Conditioning means Trouble-free use of Compressed Air

Send for Bulletin 105, and accept our 30-day FREE TRIAL on ADAMS Poro-Stone Air Filters.

R. P. ADAMS CO., INC.

209 E. PARK DRIVE
BUFFALO 17, N. Y.

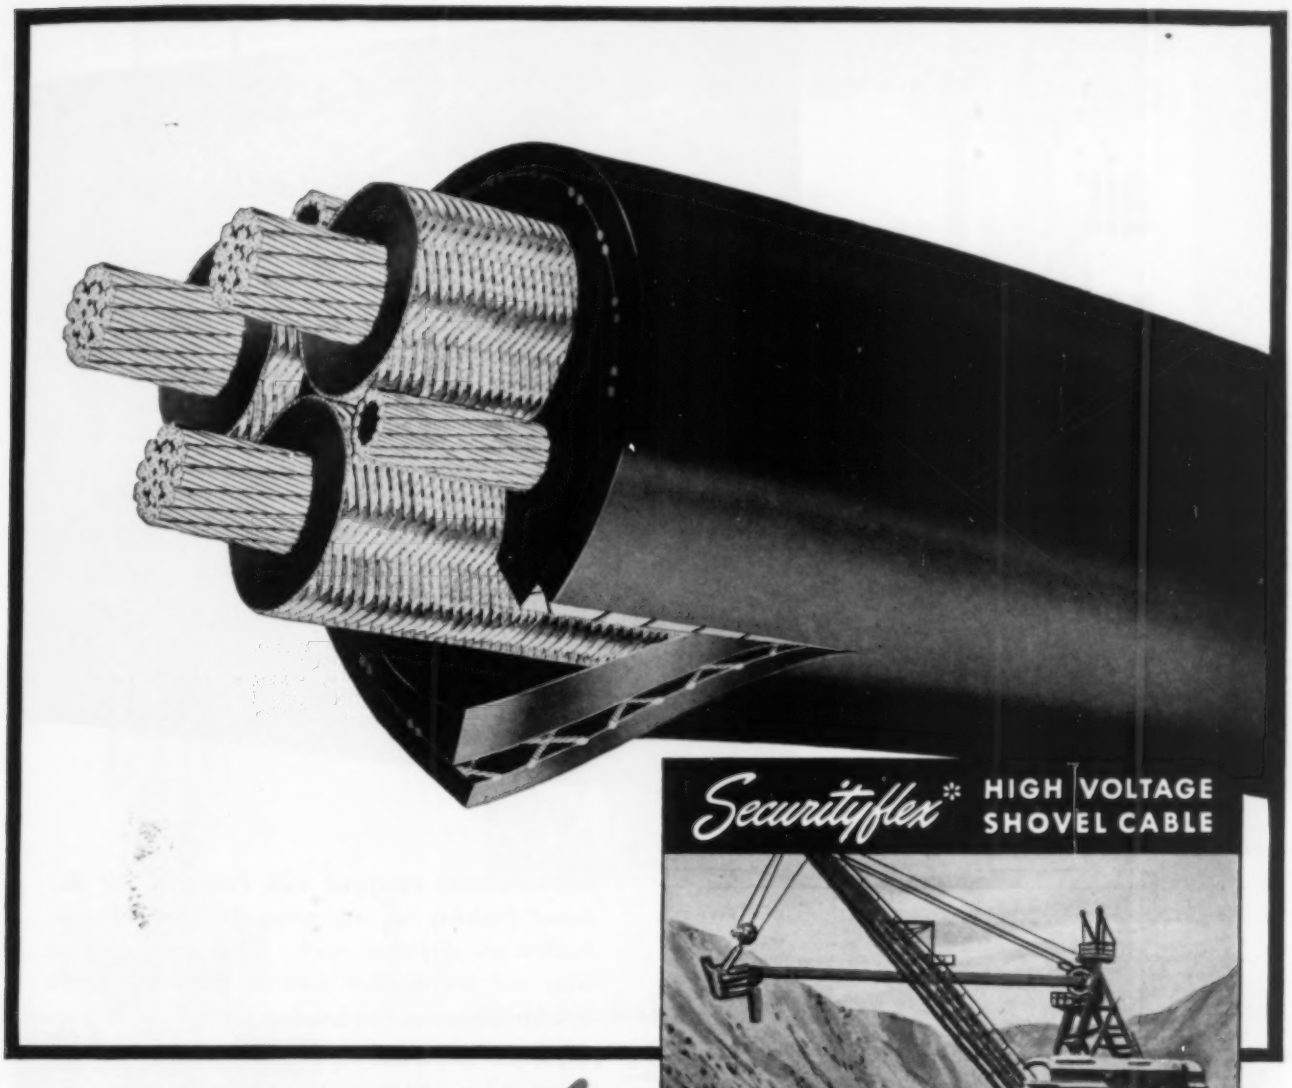

Securityflex* HIGH VOLTAGE SHOVEL CABLE

Engineered
TO REDUCE DOWN-TIME

DON'T let costly electrified equipment be hampered by cable failures; invest in Securityflex High Voltage (Type SHD) Shovel Cable.

Patented grounding wires with neoprene cores are cushioned against shock, contact conductor shields at six points . . . revolutionary AB* insulation gives new resistance to corona discharge, moisture, is approved for 75° C... inner-belt-and-filler-combined conducts heat away for cooler operation under extreme overloads . . . new type conductor shields lie flatter, are easier to splice, can't chafe . . . extra rugged neoprene jacket resists flame and abrasion . . . cable won't kink. Here is a cable *engineered to reduce down-time.*

Write for Anaconda booklet DM 4822, which gives complete information on shovel cable. Anaconda Wire & Cable Company, 25 Broadway, New York 4, N. Y.

45478

ANACONDA *Securityflex** **MINE CABLE**

*An Anaconda Trade-Mark

ANACONDA
from mine to consumer

air released clutch saves compressor wear

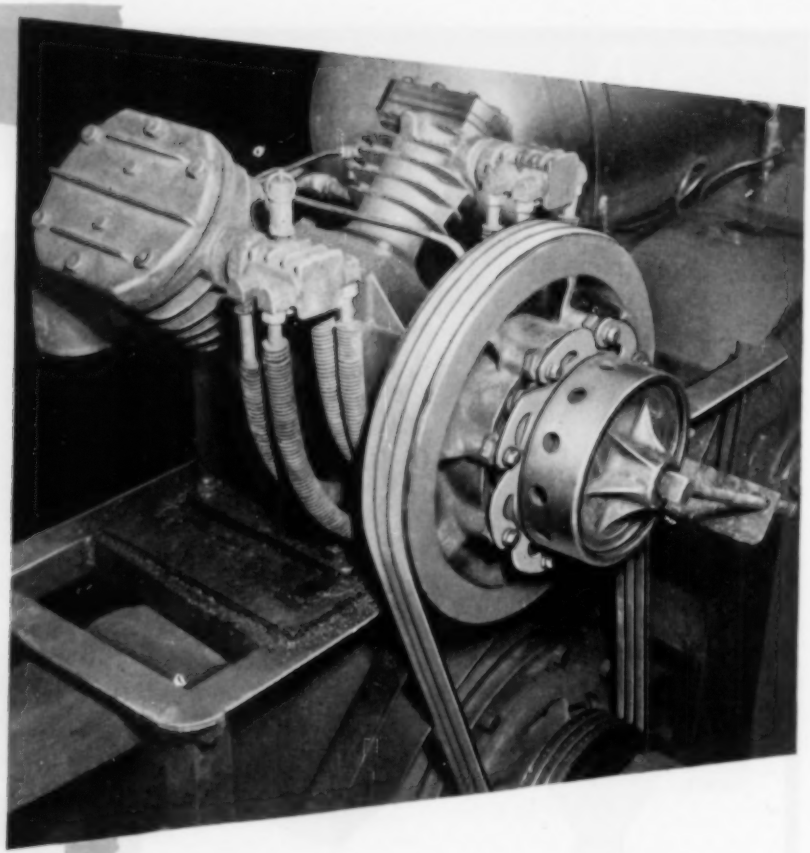

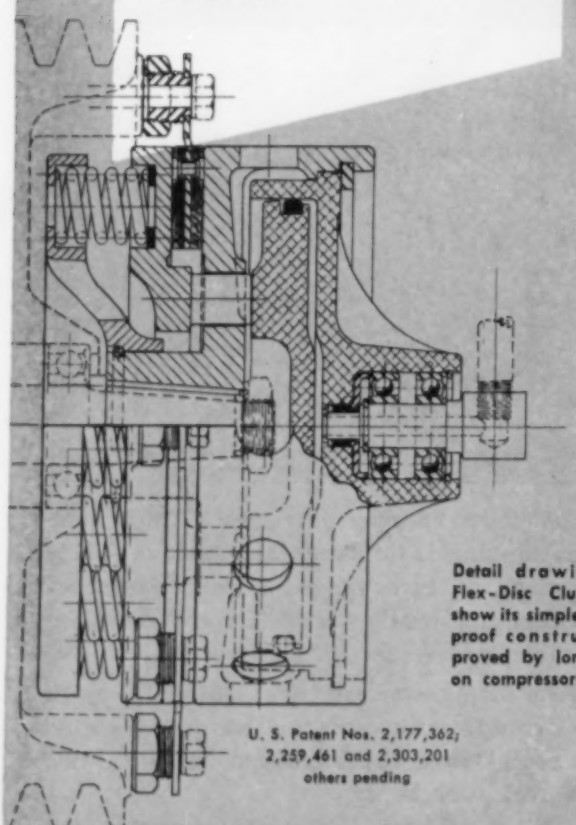

Detail drawing of Flex-Disc Clutch to show its simple, foolproof construction proved by long use on compressors.

U. S. Patent Nos. 2,177,362; 2,259,461 and 2,303,201 others pending

COMPRESSORS equipped with *Flex-Disc Air Released Clutches* run only when air is needed. *Unloaders are dispensed with.* That saves a lot of wear and maintenance costs on the compressor's cylinders, pistons, and bearings.

When maximum air pressure is reached a regulator valve admits air to cylinder to release the clutch and stop the compressor. Flywheel and drive plate keep on running without drag or heating. A drop in air pressure causes the regulator valve to release air from the clutch cylinder and reestablish drive to the compressor.

Pictured above is a compressor with *Flex-Disc Air Released Clutch* operating on an oil drilling rig in Texas. Like the *Flex-Disc Clutches* used for many years past on I-R Portable Compressors, this clutch is spring-loaded to engage. It is air-released.

The *Flex-Disc Air Released Clutch* is available in a range of sizes and for many varying applications outside the compressor field.

INDUSTRIAL CLUTCH CORPORATION

Waukesha Wisconsin

Walworth bronze valves...

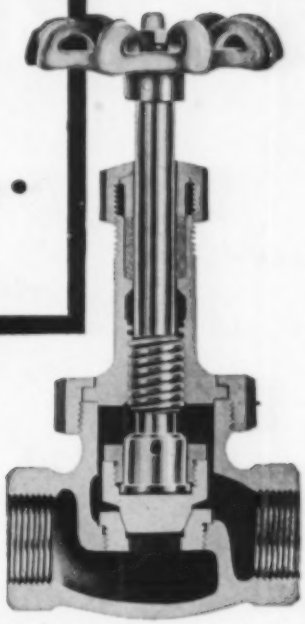

Walworth No. 225P Globe Valve
500 Brinell Seat and Disc

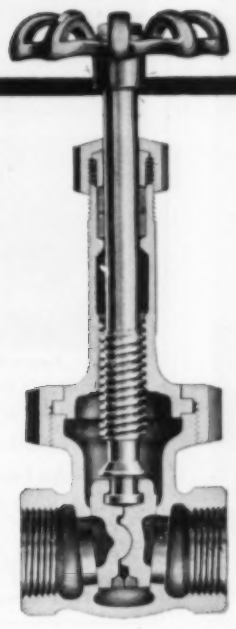

Walworth
No. 29 Gate Valve

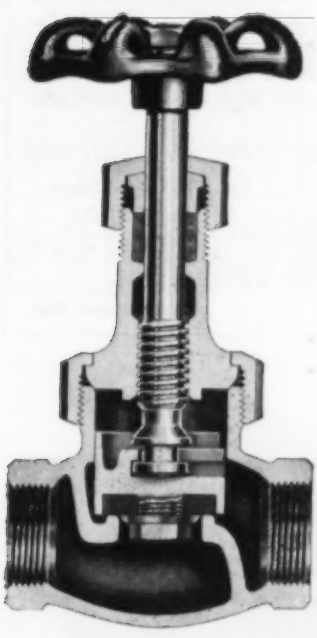

Walworth No. 95 Globe Valve
Re-New-Disc

built to give dependable trouble-free service on all recommended jobs

Walworth No. 95 Bronze Globe Valves (Angle Type: No. 96) are recommended for service where throttling is not required. They are rated at 150 psi working steam pressure, 500F; 300 psi cold water, oil or gas. The improved renewable disc and lock-on, slip-off disc holder — an original Walworth development—saves time and trouble. This valve can be repacked under pressure when fully opened. All parts are designed to give maximum service and strength.

Walworth No. 29 Bronze Gate Valves are rated at 200 psi working steam pressure, 550F; 400 psi cold water, oil and gas. These valves have rising stems and integral seats. Sizes 2-inch and smaller have union bonnets; sizes 2½ and 3-inch have bolted bonnets. Valves up to and including ¾-inch have solid wedge discs; 1-inch and larger have split wedge discs. These valves can be repacked under pressure when fully opened.

Walworth No. 225P Bronze Globe Valves (Angle Type: No. 227P) are rated at 350 psi working steam pressure, 550F; and 1000 psi non-shock service on cold water, oil and gas. The stainless steel, plug type seat and disc — heat treated to 500 Brinell — can be closed on sand, slag, scale and similar floatage, without injury to the seating surfaces. They are the longest wearing, TOUGHEST bronze valves you can buy.

For full information about Walworth Quality Bronze Valves, see your Walworth distributor, or write:

WALWORTH
valves and fittings
60 EAST 42nd STREET NEW YORK 17, N. Y.

QUESTION:

Which Garlock gasket sheet is recommended for hot oils, steam or hot gases up to 700°F?

ANSWER: **Garlock 7021**

GARLOCK 7021 Compressed Asbestos Sheet Packing is an ideal gasketing material for use against high temperatures and extreme pressures. It is sufficiently compressible to compensate for normal irregularities in flange faces but resistant to plastic flow under heavy bolt loads. Specially recommended for severe oil and steam service. A Garlock representative will call upon request.

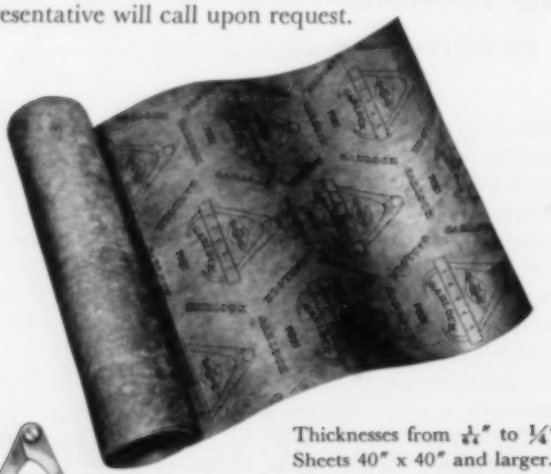

Thicknesses from $\frac{1}{64}$" to $\frac{1}{4}$". Sheets 40" x 40" and larger.

THE GARLOCK PACKING COMPANY
PALMYRA, NEW YORK

In Canada: The Garlock Packing Company of Canada Ltd., Montreal, Que.

GARLOCK

PACKINGS, GASKETS AND OIL SEALS

NEWS! For Pneumatic Equipment Users

It's the Safety Valve that Reduces your Operating Costs and Increases Safety Factor of Pneumatic Equipment.

HOW AND WHY IT DOES ALL THIS FOR YOU!





Patents Pending

The Danielson Safety Valve is a rugged, one-piece brass unit in which ONE MOVING PART —a stainless steel ball is locked.

This simple, dependable safety check, installed at compressor outlet, or manifold, shuts off all flow instantly when line is broken or uncoupled.

Ball, governed by air or gas flow through chamber, lies undisturbed in bowl under normal conditions. (Upper View) Excesive flow causes ball to go into shutoff position, with bleeder port open. (Lower View) Gravity drops ball into bowl after line is ready for use.

LOW-PRICED WIDELY USED APPROVAL NO. 2200

Write for Folder and Prices Cal. Div. Indus. Safety

Immediate Delivery on Stock Sizes ¼" through 2" Dia. Larger Sizes on Special Order

Danielson Safety Valves, Inc.

224 Sixth Street **Richmond, Cal.**

No Moisture Removal System is Complete . . . without Economical Armstrong Air Traps

No. 71 Snap Action Trap $30.00



No. 21 Ball Float Trap $11.00



No. 213 Inverted Bucket Trap $20.75

KEEP your expensive moisture removal equipment at top efficiency — automatically drain these vital units of the moisture they collect with low cost Armstrong Air Traps. Armstrong traps on separators, aftercoolers, etc., save you air, time and labor, eliminate human failure.

Ruggedly built, these units are available in three types, ball float, snap action or inverted bucket models to give you best service for a given condition.

Bulletin No. 1433 gives the details.

Local stocks mean quick delivery. Act today.

ARMSTRONG MACHINE WORKS
885 Maple St. • Three Rivers, Michigan

ARMSTRONG Air TRAPS

NEW! Low Cost *Micro-Mesh* DONALDSON AIR CLEANER!



- LESS THAN ONE MINUTE SERVICING.
- HIGH DUST-TRAPPING EFFICIENCY
- MICRO-MESH KNIT COPPER ELEMENT
- NOTHING TO WEAR OUT OR REPLACE

No Tools Required for Servicing

To service, squeeze snap ring together with fingers, removing ring and outer screen. Lift out element . . . wash in kerosene or other solvent. Re-oil and re-insert in cleaner body and replace screen and snap ring. Body of air cleaner need not be removed.

Efficient . . . compact . . . simple to attach and service . . . the new Donaldson Micro-Mesh air cleaner meets every qualification for installations where air requirements are moderate, yet its cost is less than that of oil-washed types. It filters efficiently at any angle, simplifying design problems. Dust entering cleaner is trapped on an oil-wetted filter element, knit from a continuous strand of crimped copper ribbon. Uniform in density, the filter element is placed in the deep-drawn, terne-plate body under slight compression. It will not break down, shift or sag.

Sample Cleaner Sent On Request

DONALDSON COMPANY INC.

666 PELHAM BLVD. • ST. PAUL 4, MINNESOTA

BUY BOTH BOOKS FOR $5.00

Price Individual Books	Per Copy
Compressed Air Data	$3.00
Cameron Hydraulic Data	3.00

COMPRESSED AIR MAGAZINE, 942 Morris Street, Phillipsburg, New Jersey.
Please send me:

- ☐ Compressed Air Data and Cameron Hydraulic Data..Both books for $5.00
- ☐ Compressed Air Data.....$3.00
- ☐ Cameron Hydraulic Data.....$3.00
- ☐ Enclosed is (money order) (check) for $.....) ☐ Send books C.O.D. I understand that the books will be sent me postpaid, and that they may be returned within 10 days if not satisfactory.

Name .....
Company .....
Street No. .....
City .....State .....Country .....

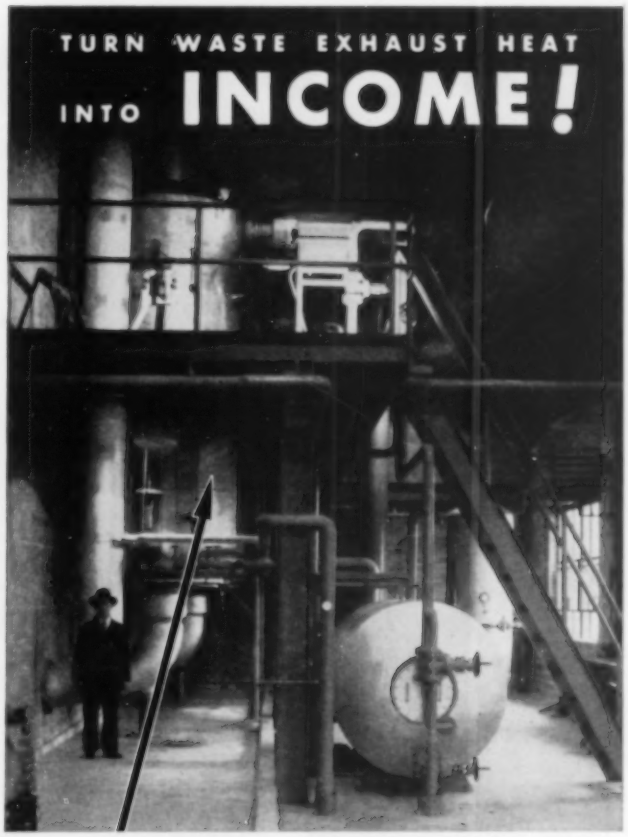

MAXIM HEAT RECOVERY SILENCERS

produce steam for plant heating and for sale to nearby customers

Close-up view showing two BVS Heat Recovery Silencers at New Prague; accumulator tank in left foreground.

The municipal power plant at New Prague, Minnesota makes good use of Maxim Heat Recovery Silencers. Waste exhaust heat that would normally go up the flue is used as it passes through the heat recovery silencers to produce usable and salable steam. The steam in this case is used for heating the plant itself, and surplus is sold for heating nearby homes, stores, and a factory.

Thus the New Prague municipal plant achieves effective and very necessary silencing of exhaust noise, but makes this silencing pay for itself many times over.

More and more industrial users, long accustomed to the necessity of effective silencing, are now realizing the profit possibilities of installing heat recovery silencers to produce steam for heating or processing operations, and without any extra fuel cost.

THE MAXIM SILENCER COMPANY

61 HOMESTEAD AVE. HARTFORD 1, CONNECTICUT

Please send bulletin on silencers for;

- ☐ Heat Recovery
- ☐ Exhaust
- ☐ Intake
- ☐ Spark Arrestors

Name _____
Company _____
Address _____

BE SURE IT'S A

MAXIM

Dayton Cog-Belts*

take a bite out of costs

40% more h.p. • fewer belts • fewer pulleys • longer life

You deliver 40% more horsepower per belt, can use fewer belts and pulleys, and save on the over-all cost of belting, with the patented and exclusive premium Dayton Cog-Belt*.

The Cog-Belt* is a V-Belt—but a *better* V-Belt. Using ordinary pulleys it pulls a 40% greater load. The reason: its teeth-like Cogs bend easily as your finger does when you crook it—compression is minimized, flexibility and strength multiplied, belts run cooler.

If you are having belt troubles—want to save drive space, simplify maintenance, convert easily from flat to V-flat—if you want a 40% better V-Belt, call your Dayton Distributor. He also has the famous Thorobred V-Belt.

THE DAYTON RUBBER COMPANY, DAYTON 1, OHIO

*T.M.

WHY AN AVIATION COMPANY SWITCHED TO COG-BELTS

A leading aviation company tested Dayton Cog-Belts* against the premium V-Belt of another manufacturer, on a thread-grinding machine. The set of Cog-Belts* ran 5260 hours, still intact; the other belts ran 1100 hours to failure. "Cogs" gave this user 478% more hours of service.

V-Belts by **Dayton Rubber**

WORLD'S LARGEST MANUFACTURER OF V-BELTS

Now For The First Time

A SMALLER, LIGHTER, HEAVY-DUTY DIESEL ENGINE

The Ingersoll-Rand TS

195-375 HP

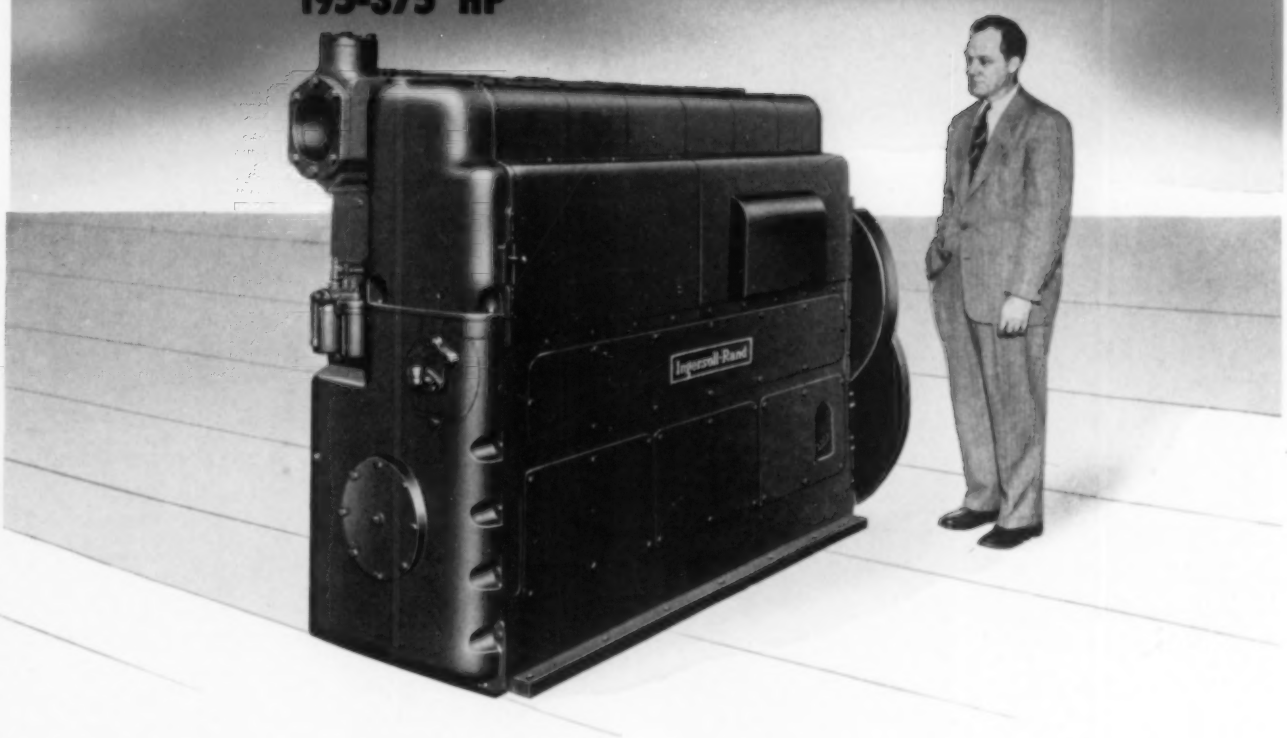

Here's the heavy-duty Diesel that engineers have been looking for . . . a 4-cycle, single-acting engine that weighs only 30 lbs per hp, and consumes only 0.40 lbs of fuel per hp-hour.

The Ingersoll-Rand TS Diesel is available with 6 or 8 in-line cylinders, delivering 195 to 375 continuous hp at 900 to 1000 rpm. What's more, the new TS Diesel has the extra stamina and dependability of big-engine design. Its 5¼"-diameter crankshaft is extra-large for a 7"-bore engine.

Movable	but NOT Automotive Type
Low Weight	but Moderate Speed
Small Size	but BIG-Engine Design
Powerful	but LOW Exhaust Temperatures
Perfect Balance	but NO Balancing Devices

These results have been achieved by using an improved combustion system with single-hole injection nozzles, a gear-driven supercharger providing additional scavenging air for internal cooling, an increased overlap of exhaust- and intake-valve openings, and a big crankshaft. One of the distinctive low-maintenance and long-life features is its aluminum-alloy full-floating bearings . . . with each half bearing being interchangeable for main and crankpin bearings.

Engineers who have seen the TS Diesel agree that it is the outstanding advance in diesel design in the past decade. Write today for more information on the new TS Diesel . . . or for greater power ask about the well-known S and SS Diesels up to 900 hp.

The New Ingersoll-Rand TS Diesel is ideal for:

Drilling Rigs	Locomotives	Emergency
Shovels	Drag Lines	Generating
Crushers	Cranes	& Pumping
Scrapers		Units

And for any service requiring continuous full-load economical operation.

Ingersoll-Rand
11 Broadway, New York 4, N. Y. 500-7

COMPRESSORS • AIR TOOLS • ROCK DRILLS • TURBO BLOWERS • CONDENSERS • CENTRIFUGAL PUMPS • OIL & GAS ENGINES

Compressor lives longer, works steadier with TIMKEN® bearings

INGERSOLL-RAND portable air compressors have Timken® bearings on the crankshafts to insure long life and uninterrupted service. There's less chance of breakdowns with Timken bearings—less maintenance time and fewer maintenance materials needed.

Timken bearings keep crankshafts in positive alignment, free from excessive deflection and endplay. Wear on surrounding parts is reduced. And because Timken bearings are manufactured to incredible precision, they permit closures that more effectively keep out dirt and retain lubricants.

Since Timken bearings are tapered in construction they carry any combination of radial and thrust loads. Line contact between rolls and races provides maximum load-carrying capacity. Timken bearings are made from the finest steel ever developed for tapered roller bearings—Timken alloy steel. Thanks to advanced design and materials, they normally last the life of the machine.

With over 50 years of bearing research behind them, Timken bearings are industry's first choice. No other bearing gives you *all* the advantages you get with Timken bearings. Specify them in the machines you build. Look for them in the machines you buy. The trademark "Timken" is your best guide to quality. The Timken Roller Bearing Company, Canton 6, Ohio. Cable address: "TIMROSCO".

This symbol on a product means its bearings are the best.

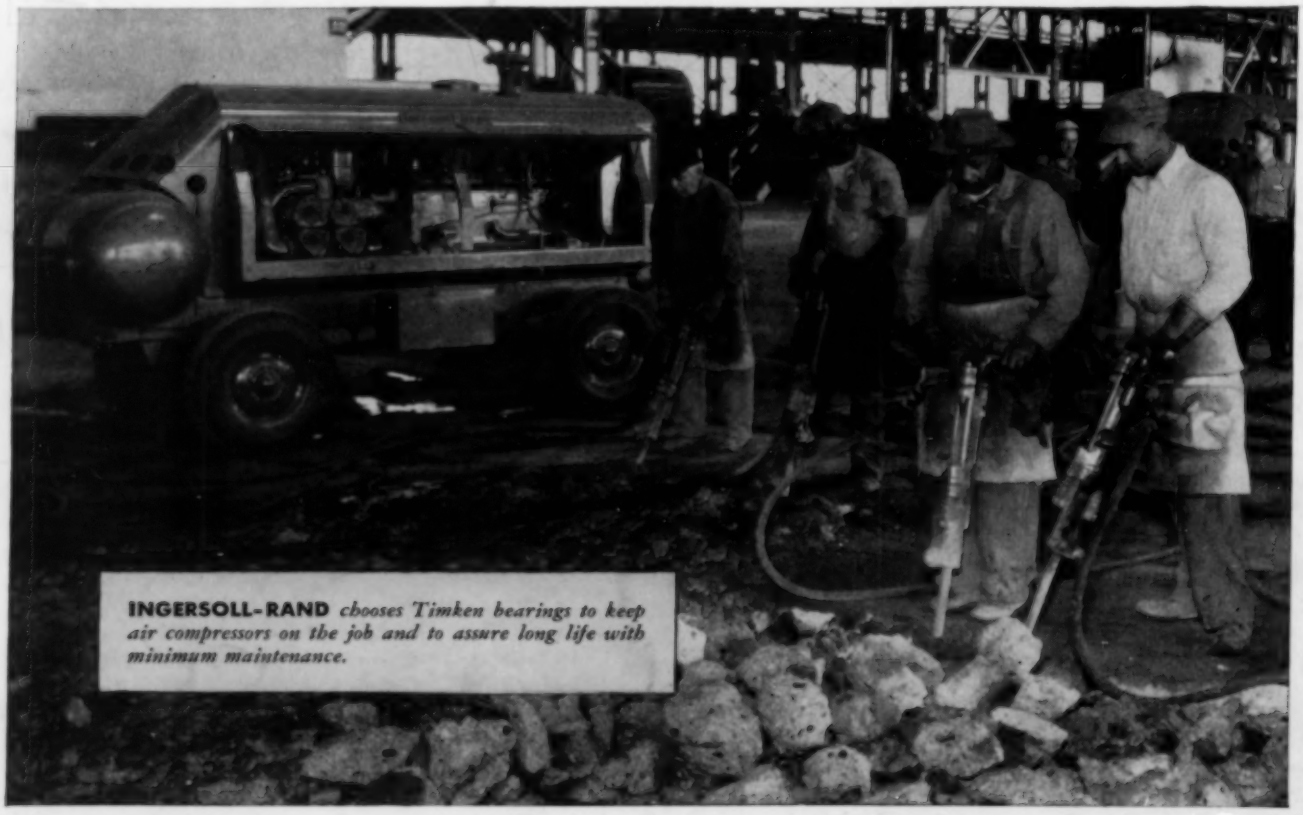

INGERSOLL-RAND *chooses Timken bearings to keep air compressors on the job and to assure long life with minimum maintenance.*

WE MAKE OUR OWN STEEL

The special grade alloy steel which gives Timken bearings their strength and resistance to wear, is made in our own steel mills.

The Timken Roller Bearing Company is the acknowledged leader in: 1. advanced design; 2. precision manufacturing; 3. rigid quality control; 4. special analysis steels.

TIMKEN

TRADE MARK REG. U. S. PAT. OFF.

TAPERED ROLLER BEARINGS



NOT JUST A BALL ○ NOT JUST A ROLLER ▭ THE TIMKEN TAPERED ROLLER ▭ BEARING TAKES RADIAL ⊡ AND THRUST →⊡← LOADS OR ANY COMBINATION ✳